

1508

E

30-045-25060

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit D Sec. 1 Twp 30 Rng 13

Name of Well/Wells or Pipeline Serviced Reid A 2-E

cps 6249w

Elevation N/A Completion Date 12/28/86 Total Depth 420' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 60', 180' 10 gallons per minute

Depths gas encountered: N/A

Type & amount of coke breeze used: 2200#

Depths anodes placed: 390, 380, 370, 360, 350, 340, 300, 290, 280, 270

Depths vent pipes placed: 420' of 1' vent pipe

Vent pipe perforations: 200'

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☒

6249W

Completion Date December 28, 1981


Well Name <u>Reed A #2-E</u>		Location <u>Union Texas Petroleum</u>		D 01-30-13	
Type & Size Bit Used				Work Order No.	
Anode Hole Depth <u>420'</u>	Total Drilling Rig Time	Total Lbs. Coke Used <u>2200#</u>	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
#1 590	#2 380	#3 370	#4 360	#5 350	#6 340
#7 330	#8 270	#9 230	#10 270		
Anode Output (Amps)					
#1 4.6	#2 5.1	#3 4.5	#4 5.5	#5 4.0	#6 4.3
#7 1.8	#8 1.5	#9 1.9	#10 1.7		
Anode Depth					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Anode Output (Amps)					
#11	#12	#13	#14	#15	#16
#17	#18	#19	#20		
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used	
Volts <u>11.6</u>	Amps <u>19.1</u>	Ohms <u>0.661</u>	<u>36-50'</u>		

Remarks: Water at 180' when hole was bugged. Used 420' of
1" vent pipe with 200' of perforations.

All Construction Completed

Cody Munkres
(Signature)

GROUND BED LAYOUT SKETCH

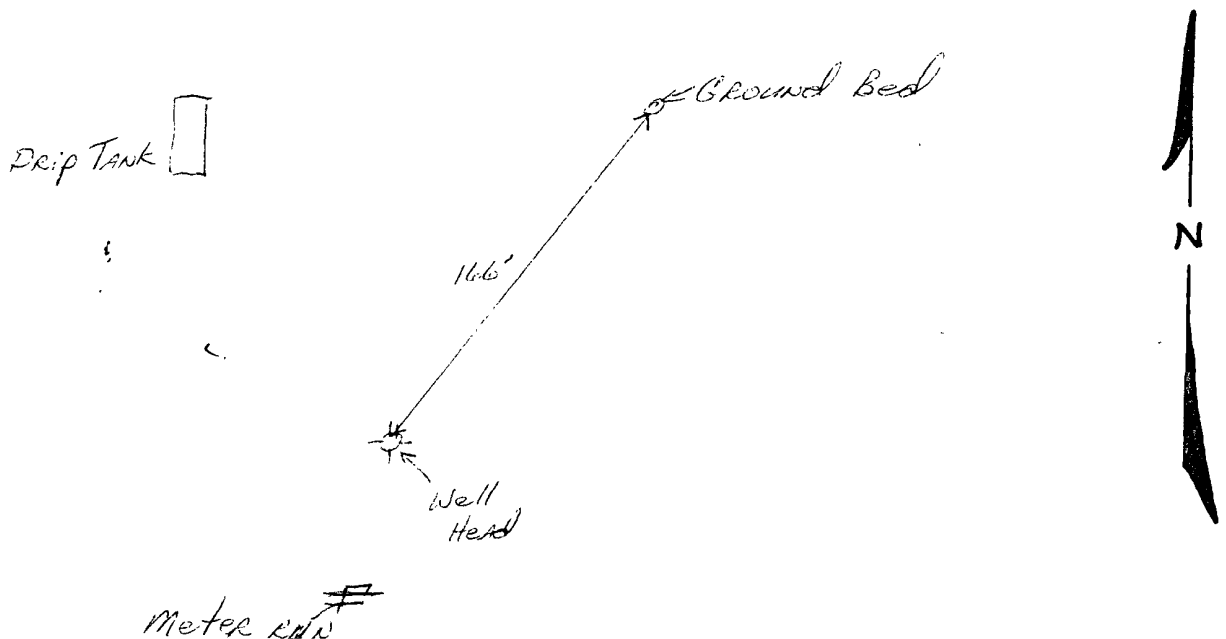

COMPANY Union Texas Petroleum DAILY DRILLING REPORT December 28, 1986

WELL NUMBER:

SECTION:

TOWNSHIP:

RANGE:

WATER AT

A #2-E
FEET

HOLE MADE:

h
0

12

60-180-

FEET	HOLE MADE:
	420

DESCRIPTION OF FORMATION

REMARKS: *Water Volume at approx. 10 gallons per minute.*

Driller

Tool Dresser