

30-039-07809

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NE Sec. 20 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #30

178w(retired)

Elevation N/A Completion Date 9/4/64 Total Depth 380' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. N/A

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

OIL CON. DIV
DIST. 3

Type & amount of coke breeze used: 5250 lbs.

Depths anodes placed: 360', 354', 348', 300', 294', 205', 155', 149'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: gb #2 RETIRED

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 9-4-64


Well Name <u>SAN JUAN 30-6 No. 30</u>				CPS No. <u>178 K1</u>			
Location <u>NE 20-30-6</u>				Work Order No. <u>184-40448-50-20</u>			
Anode Hole Depth <u>380</u>		Total Drilling Rig Time <u>2.8 1/2</u>		Type & Size Bit Used <u>6 1/4, 6060 = 120-18585 = 75</u>		No. Sacks Mud Used <u>0</u>	
No. Sacks Lost Circulation Mat'l Used <u>0</u>		Anode Depth					
		# 1 <u>360</u>	# 2 <u>354</u>	# 3 <u>348</u>	# 4 <u>300</u>	# 5 <u>294</u>	# 6 <u>205</u>
Total Lbs. Coke Used <u>35 sks 5250</u>		Anode Output (Volts)					
		# 1 <u>2.0</u>	# 2 <u>2.3</u>	# 3 <u>2.1</u>	# 4 <u>2.0</u>	# 5 <u>1.8</u>	# 6 <u>1.9</u>
Total Circuit Resistance				No. Ft. Surface Cable			
Volts <u>11.6</u>		Amps <u>7.3</u>		Ohms <u>1.59</u>		<u>211</u>	

Drilling Log (Attach Hereto). ☐

Remarks: 5 Anodes = 12.0 V 5.0 A
6 Anodes = 11.8 V 5.8 A
7 Anodes = 11.6 V 6.8 A = 1.7

All Construction Completed

[Signature]
(Signature)

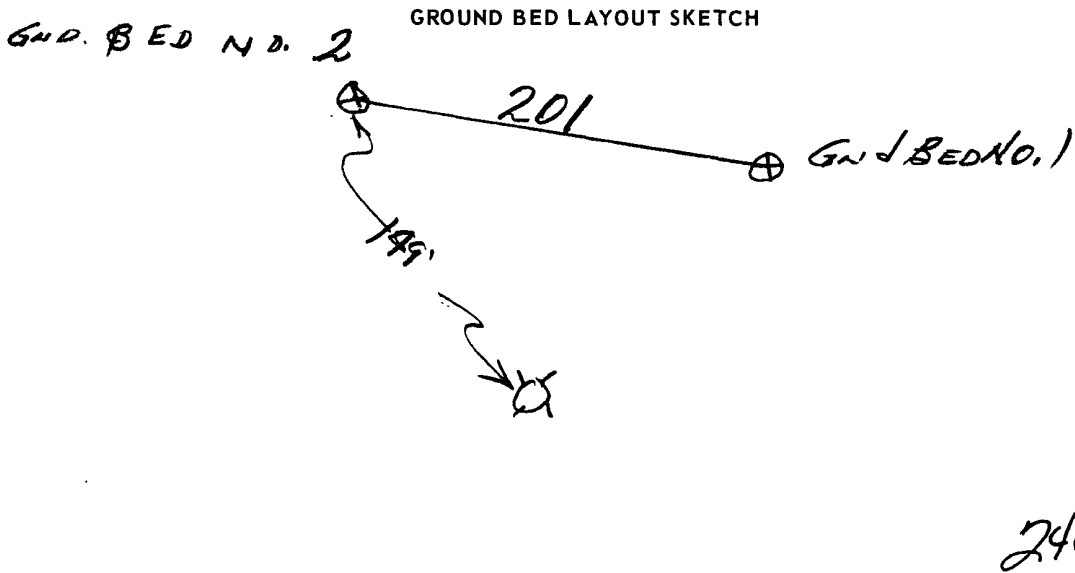

O Rect.

DAILY DRILLING REPORT

[illegible]