

25 - 30-039-07164

84 - 30-039-07157

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit SW Sec. 3 Twp 27 Rng 5

Name of Well/Wells or Pipeline Serviced SAN JUAN 27-5 UNIT #25, #84

cps 737w

Elevation 6575' Completion Date 4/15/66 Total Depth 180' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. WET AT 40' & 160'

Depths gas encountered: N/A


Type & amount of coke breeze used: 3250 lbs.

Depths anodes placed: 135', 129', 123', 117', 111', 105', 99', 93', 70'

Depths vent pipes placed: 135' OF 3/4" PLASTIC HOSE

Vent pipe perforations: BOTTOM 60'

Remarks: qb #1

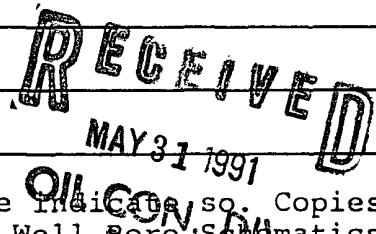

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Date 4-15-66

Well Name <u>SJU 27-5# 25 & 27-5# 84</u>			CPS No. <u>737W</u>		
Location <u>SW# 3-27-5</u>			Work Order No. <u>184-53204-54279-50</u>		
Anode Hole Depth <u>180</u>	Total Drilling Rig Time <u>13 Hrs</u>	Type & Size Bit Used <u>7 7/8-45 407 = 180</u>	No. Sacks Mud Used <u>2</u>		
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth				
	# 1 <u>135</u>	# 2 <u>129</u>	# 3 <u>123</u>	# 4 <u>117</u>	# 5 <u>111</u>
Total Lbs. Coke Used <u>3250</u>	Anode Output (Volts)				
	# 1 <u>4.5</u>	# 2 <u>5.5</u>	# 3 <u>5.5</u>	# 4 <u>5.4</u>	# 5 <u>5.6</u>
Total Circuit Resistance	No. Ft. Surface Cable Conduct				
Volts <u>11.2</u>	Amps <u>12.2</u>	Ohms <u>0.91</u>	<u>1257-014 H. W. Odes</u>		
			7 <u>99</u>	8 <u>93</u>	9 <u>70</u>
			7 <u>6.0</u>	8 <u>5.3</u>	9 <u>4.2</u>
			NO NO		

Drilling Log (Attach Hereto). ☐


Remarks: Static 600' SW # 84 = .78 600' SE # 25 = .75
3/4" Plastic Hose to No. 1 Anode - Bottom 60' Perforated
10 lb. Chemical
Good All Rectifier 30-20-3 NEG. Ser. # 65C6652

1150'
1252'
2402' - TOTAL #8 WIRE USED.

All Construction Completed

(Signature)

GROUND BED LAYOUT SKETCH

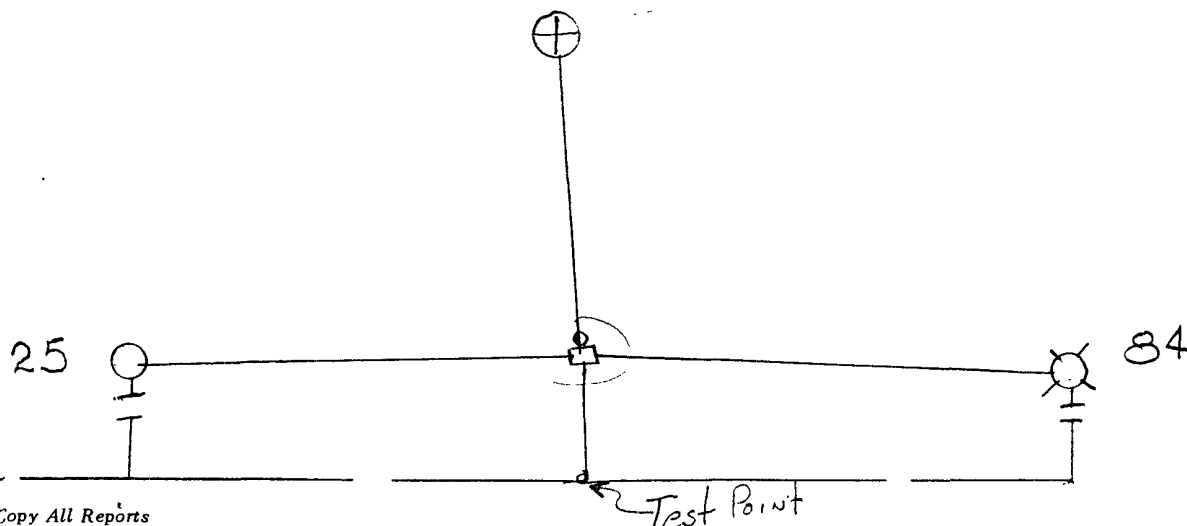

DAILY DRILLING REPORT

Rev. 1-61)
WJm
7-40

WELL NO.

CONTRACTOR

W. E. Alden

RIGHTS

REPORT NO.

DATE _____

4-18-1965

MORNING

DAYLIGHT

EVENING

NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.	NO. DC	SIZE	LENG.
BIT NO.	NO. DC	SIZE	LENG.	BIT NO.	NO. DC	SIZE	LENG.	BIT NO.
SERIAL NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.	STANDS	SERIAL NO.
SIZE	SINGLES	SIZE	SINGLES	SIZE	SINGLES	SIZE	SINGLES	SIZE
TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE	DOWN ON KELLY	TYPE
MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE	TOTAL DEPTH	MAKE

[illegible][illegible]

REMARKS -

REMARKS -

REMARKS -

REMARKS -	REMARKS -	REMARKS -
4-14-66 -	Left Port for 1250 moved to new loc. drilled meter 12 1/4 hole reported to ground level	
4-15-66 -	drilled 40' with 4 1/2" drilled 180' with 7" with 1 1/2" at 510' hole casing without	
	left and set 600 around aug 730 then down hole 730 log hole casing without	
	in ground up 4 1/2" down 1 1/2" at 130	

SIGNED: Toolpusher

Company Supervisor

for sale