

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS IN  
NORTHWEST NEW MEXICO

OPERATOR: Williams Production Company LOCATION: P 16 32 11 LEASE NUMBER: E-3092

NAME OF WELL/WELLS OR PIPELINE SERVICED: COX CANYON UNIT #006A MV - 30-045-22095  
DUALWELL COX CANYON #16 30-045-21582

ELEVATION: 6548' GR COMPLETION DATE: 02/29/76 TOTAL DEPTH: 375 ft. LAND TYPE: STA

CASING: 7-5/8" 26.4# K-55 Set @ N/A ft. Casing is not cemented.

CEMENT PLUG---Top:N/A' Bottom:N/A' Used 0 sx. Class "B" (1.18 cu.ft./sk).

WATER DEPTH: 80 ' Water zone thickness not available. WATER DESCRIPTION: Fresh


DEPTH OF GAS: N/A '.

COKE: 9315 lbs. of Metallurgical coke breeze used.

NUMBER & TYPE OF ANODES: 10CD TOP ANODE @ 30 ft. BOTTOM ANODE @ 370 ft.

VENT PIPE: 1" PVC Set @ 375 ft. Vent pipe perforated from 60 ft. to 375 ft.

REMARKS: \_\_\_\_\_

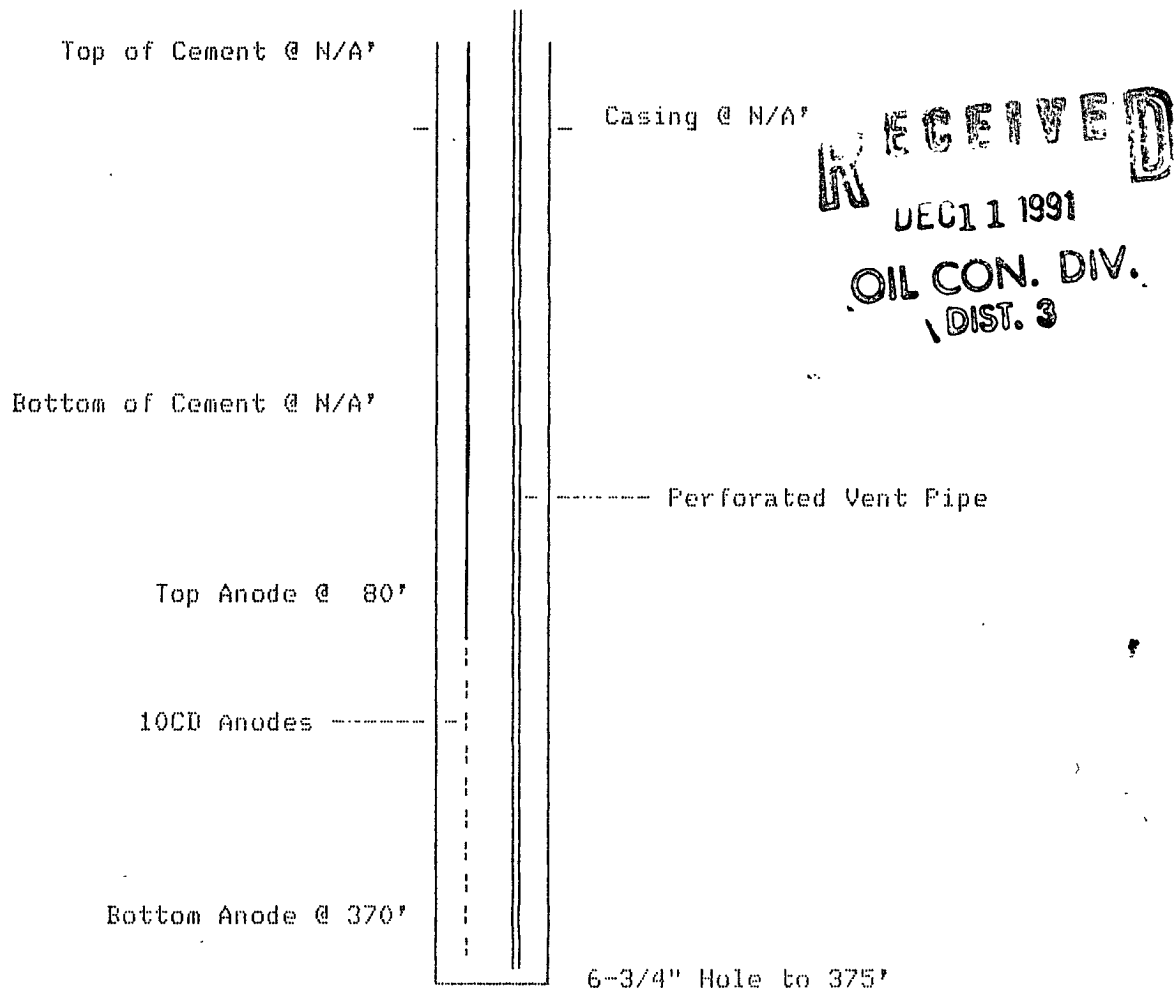

#12



GENERAL  
CORROSION  
SERVICES

SHEET NO. 2JOB NO. 68102-1DATE: 2-29-77SURVEY: COX CANYON #16BY: BT

|    | TEST LOCATION |     |         |     |         |     |         |
|----|---------------|-----|---------|-----|---------|-----|---------|
|    |               | 50  | 5.6     | 200 | 10.0    | 350 | 5.2     |
| 1  | 370           |     | 9.5     |     | 11.0    |     | 3.5     |
| 2  | 360           |     | 14.0    |     | 13.0    |     | 3.6 (2) |
| 3  | 270           |     | 17.0    |     | 14.0    |     | 3.6     |
| 4  | 275           |     | 17.0    |     | 20.0    |     | 3.0 (2) |
| 5  | 265           | 75  | 14.0    | 225 | 26.0    | 375 | 3.0 TP  |
| 6  | 255           |     | 4.9 (2) |     | 4.8     |     |         |
| 7  | 245           |     | 6.0     |     | 3.2 (2) |     |         |
| 8  | 235           |     | 5.6     |     | 3.9     |     |         |
| 9  | 175           |     | 5.6     |     | 3.9 (2) |     |         |
| 10 | 80            | 100 | 8.1     | 230 | 3.5     | 400 |         |
|    |               |     | 14.0    |     | 3.5 (2) |     |         |
|    |               |     | 19.0    |     | 3.4     |     |         |
|    |               |     | 26.0    |     | 3.9 (3) |     |         |
|    |               |     | 18.0    |     | 3.9     |     |         |
|    |               | 125 | 32.0    | 275 | 4.3     | (4) |         |
|    |               |     | 40.0    |     | 5.0     |     |         |
|    |               |     | 44.0    |     | 6.0     |     |         |
|    |               |     | 43.0    |     | 4.8 (3) |     |         |
|    |               |     | 30.0    |     | 5.4     |     |         |
|    |               | 150 | 8.7     | 300 | 5.8     |     |         |
|    |               |     | 9.0     |     | 8.8     |     |         |
|    |               |     | 10.0    |     | 11.0    |     |         |
|    |               |     | 10.0    |     | 6.9     |     |         |
|    |               |     | 6.7     |     | 6.4     |     |         |
|    |               | 175 | 5.1 (2) | 325 | 6.7     |     |         |
|    |               |     | 6.1     |     | 7.9     |     |         |
|    |               |     | 6.7     |     | 10.0    |     |         |
|    |               |     | 6.6     |     | 22.0    |     |         |
|    |               | 195 | 9.0     | 345 | 13.0    |     |         |

NOTES:

Water at 80'0.44 - 52 CR4800 # COKE