

44 - 30-039-07837
440 - 30-039-24243

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit N Sec. 15 Twp 30 Rng 6

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #44, #440

cps 220w

Elevation 6302' Completion Date 12/8/88 Total Depth 460' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 280'

RECEIVED

MAY 31 1991

Depths gas encountered: N/A

**OIL CON
DIST.**

Type & amount of coke breeze used: N/A

Depths anodes placed: 435', 428', 400', 393', 386', 365', 358', 350', 315', 305'

Depths vent pipes placed: 455' OF 1" PVC VENT PIPE

Vent pipe perforations: 200'

Remarks: gb #3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp 12-12-88

Drilling Log (Attach Hereto) ☐

Completion Date 12/8/88

CPS #	Well Name, Line or Plant	Work Order #	Station	Ins. Union Check
221 W	S.J. 30-6 *440'	3167A		☐ Good ☒ Bad 1-3"
	S.J. 30-6 *44	69766		
Location	Anode Size	Anode Type	Size Bit	
N-15-30-6	2" X 60"	DUFION	0 3/4"	
Depth Drilled	Depth Logged	Drilling Log Time	Total Lbs. Coke Used	Lost Circulation Mat. Used
460'	455'			
Anode Depth				
= 1 435	= 2 428	= 3 400	= 4 393	= 5 386
Anode Output (Amps)				
= 1 2.0	= 2 2.3	= 3 2.6	= 4 3.1	= 5 2.4
Anode Depth				
= 11	= 12	= 13	= 14	= 15
Anode Output (Amps)				
= 11	= 12	= 13	= 14	= 15
Total Circuit Resistance			No. 8 C.P. Cable Used	No. 2 C.P. Cable Used
Volts 12.03	Amps 10.2	Ohms 1.2		

Remarks: WATER AT 280', COULD NOT BLOW ENOUGH OUT FOR WATER SAMPLE.
INSTALLED 455' of 1" P.V.C. VERT PIPE, PERFORATED 200'.

meter 455 30332
gall 275-3-13-00960-9


G.B. 4074.00
Rectifier Size: 40 V 16 A 669.00
Add'l Depth: 0
Depth Credit: -45' 350 -157.50 ✓
Extra Cable: 440' .24 105.60 ✓
Batch & 1 Cable: 290' .70 203.00 ✓

All Construction Completed

25' Meter Pole: 0
20' Meter Pole: 0
10' Stub Pole: 0
Junction Box: 1 225.00

B 5119.10 ✓
TAX 255.96 ✓
TOTAL B 5375.06 OK 92

JE Stille
(Signature)

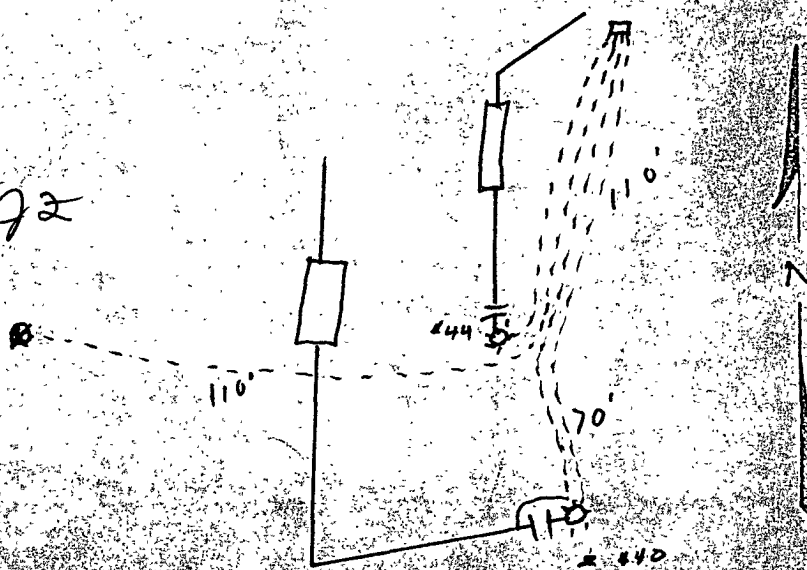

DRILLING CO.

Drill No.

12-10

DRILLER'S WELL LOG

S. P. No.

S-T 30-6

Date

440

Client

Prospect

County

State

If hole is a redrill or if moved from original staked position show distance and direction moved:

FROM	TO	FORMATION	COLOR	HARDNESS
0	110	Shal	6	Druckton sh
110	130	Druckton		sh
130	230	Shal	6	Druckton sh
230	460	Druckton	6	Shal sh

Mud

Brm

Lime

Rock Bit Number

Make

Remarks:

Water 250'

Driller

Cherry