

32-30-039-07066
179-30-039-07076

CPS 683

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator Union Oil Company of California Location: Unit Sec. 16 Twp 27N Rng 6W

Name of Well/Wells or Pipeline Serviced Rincon Unit 32MV, and Rincon 179DK

Elevation 6,000 Completion Date 12/7/1965 Total Depth 380' Land Type* S

Casing, Sizes, Types & Depths no information

If Casing is cemented, show amounts & types used na

If Cement or Bentonite Plugs have been placed, show depths & amounts used
na

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. na

Depths gas encountered: Not available

Type & amount of coke breeze used: Type unkown - 4050 lbs

Depths anodes placed: 245'

Depths vent pipes placed: 255'

Vent pipe perforations: At each anode form 187' to 245'

Remarks: El Paso Natural Gas Co. was operator at the time this ground bed was
installed. Drilling, Logs & water type unavailable. First groundbed installed.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
MAY 03 1990
OIL CON. DIV.
DIST. 3

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Items

Date 12-7-65

Well Name <u>Rincon #32 & Rincon #179</u>			CPS No. <u>683 W</u>		
Location <u>NE 16-27-6</u>			Work Order No. <u>189-52697</u> <u>54220-50-20</u>		
Anode Hole Depth <u>380</u>	Total Drilling Rig Time <u>27 1/2</u>	Type & Size Bit Used <u>AJ 702 = 150'</u>		No. Sacks Mud Used <u>0</u>	
No. Sacks Lost Circulation Mat'l Used <u>0</u>	Anode Depth <u>7,199</u>	<u>8 193</u>	<u>9 187</u>	<u>9 187</u>	<u>9 187</u>
	#1 <u>245</u>	#2 <u>239</u>	#3 <u>223</u>	#4 <u>217</u>	#5 <u>211</u>
Total Lbs. Coke Used <u>4050</u>	Anode Output (Volts)	<u>8 4.2</u>	<u>9 5.6</u>	<u>9 5.6</u>	<u>9 5.6</u>
	#1 <u>3.5</u>	#2 <u>3.8</u>	#3 <u>3.7</u>	#4 <u>5.2</u>	#5 <u>4.5</u>
Total Circuit Resistance Volts <u>12.3</u>	Amps <u>12.5</u>	Ohms <u>0.98</u>	No. Ft. Surface Cable Conduit <u>316</u>		


Drilling Log (Attach Hereto). ☐

Remarks: R⁹s 600'S #32 = .76 R⁹s 600W #179 = .70

Install 30V 20A Rectifier (2 NEG.) Good All Ser. #6506687


3/4" Hose at Bottom & oppsite each Anode at 245' = 255' Hose
Perforated 4 lbs Chemical to GB

8 Anodes = 1.1 m

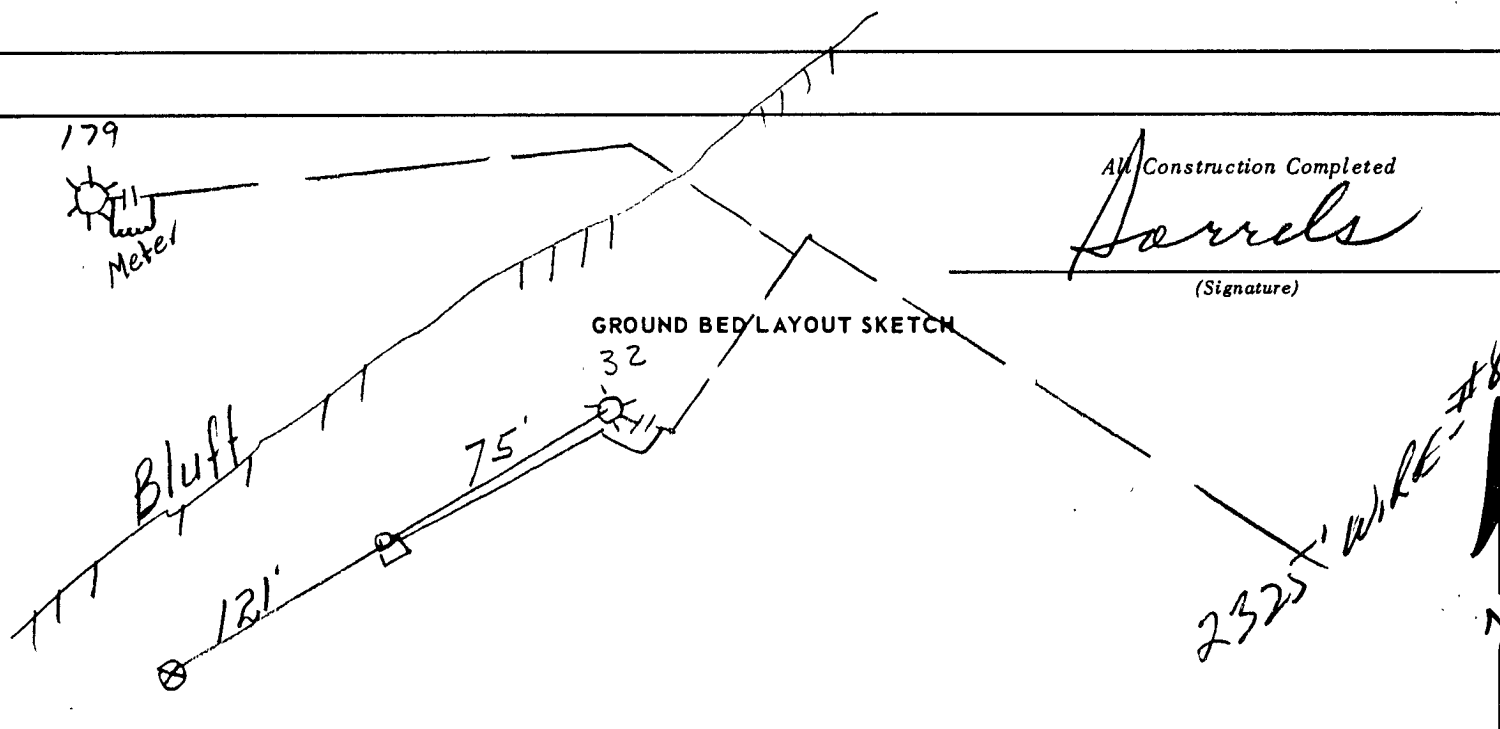

#5 #179

METER BOX
FLO-LINE RETURN

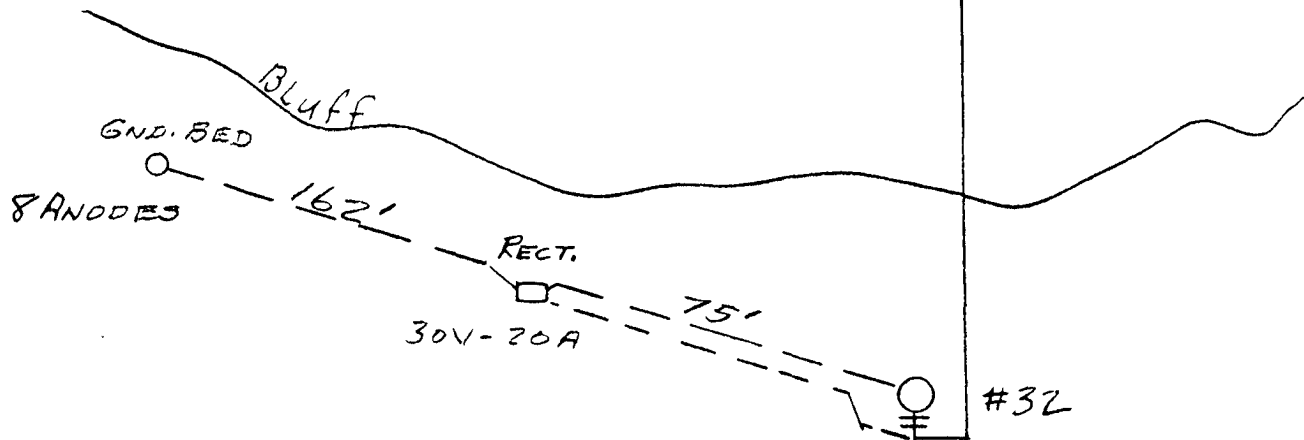

CATHODIC PROTECTION

EL PASO NATURAL GAS COMPANY

RINCON #32 E#179 CPS-683-W

SCALE NONE

DATE 5-20-65 No. 5

DRAWN BY

CHECKED BY

NE16-R7-6