

98-30-039-07733
421 30-039-24221

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit G Sec. 34 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #98, #421

cps286w

Elevation 6313' Completion Date 12/19/88 Total Depth 380' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 45', 190' COULD NOT GET SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 330', 320', 300', 275', 265', 255', 245', 235', 220', 210'

Depths vent pipes placed: 375' of 1" PVC VENT PIPE

Vent pipe perforations: 180'

Remarks: gb #3

RECEIVED

MAY 31 1991

OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto) ☐Completion Date 12/19/88

CPS #	Well Name Line or Plant	Work Order #	State	Ins Union Check
286W	S.J. 30-6 #421 30-6 #98	3117A 69825	69V 600' W	☒ Good ☐ Bad
Location	Anode Size	Anode Type	Size Bit	
G-34-30-7	2" X 60"	PURION	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat. Used
300'	375'			
Anode Depth				
#1 330	#2 320	#3 300	#4 275	#5 265
#6 255	#7 245	#8 235	#9 220	#10 210
Anode Output (Amps)				
#1 2.3	#2 1.9	#3 1.9	#4 2.5	#5 2.7
#6 3.9	#7 3.8	#8 2.3	#9 2.3	#10 2.7
Anode Depth				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Anode Output (Amps)				
#11	#12	#13	#14	#15
#16	#17	#18	#19	#20
Total Circuit Resistance			No. 8 C.P. Cable Used	
Volts	11.6	Amps	12.8	Ohms
				.9

Remarks: WATER AT 45' & 190', COULD NOT GET WATER SAMPLE. INSTALLED 325' of 1" P.V.C. VENT PIPE, PERFORATED 180'.

1005377

555-5304-001-00-9

G.B. 4074.00


Rectifier Size:	40V	16A	669.00
Add'l Depth:			
Depth Credit:	-125	3.50	-437.50 ✓
Extra Cable:	280'	.24	67.20 ✓
Ditch & 1 Cable:	370'	.70	259.00 ✓

All Construction Completed

jc Stott
(Signature)

25' Meter Pole: 0
20' Meter Pole: 0
10' Stub Pole: 0
Junction Box: 1

225.00 ✓
4856.70 ✓
TAX 242.84
TOTAL 5099.54 OK 83

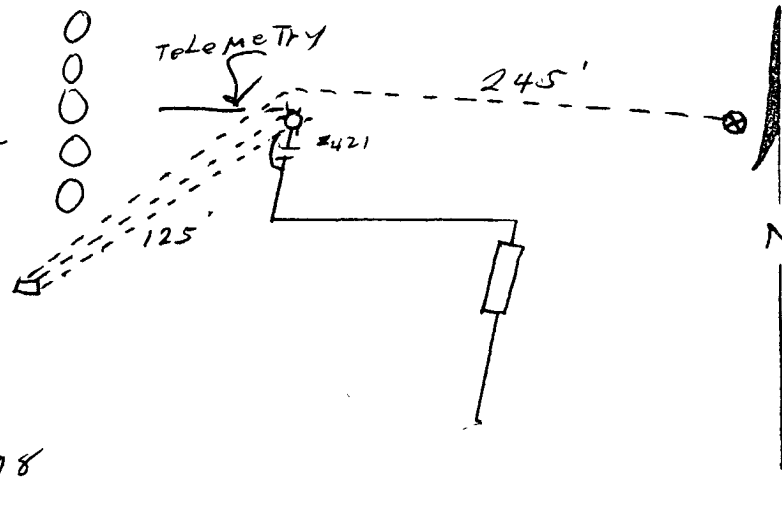

*98
T

DRILLING CO.

Drill No. 10

DRILLER'S WELL LOG

S. P. No. ST 30-1 421 Date _____

Client _____ Prospect _____

County _____ State _____

If hole is a redrill or if moved from original staked position show distance and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	5	Sandy clay
5	20	Sandy loam
20	190	Shale
190	210	Heavy sand
210	310	Shale
310	330	Heavy sand
330	360	Shale

Mud _____ Brn _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Heavy sand 45' 190'
to 316'

Driller Harvey