

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Form approved
Budget Bureau No. 1004-0135
Expires August 31, 1985

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER	174M 30-039-25199 109 30-039-07004	5. LEASE DESIGNATION AND SERIAL NO. SF - 079366
2. NAME OF OPERATOR Union Oil Company of California dba UNOCAL		6. IF INDIAN, ALLOTTEE OR TRIBE NAME N/A
3. ADDRESS OF OPERATOR P.O. Box 850, Bloomfield, New Mexico 87413		7. UNIT AGREEMENT NAME Rincon Unit
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface Rincon Unit 174M - 1775' FNL + 1540' FWL Rincon Unit 109 - 1050' FNL + 840' FWL		8. FARM OR LEASE NAME Rincon Unit
14. PERMIT NO	15. ELEVATIONS (Show whether DF, R, or G) 6520' GR, 6598' DF	9. WELL NO. 174 M, 109
		10. FIELD AND POOL, OR WILDCAT Blanco MV, Basin DK
		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 19, T27N, R6W
		12. COUNTY OR PARISH Rio Arriba
		13. STATE NM

RECEIVED
OCT 22 1992
OIL CON. DIV.
DIST. 3

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other) Install Cathodic Protection

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.) *

Proposed installation of Cathodic Protection to well casing:

PROCEDURE: Drill a 6' diameter hole, 300' deep within the existing well location boundary. Ten Dur-Iron anodes will be installed below the uppermost water bearing formation in favorable locations. This will be backfilled with coke breeze (99.5% carbon) to completely surround the anodes. A 50' plug of bentonite will be installed on top of the coke breeze.

A DC rectifier will be installed on existing well location and a buried DC positive cable will be connected to the anode from the rectifier. Negative DC cables from the rectifier will also be buried and connected to well casings to be protected. These cables will be buried 18" to 24" deep (on previously disturbed ground) in existing roads and locations. See attached map.

UNOCAL's completion expectation is July 1, 1993.

ACCEPTED FOR RECORD
FARMINGTON RESOURCE AREA

OCT 14 1992

FARMINGTON, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

Donald E. Luthium

TITLE (Temp.) Production Tech

DATE 9/21/92

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:


TITLE

DATE

*See Instructions on Reverse Side

NMOCD

ON UNIT

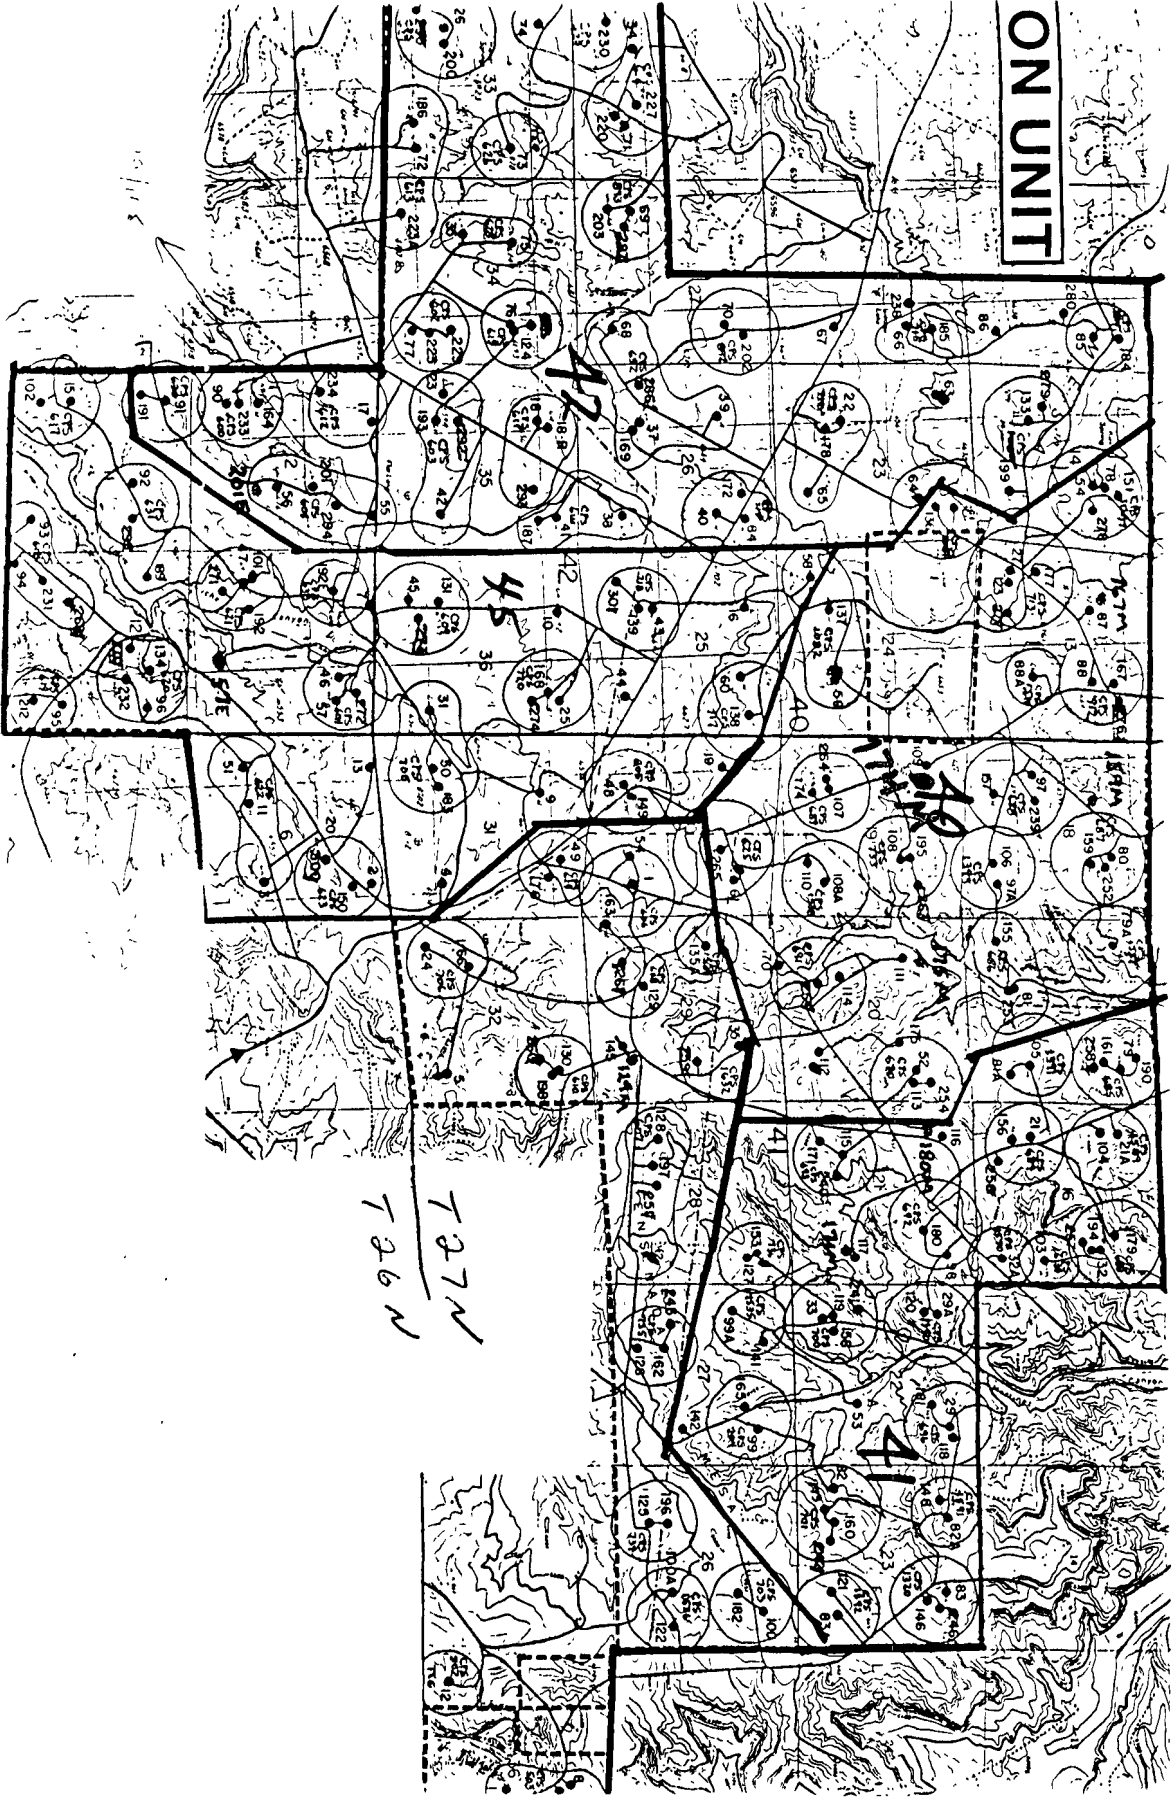

R 7 W
R 6 W

T 27 N
T 26 N