

2-30-045-06598

4-30-045-20338

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

6-30-045-06678

7-30-045-13037

Operator UNOCAL Location: Unit Sec. 7 Twp 27 Rng 8

Name of Well/Wells or Pipeline Serviced Day "B" 2, 4, 6, & 7

Elevation 6789' Completion Date 2/27/91 Total Depth 300' Land Type* F

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
 N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. Moisture only

Depths gas encountered: N/A

Type & amount of coke breeze used: Carbo-40, 99.9% Carbon=2466 lbs.

Depths anodes placed: 150', 160', 170', 180', 190', 200'

Depths vent pipes placed: 0 to 300' deep

Vent pipe perforations: Laser cut slots from 100' to 300' deep

Remarks: First Ground Bed Installed at this Location

RECEIVED

MAR 19 1991

OIL CON. DIV.

0137.0

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

Unocal

A LUKENS COMPANY

CIS 1: 751 00054 WELL NAME: Day 2B "PM" LOCATION: 7-27-8 DATE: 2-21-91

TOTAL VOLTS: 12.3 TOTAL AMPS: 5.1 OHM RESISTANCE: 2.41

												ANODE READINGS			
DEEP	100 ANODE	ANODE NO.	DEEP	100 ANODE	ANODE NO.	DEEP	100 ANODE	ANODE NO.	DEEP	100 ANODE	ANODE NO.	NO.	DEPTH	NO COKE	WITH COKE
5			185	4.1	2	365			545			1	195	11.6	5.1
10			190	4.5		370			550						
15			195	4.6	1	375			555						
20			200	3.4		380			560						
25			205	3.4		385			565						
30			210	3.5		390			570						
35			215	2.8		395			575						
40			220	2.7		400			580						
45			225	2.6		405			585						
50			230	2.2		410			590						
55			235	2.2		415			595						
60			240	2.2		420			600						
65			245	3.0		425			605						
70			250	2.3		430			610						
75			255	2.0		435			615						
80			260	2.9		440			620						
85			265	2.2		445			625						
90			270	1.9		450			630						
95			275	2.8		455			635						
100			280	2.0		460			640						
105			285	1.9		465			645						
110			290	2.0		470			650						
115			295	2.1		475			655						
120			300	1.4		480			660						
125			305			485			665						
130			310			490			670						
135	4.6		315			495			675						
140	4.5		320			500			680						
145	4.8		325			505			685						
150	4.9	6	330			510			690						
155	5.0	5	335			515			695						
160	4.8	51	340			520			700						
165	4.9	d	345			525			705						
170	4.8	7a	350			530			710						
175	4.5		355			535			715						
180	4.7	3	360			540			720						

REMARKS: 300' - Dia 6" 200 Alluent - No 2-27-91 have a bridge about 100'

CPS

MO-TE DRILLING, INC.

DAY Wednesday

DRILLER JACK LEFT TOWN 7:00 ARRIVED FIELD 8:00

HELPER	Jason	LEFT FIELD 8:00 ARRIVED TOWN 7:00
--------	-------	-----------------------------------

HELPER	Donald	TOTAL FOOTAGE TODAY
--------	--------	---------------------

RIG NO. 203 DATE 2-27-71 CLIENT CP

BEGIN WORK ON HOLE NO. Day 2-B "H" AT _____ FEET


BEGIN WORK ON HOLE NO. _____ AT _____ FEET

[illegible]

BIT RECORD		
SIZE & MAKE	SERIAL NO.	FOOTAGE
1-5ct	6" Blades	
CIRCULATION MATERIAL		
QUAN.	UNIT	MATERIAL


NO. OF LOADS OF WATER _____ SOURCE _____

N →

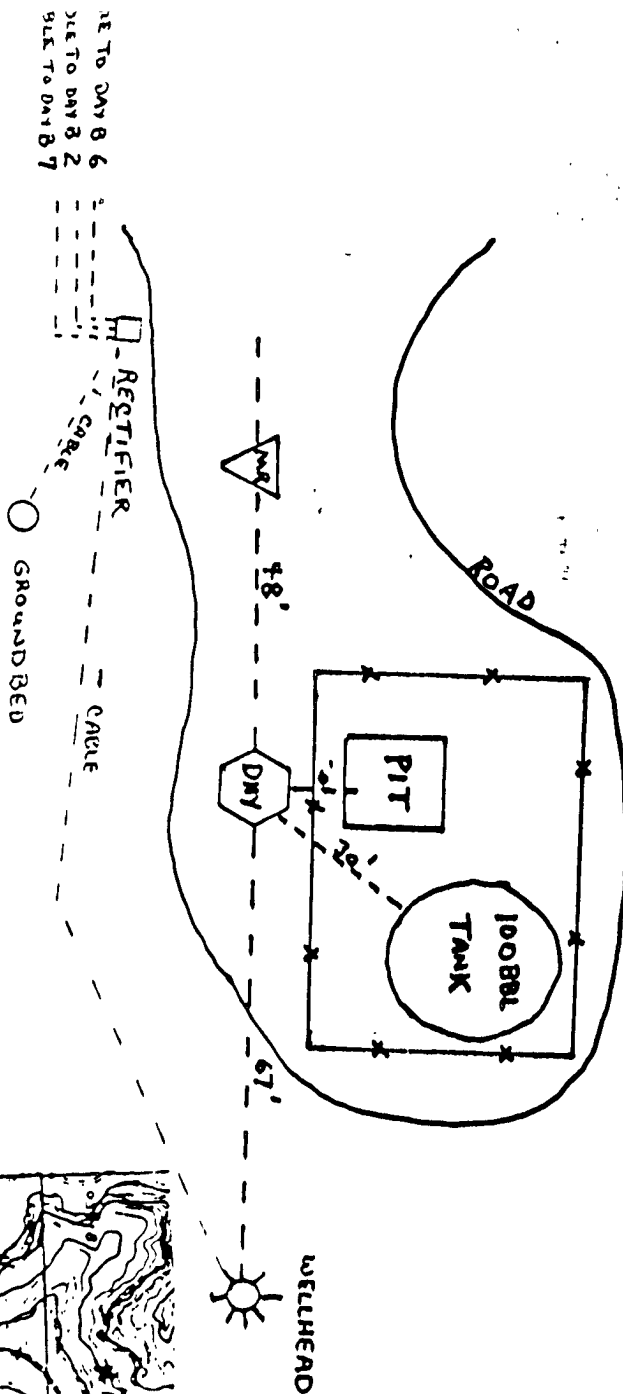

NE TO DAY 8 6
SW TO DAY 8 2
SUT TO DAY 8 7

- BURIED DC CABLE IN ROAD
- LOCATION OF RECTIFIER

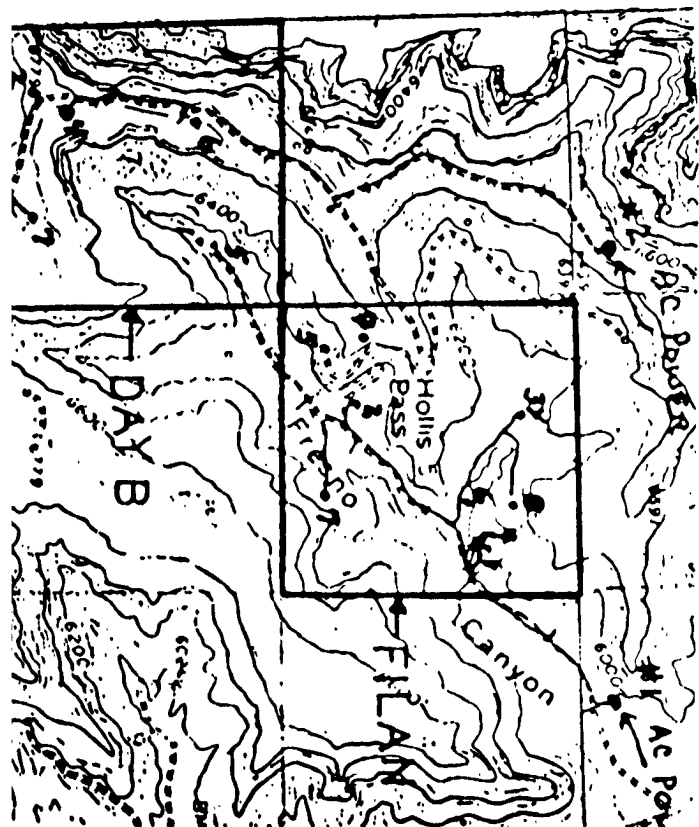

DAY B 4 DK
NE/SW SEC 7 T27N R8W NMP
METER No. 75942
SF-078571

UNOCAL