

1367

E

30-089-22651

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Location: Unit NW Sec. 11 Twp 30 Rng 7

Name of Well/Wells or Pipeline Serviced SAN JUAN 30-6 UNIT #84A

cps 1692w

Elevation 6221' Completion Date 11/2/82 Total Depth 500' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 90'

Depths gas encountered: N/A

Type & amount of coke breeze used: 5000 lbs.

Depths anodes placed: 446', 440', 432', 426', 420', 375', 356', 350', 336', 330'

Depths vent pipes placed: 500'

Vent pipe perforations: 420'

Remarks: gb #1

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Drilling Log (Attach Hereto). ☐

Completion Date 11-2-82

CPS #		Well Name, Line or Plant		Work Order # -		Static -		Ins Union Check	
1692-W		SJ 30-6# 84-A		59107-21-50-20-64		.87		☒ Good ☐ Bad	
Location		Anode Size		Anode Type		Size Bit			
NW-11-307		2" x 60"		Duriron		6 3/4" Mill Tooth			
Depth Drilled		Depth Logged		Drilling Rig Time		Total Lbs Goke Used		Lost Circulation Mat'l Used	
500'		496'				APPROX. 5000 LBS			
Anode Depth									
# 1 446	# 2 440	# 3 432	# 4 426	# 5 420	# 6 375	# 7 356	# 8 350	# 9 336	# 10 320
Anode Output (Amps)									
# 1 2.50	# 2 3.09	# 3 2.96	# 4 2.90	# 5 2.60	# 6 1.85	# 7 1.90	# 8 2.36	# 9 2.36	# 10 2.83
Anode Depth									
# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)									
# 11	# 12	# 13	# 14	# 15	# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance				No. 8 C.P. Cable Used		No. 2 C.P. Cable Used			
Volts 12.60		Amps 9.10		Ohms 1.4					


Remarks: ST. C/S 600' East = .87 DP. 1080 MA. casing + UNION = GOOD
DRILLER said water at 90' water 15 min. blowed wet cuttings. water
next AM. 70' caught water sample - spilled. Logged 296' drilled 500
installed 500' OF vent pipe 220' OF Perforations. 11-1-82 Relogged
Hole with #1 anode, short in log anode.

Rectifier Size: 40 V 16 A
Addn'l Depth NONE
Depth Credit: [REDACTED] 4'
Extra Cable: [REDACTED] 185'
Ditch & 1 Cable: [REDACTED] 190
25' Meter Pole: NO
20' Meter Pole: NO
10' Stub Pole: YES

All Construction Completed

Don J. Hitt
(Signature)

GROUND BED LAYOUT SKETCH

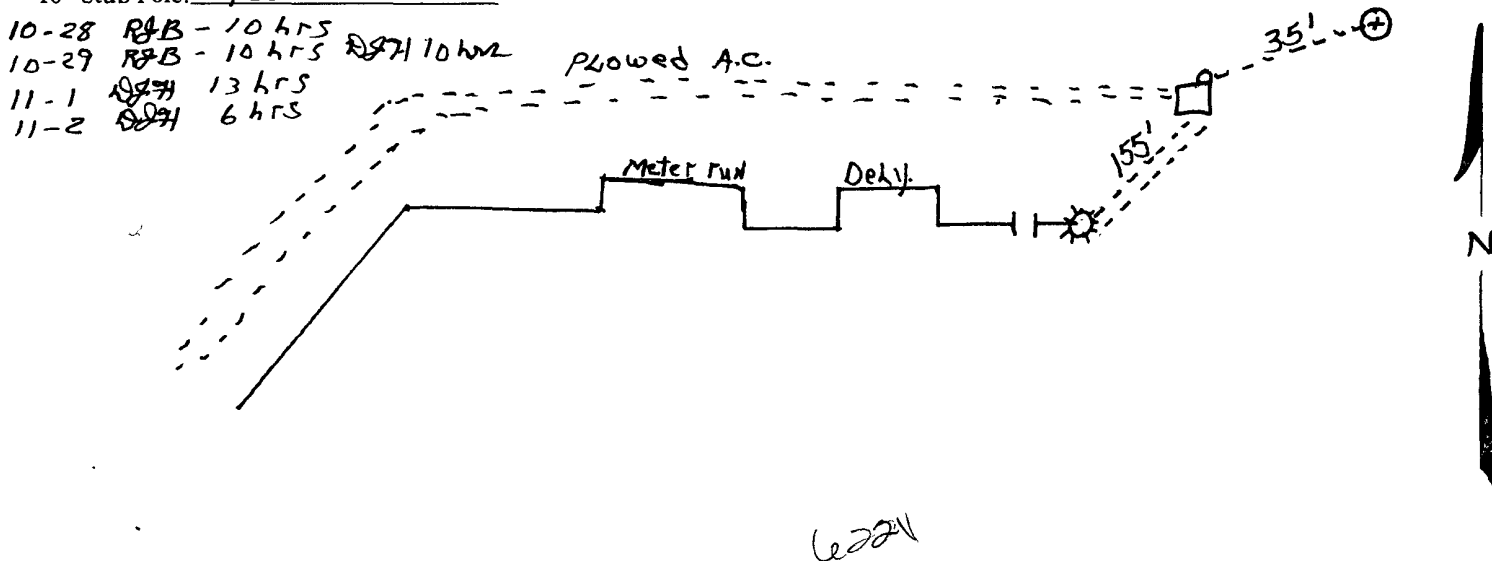

DAILY DRILLING REPORT

[illegible]

SIGNED: Toolpusher

Brian Burege

____ Company Supervisor

1692-W

S.J. 30-6 #84-A NW-11-30-7 59107-21-50-20-64
ST C/S 600 East = .87 ~~1080~~ ma casing + u non = Good

Thurs 10
Fri 10.8
MON 13:
Tues 6:

Page ~~10-28~~ 1
Date 10-28
By ~~SN~~ + RRB

Page 1

80	80	1.0	80	1.2	DRILLER SAID WATER AT
		1.1		1.3	1.0 90' WATERED 15 MIN. BLANKED
90	90	1.1	90	5	WET CUTTINGS
		1.3		1.2	CHARGED RECT + JUCT. BOH
100	300	.7	500	BOH	WATER NEXT AM 70'
		1.0			CAUGHT SAMPLE - SPILLED
10	10	1.3	1		LOGED 496' OF HOLE
		1.3			INSTALLED 500' OF VENT PIPE
20	20	1.1	1		420' OF PERFORATIONS
		1.0			
30	30	1.3	1		
		1.3			
40	40	1.8	1		
		1.2			
50	50	1.7	1		
		1.9			
60	60	.8			
		1.1			
70	70	.60	.5		
		.60	1.4		
80	80	.20	.8		
		.30	.9		
90	90	1.3	.3		
		.70	.6		
200	1.1	400	.5		
	.6	.4			
10	.3	10	.9		
	1.0	.3			
20	.9	20	1.6		
	1.5	2.0			
30	.9	30	1.5		
	.7	1.5			
40	.9	40	2.2		
	.8	1.4	.4		
50	.7	50	1.7		
	.9	1.5			
60	.8	60	.8		
	.8	1.4			
70	.8	70	.7		
	.9	1.3			

Note: See Page #2

1-475-
2-465-
3-455-
4-445-
5-435-
6-420-
7-375-
8-355-
9-345-
10-335-

Page # 2

[illegible]