

40- 30-039-06907

84- 30-039-06928

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator Union Oil Company of Claifornia Location: Unit Sec. 26 Twp 27N Rng 7W

Name of Well/Wells or Pipeline Serviced Rincon #40 PC Rincon #84 MV

Elevation 6745' Completion Date 10/27/65 Total Depth 300' Land Type* F

Casing, Sizes, Types & Depths None

If Casing is cemented, show amounts & types used None

RECEIVED
MAY 14 1990
OIL CON. DIV. I
DIST. 3

If Cement or Bentonite Plugs have been placed, show depths & amounts used

None

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. NA

Depths gas encountered: NA

Type & amount of coke breeze used: Type unknown 4104 lbs

Depths anodes placed: 194' to 277'

Depths vent pipes placed: 200'

Vent pipe perforations: NA

Remarks: El Paso Natural Gas Co. was the operator at the time this ground bed was installed.

First ground bed installed on this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG


#36

Date 10-27-65

Well Name <u>RINCON #40 & #84 & #172</u>		CPS No. <u>719 W</u>	
Location <u>NE 26-27-7</u>		Work Order No. <u>184 32603 50-20</u>	
Anode Hole Depth <u>300'</u>	Total Drilling Rig Time <u>17 1/2 Hrs</u>	Type & Size Bit Used <u>7 7/8 Rock 48731 J</u>	No. Sacks Mud Used <u>1</u>
No. Sacks Lost Circulation Mat'l Used	Anode Depth #1 <u>212</u> #2 <u>277</u>	#3 <u>206</u> #4 <u>264</u>	#5 <u>224</u> #6 <u>218</u>
Total Lbs. Coke Used <u>4104 lbs</u>	Anode Output (Volts) #1 <u>3.8</u> #2 <u>4.2</u>	#3 <u>5.4</u> #4 <u>4.4</u>	#5 <u>4.5</u> #6 <u>5.0</u>
Total Circuit Resistance Volts <u>12</u> Amps <u>10.9</u> Ohms <u>1.10</u>	No. Ft. Surface Cable Conduit <u>2389' #8 Stranded</u>		

Drilling Log (Attach Hereto). ☐

Remarks: STATICS RINCON #40 600' S = .63 RINCON #172 (600'S) = .6
" #84 600' N = .68
Installed 45 V 30 A 4 Neg Terminal Good All Rect.
SERIAL # 6526637
2450' #8 Stranded in END Bed.
200' 1/2" Plastic Hose

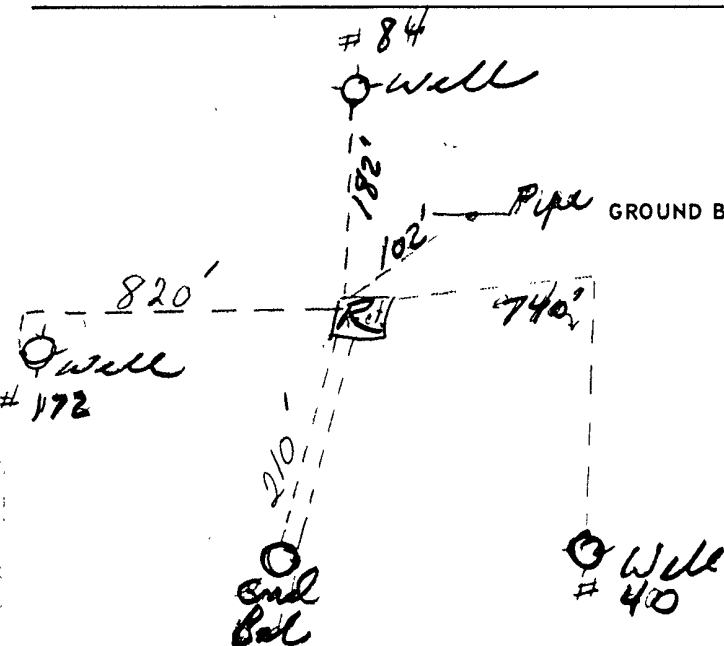

All Construction Completed

Ernest Phillips
(Signature)

GROUND BED LAYOUT SKETCH

4812' #8 WIRE
13.7 LB/FT. COKE

LEASE

WELL NO.

CONTRACTOR

RIG NO.

REPORT NO.

DATE

MORNING

DAYLIGHT

EVENING

Driller					Total Men In Crew					Driller					Total Men In Crew					Driller					Total Men In Crew				
FROM	TO	FORMATION	WT-BIT	R.P.M.						FROM	TO	FORMATION	WT-BIT	R.P.M.						FROM	TO	FORMATION	WT-BIT	R.P.M.					
0	38	Sandstone								250	300	Sandstone & shale																	
38	105	Shale																											
105	170	Sandstone																											
170	250	Shale																											

Driller					Total Men In Crew					Driller					Total Men In Crew					Driller					Total Men In Crew				
BIT NO.	NO. DC	SIZE	LENG.							BIT NO.	NO. DC	SIZE	LENG.							BIT NO.	NO. DC	SIZE	LENG.						
SERIAL NO. 487312										SERIAL NO.										SERIAL NO.									
SIZE 2 7/8										SIZE										SIZE									
TYPE Retip										TYPE										TYPE									
MAKE										MAKE										MAKE									

MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED			MUD RECORD			MUD, ADDITIVES USED AND RECEIVED		
Time	Wt.	Vis.				Time	Wt.	Vis.				Time	Wt.	Vis.			

FROM	TO	TIME BREAKDOWN	FROM	TO	TIME BREAKDOWN	FROM	TO	TIME BREAKDOWN

REMARKS -	REMARKS -	REMARKS -
10-25-65 left last loc. at 2:30 Drilled pole hole and Drilled to 40ft left Rig at 5:00		
10-26-65 left yard at 6:00 arrived at Rig 7:45 Drilled from 40ft to 280ft left Rig at 5:00		
10-27-65 left yard at 6:00 arrived at Rig 7:45 Drilled from 280ft to 300ft washed out hole finished at 12:00		

SIGNED: Toolpusher

Company Supervisor

Ernest Phelps