

1535

E

30-045-26030

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit E Sec. 15 Twp 30 Rng 13

Name of Well/Wells or Pipeline Serviced MC CORD #1E

cps 6559w

Elevation N/A Completion Date 12/22/86 Total Depth 360' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 120' & 270'

Depths gas encountered: N/A

Type & amount of coke breeze used: 1800 lbs.

Depths anodes placed: 345', 330', 320', 300', 290', 280', 270', 260', 250', 240'

Depths vent pipes placed: N/A

Vent pipe perforations: N/A

Remarks: (gb #1)

RECEIVED
MAY 31 1991
OIL CON. DIV.
DIST. 3

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

BURGE CORROSION SYSTEMS, INC.

P.O. BOX 1359 - PHONE 334-6141
AZTEC, NEW MEXICO 87410

Drilling Log (Attach Hereto). ☐

6559W

Completion Date 12-22-86


Well Name <i>McCord #1E</i>		Location <i>Union Texas Petroleum</i>		E 15-30-13	
Type & Size Bit Used				Work Order No. <i>133</i>	
Anode Hole Depth <i>360'</i>	Total Drilling Rig Time	Total Lbs. Coke Used <i>1800</i>	Lost Circulation Mat'l Used	No. Sacks Mud Used	
Anode Depth					
#1 <i>345</i>	#2 <i>330</i>	#3 <i>320</i>	#4 <i>300</i>	#5 <i>290</i>	#6 <i>280</i>
#7 <i>270</i>	#8 <i>260</i>	#9 <i>250</i>	#10 <i>240</i>		
Anode Output (Amps)					
#1 <i>3.87</i>	#2 <i>3.24</i>	#3 <i>3.56</i>	#4 <i>4.07</i>	#5 <i>4.18</i>	#6 <i>4.32</i>
#7 <i>4.41</i>	#8 <i>4.36</i>	#9 <i>4.01</i>	#10 <i>3.92</i>		
Anode Depth					
#11	#12	#13	#14	#15	#16
Anode Output (Amps)					
#11	#12	#13	#14	#15	#16
Total Circuit Resistance			No. 8 C.P. Cable Used		No. 2 C.P. Cable Used
Volts <i>12.4</i>	Amps <i>18.6</i>	Ohms <i>0.67</i>	<i>2985 feet</i>		

Remarks: *Negative and Positive 267 feet.*

All Construction Completed

Johnny Smith
(Signature)

GROUND BED LAYOUT SKETCH

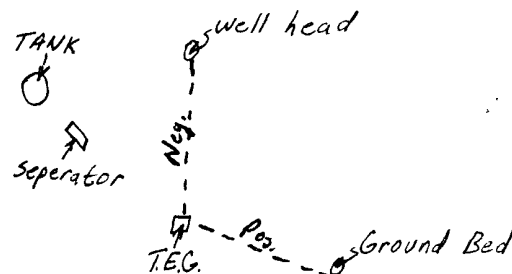

Aztec, New Mexico

COMPANY David Texas Petroleum DAILY DRILLING REPORT December 22 1986

WELL NAME:

WELL NUMBER:

SECTION:

TOWNSHIP:

RANGE:

WATER AT

FEET

HOLE MADE:

44

120-1 270-1

070

DESCRIPTION OF FORMATION

[illegible]

REMARKS:

REMARKS: Water was coming in hole at approx 10 o'clock
per minute from both sides combined.

Driller

Carol M. Winkler

Tool Dresser