

1533

30-045-21763

E

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit P Sec. 25 Twp 31 Rng 9

Name of Well/Wells or Pipeline Serviced SEYMOUR #1A

cps 6607w

Elevation 6509' Completion Date 11/3/86 Total Depth 500' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used

N/A

Depths & thickness of water zones with description of water when possible:

Fresh, Clear, Salty, Sulphur, Etc. 40' & 125'

Depths gas encountered: N/A


Type & amount of coke breeze used: 4200 lbs.

Depths anodes placed: 470', 450', 390', 380', 320', 310', 270', 250', 240', 160'

Depths vent pipes placed: 480'

Vent pipe perforations: 350'

Remarks: gb #1

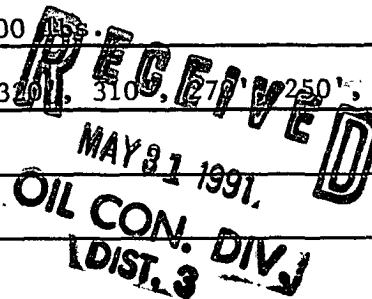

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.



Burge Corrosion Systems

P.O. Drawer G
Aztec, New Mexico 87410

DD No 30302A
Meter # 4391

Drilling Log (Attach Hereto). ☒

Completion Date: November 3, 19


Well Name Seymour #1-A		Location Union Texas Petroleum		Wellbore ID W657W	
Type & Size Bit Used 6 3/4 inch				Work Order No.	
Anode Hole Depth 500 feet		Total Drilling Rig Time 7 hours		Total Lbs. Coke Used 4200 #	
Anode Depth		Total Drilling Rig Time		Lost Circulation Mat'l Used	
500 feet		7 hours			
Anode Output (Amps)		Total Drilling Rig Time		Lost Circulation Mat'l Used	
1.9		7 hours			
Anode Depth		Total Drilling Rig Time		Lost Circulation Mat'l Used	
500 feet		7 hours			
Anode Output (Amps)		Total Drilling Rig Time		Lost Circulation Mat'l Used	
1.9		7 hours			
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used	
Volts 11.9		Amps 12.6		Ohms 0.94	
Hx		3540 feet			

Remarks: Hit water at 40 feet and at 125 feet when hole was drilled and water was standing in the hole at 120 feet when the hole was logged. Used 480 feet of vent pipe with 350 feet of perforations.

All Construction Completed

Cody Mumbres
(Signature)

GROUND BED LAYOUT SKETCH

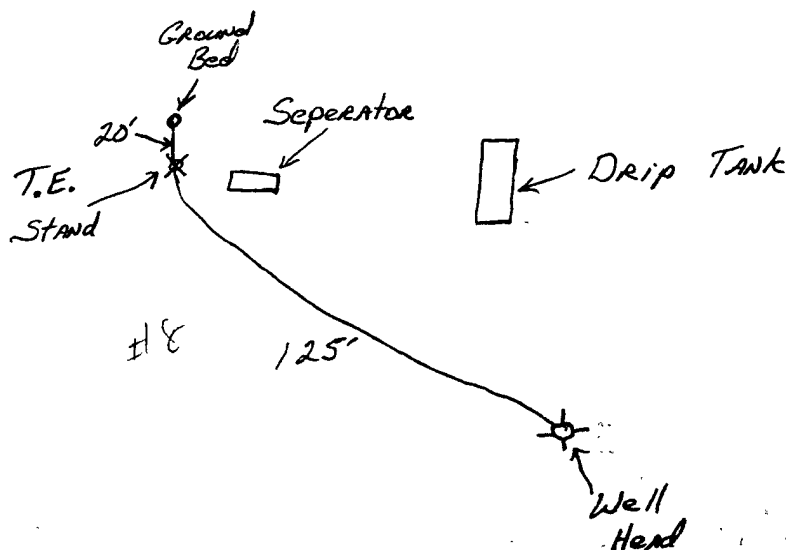

COMPANY UNION, TEXAS **ROLEUM** **DAILY DRILLING REPORT** November 1 1986

WATER AT	FEET	HOLE MADE:
40 Feet and 125 Feet		500 Feet

DESCRIPTION OF FORMATION

[illegible]

REMARKS: Had enough water at 125 feet that injection was required
to drill.

Brian E. Burge

Driller

Tool Dresser