

1990

30-039-24700

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator UNOCAL Location: Unit Sec. 30 Twp 27 Rng 6

Name of Well/Wells or Pipeline Serviced Rincon Unit No. 265

Elevation 6590' Completion Date 9/12/90 Total Depth 300' Land Type* F

Casing, Sizes, Types & Depths NONE

If Casing is cemented, show amounts & types used NONE

If Cement or Bentonite Plugs have been placed, show depths & amounts used
NONE

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 105' deep, damp=5' thick, fresh

Depths gas encountered: NONE

Type & amount of coke breeze used: 300' deep with carbo-60=99.9 carbon coke breeze

Depths anodes placed: 150', 160', 170', 180', 190', 200'

Depths vent pipes placed: 0 to 300' deep

Vent pipe perforations: Laser cut slots from 100' to 300' deep

Remarks: 1st ground bed installed at this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED
JAN 30 1991
OIL CON. DIV
(DIST. 3)

DATA SHEET NO. 1061

COMPANY Unocal JOB No. 751-00084 DATE: 9-12-90
 WELL: Rincon Unit No 265 PIPELINE: _____
 LOCATION: SEC. 30 TWP. 27 RGE. 6 CO. Rio Arriba STATE NM
 ELEV. _____ FT: ROTARY 300 FT: CABLE TOOL _____ FT: CASING Carbo 40 ^{COKE}
 GROUND BED: DEPTH 300' FT. DIA. 6" IN. GAS _____ LBS. ANODES 6-1/2 ST 1.6/50

DEPTH FT.	DRILLER'S LOG	EXPLORING ANODE TO STRUCTURE			NO COKE	WITH COKE	ANODE NO.	DEPTH, TOP OF ANODES
		E	I	R	I	I		
0-20'	Red Shale & Sandstone							
20-40'	Red Shale & Grey							
40-100'	Grey Shale w/ sandstone							
	First water 195' Deep							
100	Grey Sandstone		2.6					
5			2.7					
10	Grey & Dark Grey Shale		2.6					
5			2.5					
20			2.5					
5			2.5					
30			2.7					
5			2.4					
40			2.5					
5			2.4					
50			2.6					6
5			2.2					
60			3.0					5
5			2.8					
70			2.9			7.7		4
5			2.5					
80			2.6					3
5			2.4					
90			2.6					2
5			2.4					
200			2.6					1
5			2.5					
10			2.6					
5			2.8					
20	Grey Sandstone		2.5					
5			2.1					
30			2.0					
5			1.8					
40			1.8					
5			1.5					
50			1.4					
5			1.1					
60			1.1					
5			.8					
70			.8					
5			.6					
80			.7					
5			.6					
90			.5					
5			.7					
300	T & D 13							

GROUND BED RESISTANCE: (1) VOLTS 12.67 - AMPS 7.7 - 1.65 OHMS

(2) VIBROGROUND _____ OHMS

GENERAL CATHODIC PROTECTION SERVICES CO.

A LUKENS COMPANY

MO-TE DRILLING, INC.

DAY Wednesday


DRILLER	B. R.	LEFT TOWN	6:00	ARRIVED FIELD	7:30
HELPER	James	LEFT FIELD		ARRIVED TOWN	
HELPER	J. J.	TOTAL FOOTAGE TODAY			
RIG NO.	0110	DATE	9-12-90	CLIENT	Uno-Pal
BEGIN WORK ON HOLE NO.	Bayou #265	AT		FEET	
BEGIN WORK ON HOLE NO.		AT		FEET	

[illegible]

BIT RECORD		
SIZE & MAKE	SERIAL NO.	FOOTAGE
1 6" 11" VPC		
CIRCULATION MATERIAL		
QUAN.	UNIT	MATERIAL

NO. OF LOADS OF WATER _____ SOURCE _____

san juan repr farm,nm Form 219-6

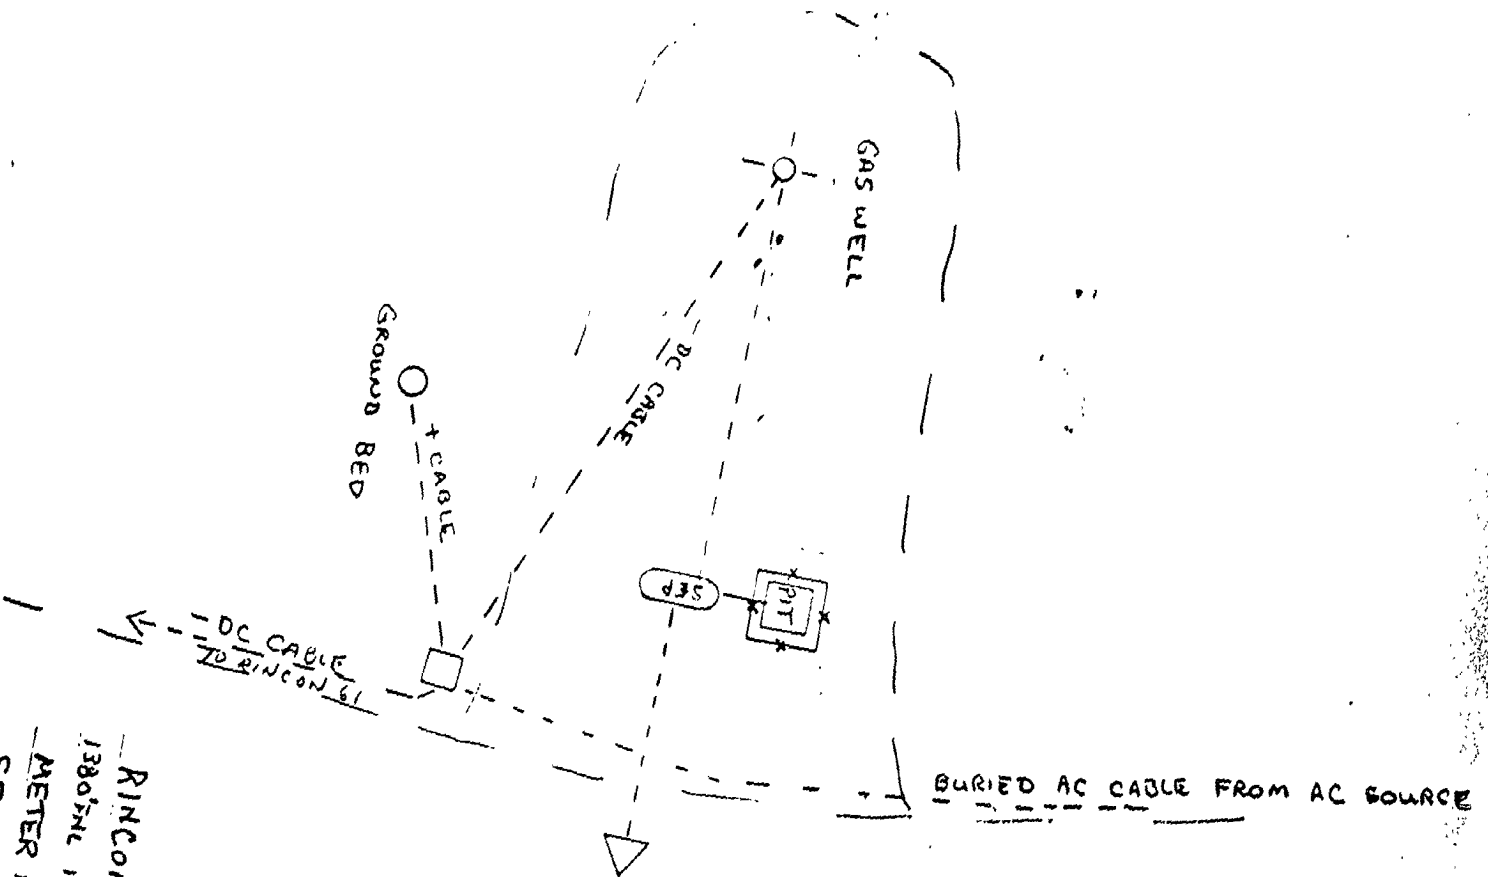

RINCON UNIT 265
1380HNL 1812FEL SEC 30 T27NR6W
FC
METER NO. 92644
SF-079364