

11-30-039-06648
51-30-039-06683
DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

34 30-039-06667

Operator UNOCAL Location: Unit Sec. 6 Twp 26 Rng 6

Name of Well/Wells or Pipeline Serviced Rincon Unit No. 11 DK, 51 PC & 3 PC

Elevation 6547' Completion Date 7-25-90 Total Depth 300' Land Type* F

Casing, Sizes, Types & Depths NONE

If Casing is cemented, show amounts & types used NONE

If Cement or Bentonite Plugs have been placed, show depths & amounts used
NONE

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 110' depth, less than 5' thick, fresh.

Depths gas encountered: NONE

Type & amount of coke breeze used: 300 FT. deep with carbo 60=99.9% Carbon Coke Breeze, 200 lbs.

Depths anodes placed: 150', 160', 170', 180', 190', 200'

Depths vent pipes placed: 300 FT.

Vent pipe perforations: From 120 FT. to 300 FT, laser slotted PVC pipe

Remarks: First ground bed installed at this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.



RECEIVED
JAN 30 1991
OIL CON. DIV.

COMPANY Unocal JOB No. 751-00084 DATE: 7-25-90
 WELL: Lincon Unit No 11 PIPELINE: _____
 LOCATION: SEC. 6 TWP. 26 RGE. 6 CO. Lin Arriba STATE NM
 ELEV. _____ FT: ROTARY 300 FT: CABLE TOOL _____ FT: CASING Care to 60
 GROUNDED: DEPTH 300 FT. DIA. 6" N. GAS 2000 LBS. ANODES Lida-6 ea ST 16/1

DEPTH, FT.	DRILLER'S LOG	EXPLORING ANODE TO STRUCTURE			NO COKE	WITH COKE	ANODE NO.	DEPTH, TOP OF ANODES
		E	I	R				
40 to 100	0-15' Sand + Clay, 15-40' Shale Red + Brown							
100	First water 110' Damp							
5	Grey Shale + Sandstone							
10								
15								
20	All vent pipe, Red + Grey Shale							
25								
30								
35								
40	Hard Sandy Grey Shale							
45								
50								
55								
60								
65								
70								
75								
80								
85	Grey Sandstone							
90								
95								
100								
105								
110								
115								
120								
125								
130								
135								
140								
145								
150								
155								
160								
165								
170								
175								
180								
185								
190								
195								
200								
205								
210								
215								
220	Hard Grey Shale + some Sandstone							
225								
230								
235								
240								
245								
250								
255								
260								
265								
270								
275								
280								
285								
290								
295								
300	T + D							
305								

GROUNDED RESISTANCE: (1) VOLTS 13.25 - AMPS 8.0 - 1656 OHMS

(2) VIBROGROUND _____ OHMS

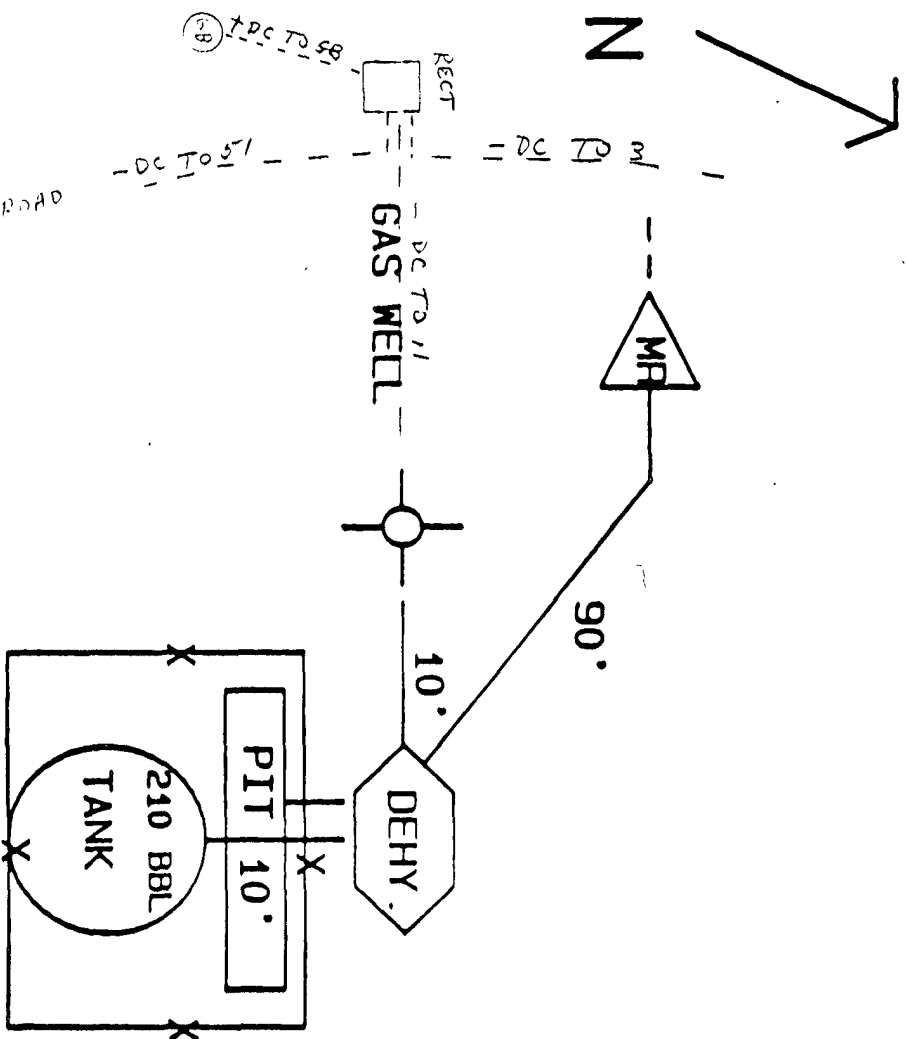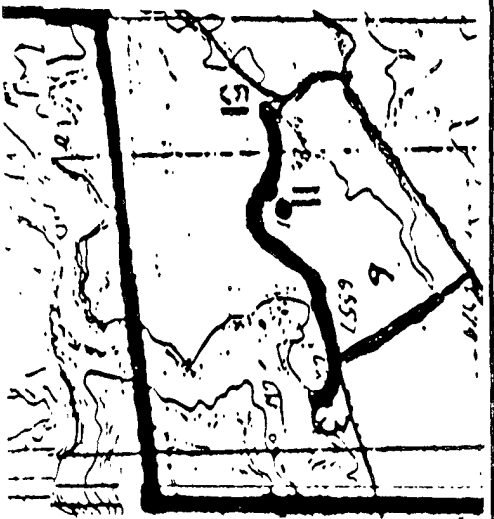

REMARKS

RINCON UNIT # 11 DK
NE/SW SEC 6 T26NR6W NMPM
METER NO. 75252
SF-079301A

SCALE: NONE

UNOCAL

BURIED DC CABLE
IN MIDDLE OF
ROAD
RECTIFIER, GROUND
BED, & METER
POLE LOCATION