

192-30-039-20497
101-30-039-06693

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS
NORTHWESTERN NEW MEXICO

(Submit 3 copies to OCD Aztec Office)

47-30-039-06672

Operator UNOCAL Location: Unit Sec. 1 Twp 26 Rng 7

Name of Well/Wells or Pipeline Serviced Rincon Unit No. 192 DK, 101 MV, 47 PC,
& 271 FC.

Elevation 6466' Completion Date 7-30-90 Total Depth 300' Land Type* F

Casing, Sizes, Types & Depths NONE

If Casing is cemented, show amounts & types used NONE

If Cement or Bentonite Plugs have been placed, show depths & amounts used
NONE

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 140 FT. deep, 5' thick, fresh water.

Depths gas encountered: NONE

Type & amount of coke breeze used: 300' deep with carbo 60=99.9% carbon, Coke Breeze
1500 lbs.

Depths anodes placed: 245', 255', 265', 275', 285', 295'

Depths vent pipes placed: 0' to 300'

Vent pipe perforations: Laser cut slots from 140' to 300' deep

Remarks: 1st ground bed installed at this location.

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

RECEIVED

JAN 30 1991

OIL CON. DIV.
DIST. 3

DATA SHEET NO. 1061

COMPANY Unocal JOB NO. 751-00084 DATE: 7-30-90
 WELL: Rincon Unit #192 PIPELINE: _____
 LOCATION: SEC. 1 TWP. 26 RGE. 7 CO. Rio Arriba STATE NM
 ELEV. 6466'6" FT: ROTARY 300 FT: CABLE TOOL _____ FT: CASING Carbo 60 ft.
 GROUND BED: DEPTH 300 FT. DIA. 6" IN. GAS 1500 LBS. ANODES Lid & 6ea. STL 6/50

DEPTH, FT.	DRILLER'S LOG	EXPLORING ANODE TO STRUCTURE			NO COKE	WITH COKE	ANODE NO.	DEPTH, TOP OF ANODES
		E	I	R				
0-15	Brown Sand,							
15 to 100	First water 140" Damp (Dark) Brown Sandstone w/ hard Gravel Stone .2							
5								
10								
15								
20								
25								
30								
35								
140	All vent pipe							
45								
50								
55								
60								
65								
70								
75								
80								
85								
190	Sandstone, grey							
95								
200								
5								
210	Shale, grey to Dark grey							
15								
20								
25								
30								
235								
40								
245								
50								
255								
60								
265								
70								
275								
80								
285								
90								
295								
300								
5								

GROUND BED RESISTANCE: (1) VOLTS 12.64 - AMPS 7.3 - 1.73 OHMS

(2) VIBROGROUND _____ OHMS

GENERAL CATHODIC PROTECTION SERVICES CO.

A LUKENS COMPANY

MO-TE DRILLING, INC.

DAY Monday

DRILLER <u>C. L. H.</u>		LEFT TOWN	ARRIVED FIELD
HELPER <u>D. Davis</u>		LEFT FIELD	ARRIVED TOWN
HELPER		TOTAL FOOTAGE TODAY	

RIG NO. 206 DATE 9-30-92 CLIENT Umo-Cul

BEGIN WORK ON HOLE NO. Benton 102 AT _____ FEET


BEGIN WORK ON HOLE NO. _____ AT _____ FEET

TIME		ACTIVITY
FROM	TO	
0	15	Brown sand
15	120	down to dark brown sand to with some hard gravel looking stone.
120	210	S. stone, grey
210	300	Shale, grey to dark grey.

BIT RECORD		
SIZE & MAKE	SERIAL NO.	FOOTAGE
1 5/8	new special	

CIRCULATION MATERIAL		
QUAN.	UNIT	MATERIAL

NO. OF LOADS OF WATER _____ SOURCE _____

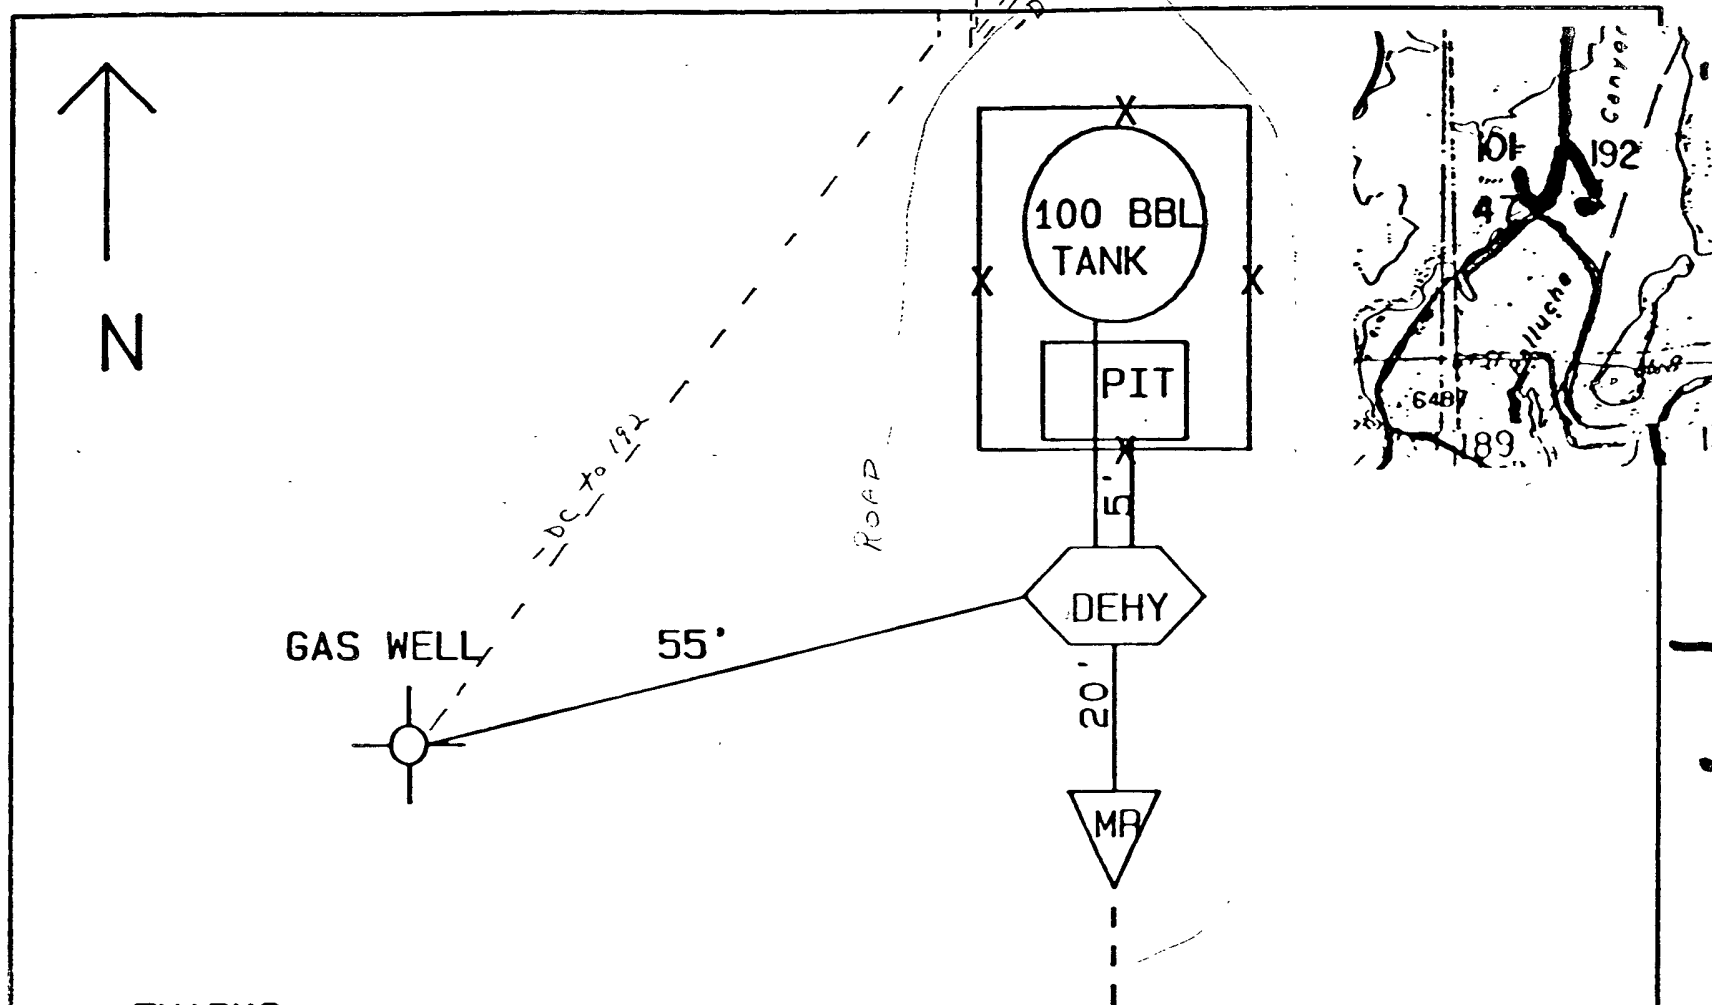

REMARKS

	RINCON UNIT #192 DK
	NE/SW SEC 1 T26NR7W NMPM
	METER NO. 87419
DATE: 05/25/89	SF-079160
SCALE: NONE	UNOCAL