

A #7 30-045-21110

A #2R 30-045-27528

COM #205 30-045-27005

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS.
NORTHWESTERN NEW MEXICO
(Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL INC. Location: Unit G Sec. 10 Twp 30 Rng 10

Name of Well/Wells or Pipeline Serviced SUNRAY A #7, #2R, COM #205

cps 2074w

Elevation 6484' Completion Date 1/13/89 Total Depth 400' Land Type* N/A

Casing, Sizes, Types & Depths N/A

If Casing is cemented, show amounts & types used N/A

If Cement or Bentonite Plugs have been placed, show depths & amounts used
N/A

Depths & thickness of water zones with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc. 60' NO SAMPLE

Depths gas encountered: N/A

Type & amount of coke breeze used: N/A

Depths anodes placed: 385', 375', 340', 330', 320', 310', 300', 290', 95', 85'

Depths vent pipes placed: 405'

Vent pipe perforations: 360'

Remarks: gb #1

RECEIVED
MAY 31 1991

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

*Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee.
If Federal or Indian, add Lease Number.

WELL CASING
CATHODIC PROTECTION CONSTRUCTION REPORT
DAILY LOG

Comp-17-

Drilling Log (Attach Hereto) ☒

Completion Date 1-13-89

CPS #	Well Name, Line or Plant:	Work Order #	Static:	Ins. Union Check
2074-w 30423	SUNRAY A com #205 SUNRAY A #7 #2R	3276A	Low w = .93	☒ Good ☐ Bad
Location:	Anode Size:	Anode Type:	Size Bit:	
G10-30-10	2" x 60"	Duriron	6 3/4"	
Depth Drilled	Depth Logged	Drilling Rig Time	Total Lbs. Coke Used	Lost Circulation Mat'l Used
400'	400'			
Anode Depth				
# 1 385'	# 2 375'	# 3 340'	# 4 330'	# 5 320'
# 6 310'	# 7 300'	# 8 290'	# 9 95'	# 10 85'
Anode Output (Amps)				
# 1 3.3	# 2 3.2	# 3 3.1	# 4 4.3	# 5 3.5
# 6 2.8	# 7 3.0	# 8 3.0	# 9 4.5	# 10 4.6
Anode Depth				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Anode Output (Amps)				
# 11	# 12	# 13	# 14	# 15
# 16	# 17	# 18	# 19	# 20
Total Circuit Resistance		No. 8 C.P. Cable Used		No. 2 C.P. Cable Used
Volts 11.7	Amps 18.9	Ohms .619		

Remarks: DRILLED 400'; LOGGED 400'; DRILLER SAID WATER AT 60', NO SAMPLE. INSTALLED 405' of 1" PVC VENT PIPE, perforated BOTTOM 360'. SET 8 ANODES when hole BRIDGED AT 120' WAS ABLE TO SET #9 & #10 ABOVE BRIDGE

*CAN PLOW AC DOWN EXISTING R.O.W. EST. 1500'

Rectifier Size: 40 V 16 A

Addn'l Depth

Depth Credit: 100' 3.50

Extra Cable: 270' 24

Ditch & 1 Cable: 60' 70

25' Meter Pole:

20' Meter Pole:

10' Stub Pole: 1


Junction Box: 1

All Construction Completed

M. S. Williams
(Signature)

GROUND BED LAYOUT SKETCH

WELL IS NOT TIED IN YET

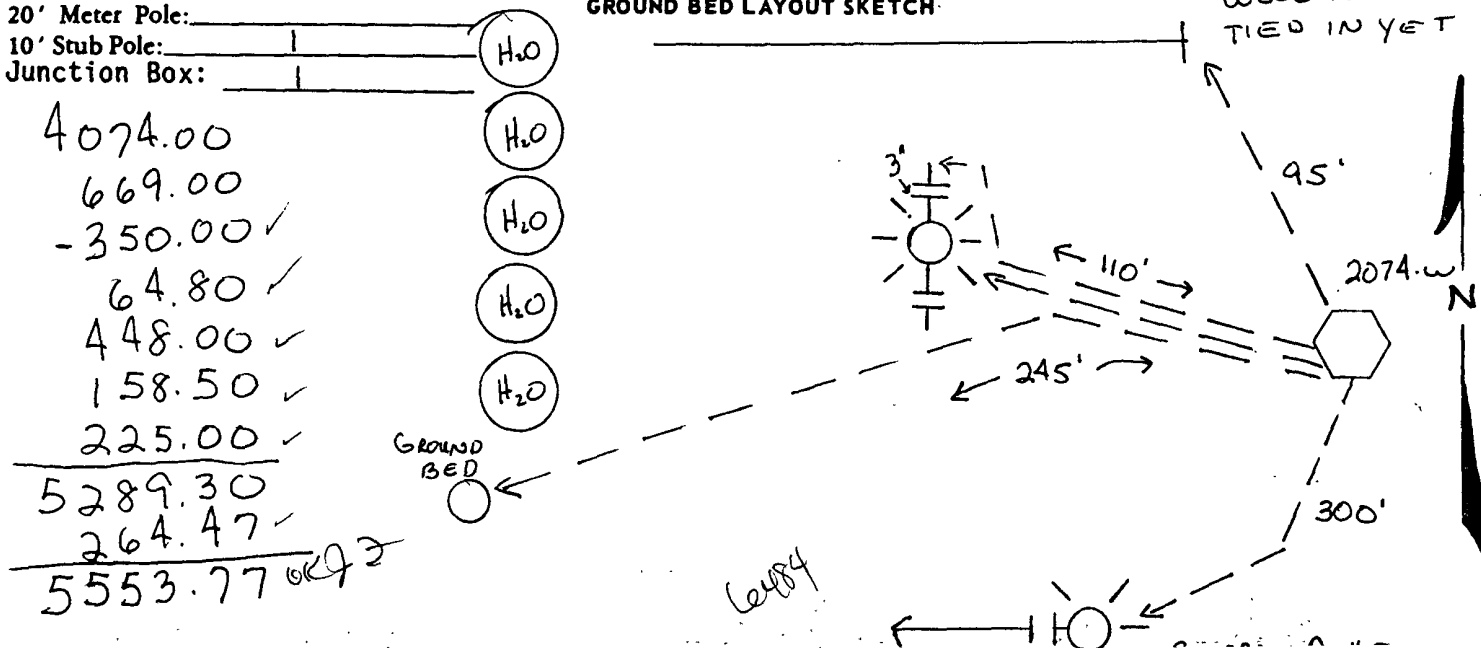

D. CRASS DRILLING CO.

Drill No. 3

DRILLER'S WELL LOG

S. P. No. SUNRAY A Com #205 Date 1-13-89
Client Meridian Oil Co. Prospect _____
County SAN JUAN State New Mex.

If hole is a redrill or if moved from original staked position show distance
and direction moved: _____

FROM	TO	FORMATION — COLOR — HARDNESS
0	10	Fill
10	50	SANDSTONE
50	60	SAND ✓
60	105	SHALE
105	160	SANDSTONE
160	225	SHALE
225	270	SANDSTONE
270	340	SHALE
340	365	SANDSTONE
365	405	SHALE

Mud _____ Brn _____ Lime _____

Rock Bit Number _____ Make _____

Remarks: Water @ 60'

Driller RONNIE BROWN