District I 1625 N French Dr., Hobbs, NM 88240 District II 1301 W. Grand Ave., Artesia, NM 88210 District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

# State of New Mexico **Energy Minerals and Natural Resources**

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

June 16, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

Form C-144

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the

appropriate NMOCD District Office.

1220 S. St. Francis Dr., Santa Fe, NM 87505

# Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

Type of action:	X Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
Please submit one	application (Form C-144) per individual pit, closed-loop system, below-grade tank or alte
Dle se he sdayed that app	royal of this request does not relieve the operator of highlity should operations result in pollution of surface water, ground water or t

Instructions: Please submit one application (Form C-144) per individu	
environment Nor does approval relieve the operator of its responsibility to comply with	
Operator: ConocoPhillips Company	OGRID#: 217817
Address: PO Box 4289, Farmington, NM 87499	RCVD JUL 15 '08
Facility or well name: Day B #17	nii cons, diu
	D Permit Number: DIST. 3
U/L or Qtr/Qtr: I(NESW) Section: 8 Township: 29N	Range: 8W County: San Juan
	ongitude: 107.691300' W NAD: X 1927 1983
Surface Owner: X Federal State Private Triba	al Trust or Indian Allotment
Pit: Subsection F or G of 19.15.17.11 NMAC	X Closed-loop Systems: Subsection H of 19.15.17.11 NMAC
Temporary: Drilling Workover	Drying Pad X Tanks Haul-off Bins Other:
Permanent Emergency Cavitation	Lined Unlined
Lined Unlined	Liner type: Thickness mil LLDPE HDPE PVC
Liner type: Thickness mil LLDPE HDPE PVC	Other:
Other String-Reinforced	Seams: Welded Factory Other:
Seams: Welded Factory Other	Volume: 500 bbl 104 yd3
Volume:bbl Dimensions: LxWxD	Dimernsions: Length 45' x Width 10'
Below-grade tank: Subsection 1 of 19 15 17.11 NMAC	Fencing: Subsection D of 19.15.17 11 NMAC
Volume:bbl	Chain link, six feet in height, two strangs of barbed wire at top
Type of fluid:	Four foot height, four strands of barbed wire evenly spaced between
Tank Construction Material:	one and four feet
Secondary containment with leak detection	Netting: Subsection E of 19.15.17.11
Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off	Screen Netting Other
Visible sidewalls and liner	Monthly inspections
Visible sidewalls only	Signs: Subsection C of 19.15.17.11 NMAC
Other:	12"x 24", 2" lettering, provided Operator's name, site location, and
Liner type: Thickness:mil HDPE PVC	emergency telephone numbers    X   Signed in compliance with 19.15.3.103 NMAC
	Signed in compriance with 19.13.3.103 NMAC
Alternative Method:	Administrative Approvals and Exceptions:
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration	Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.
of approval.	Please check a box if one or more of the following is requested, if not
	leave blank:
	Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau
	office for consideration of approval. (Fencing in Design Plan)
	Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.
	Dareau office for consideration of approval.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	□No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	□Yes	□No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	□No
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	□NA	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applied to permanent pits)	☐Yes ☐NA	□No
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Пил	
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	□No
- NM Office of the State Engineer - 1WATERS database search; Visual inspection (certification) of the proposed site.		
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	□No
<ul> <li>Written confirmation or verification from the municipality; Written approval obtained from the municipality</li> <li>Within 500 feet of a wetland.</li> <li>US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site</li> </ul>	Yes	□No
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	□No
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes	□No
Within a 100-year floodplain - FEMA map	Yes	□No
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.	9 NMAC	
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the de	ocuments ar	e attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintence Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	, NMAC	
Previously Approved Design (attach copy of API Number: or Permit		
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the attached.  Geologic and Hydrogeologic Data (required for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 NMAC	0.15.17.9	re
Siting Criteria Compliance Demonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NI  X Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  X Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC	MAC	
Previously Approved Design (attach copy of API Number:		

' <u>Permanent Pits Permit Application Checklist:</u> Subsection B of 19.15.17.9 NMAC					
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.					
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC					
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC					
Climatological Factors Assessment					
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC					
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC					
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC					
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC					
Quality Control/Quality Assurance Construction and Installation Plan					
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC					
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC					
Nuisance or Hazardous Odors, including H2S, Prevention Plan					
Emergency Response Plan					
Oil Field Waste Stream Characterization					
Monitoring and Inspection Plan					
Erosion Control Plan					
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
Closure Train - based upon the appropriate requirements of Subsection C of 19.13.17.3 NAMAC and 19.13.17.13 NAMAC					
Proposed Closure: 19.15.17.13 NMAC					
Type: Drilling Workover Emergency Cavitation Permanent Pit Below-grade Tank X Closed-loop System Altern	native				
Proposed Closure X Waste Excavation and Removal					
On-site Closure Method (only for temporary pits and closed-loop					
In-place On-site Trench					
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau f	or				
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC					
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommentations of acceptable source					
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate					
material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of					
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.					
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.	□Yes □No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□NA □				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste	NA □ Yes □ No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells	NA No No NA				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.					
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells					
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal					
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).					
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells.  Ground water is between 50 and 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells.  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells.  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site	NA  Yes No  NA  Yes No  NA  Yes No  NA  Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).					
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	NA  Yes No  NA  Yes No  NA  Yes No  NA  Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells.  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells.  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells.  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site.  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image.  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time	NA  Yes No  NA  Yes No  NA  Yes No  Yes No  Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	NA  Yes No  NA  Yes No  NA  Yes No  Yes No  Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells.  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells.  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells.  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site.  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image.  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time	NA Yes No NA Yes No NA Yes No NA Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal	NA  Yes No  NA  Yes No  NA  Yes No  Yes No  Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	NA Yes No NA Yes No NA Yes No NA Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal	NA Yes No NA Yes No NA Yes No NA Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	NA Yes No NA Yes No NA Yes No NA Yes No Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  Written confirmation or verification from the municipality; Written approval obtained from the municipality	NA  Yes No  NA  Yes No  NA  Yes No  Yes No  Yes No  Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	NA  Yes No  NA  Yes No  NA  Yes No  Yes No  Yes No  Yes No				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  Within 500 feet of a wetland.  Written confirmation or verification from the municipality; Written approval obtained from the municipality	NA   Yes   No   NA   Yes   No   NA   Yes   No   No   Yes   Yes				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  Within 500 feet of a wetland.  Written confirmation or verification from the municipality; Written approval obtained from the municipality	NA   Yes   No   NA   Yes   No   NA   Yes   No   No   Yes   Yes				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  Witten confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland.  Proposed site  Within the area overlying a subsurface mine.  Written confirmation or verification or ma	NA   Yes   No   NA   Yes   No   NA   Yes   No   No   Yes   Yes				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS databases earch; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  Within 500 feet of a wetland.  Within 500 feet of a wetland.  Within the area overlying a subsurface mine.  Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division  Within an unstable area.	NA   Yes   No   NA   Yes   No   NA   Yes   No   No   Yes   Yes				
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.  Ground water is less than 50 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  Within 500 feet of a wetland.  Figure of the State Engineer mine.  Witten confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area.	NA   Yes   No   NA   Yes   No   NA   Yes   No   No   Yes   Yes				

to the closure plan. Please indicfale, by a check mark in the box, that the documents are attached.						
to the closure plan. Please indicfate, by a check mark in the box, that the documents are attached.						
Protocols and Procedures - based upon the appropriate requirements of 19.15 17.13 NMAC  Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17 13 NMAC						
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)						
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC						
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC						
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC						
Waste Removal Closure for Closed-loop Systems That Utilize Haul-off Bins Only: (19 15 17 13.D NMAC) Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings.						
Disposal Facility Name: Envirotech, Basin Disposal Disposal Facility Permit Number. NM-01-0011 & NM-01-005						
On-Site Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of the following stems must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.						
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC						
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
Construction and Design of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC						
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC						
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17.13 NMAC						
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be						
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC						
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15 17.13 NMAC						
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15 17 13 NMAC						
Operator Application Certification:						
I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief						
Name (Print) Crystal Tafoya Title Regulatory Technician						
Signature. Comptal agrae Date: 7/15/2008						
e-mail address. crystal tafoya@conocoohillips.com Telephone. 505-326-9837						
OCD Approved. The most Application (malarity and application (malarity and application).						
OCD Approval: Permit Application (including closure plan)  OCD Representative Signature: Signature: Approval Date: 7-16-08						
OCD Representative Signature: Buand Odl Approval Date: 7-16-08						
OCD Representative Signature: Bund Odl Approval Date: 7-16-08  Title: Enviro / Spec OCD Permit Number						
OCD Representative Signature: Bund Odd Approval Date: 7-16-8  Title: English Spec OCD Permit Number  Closure Report (required within 60 days of closure completion): Subsection K of 19 15.17 13 NMAC						
OCD Representative Signature: Super OCD Permit Number OCD Permit N						
OCD Representative Signature: Squard Odd Approval Date: 7-16-8  Title: Engino   Spec OCD Permit Number  Closure Report (required within 60 days of closure completion): Subsection K of 19 15.17 13 NMAC  Closure Completion Date:  Closure Method:						
OCD Representative Signature:    Sum   Spec   OCD Permit Number						
OCD Representative Signature:    Sum   Spec   OCD Permit Number						
OCD Representative Signature:    Sum   Spec   OCD Permit Number						
OCD Representative Signature:    Sum   Spec   OCD Permit Number						
OCD Representative Signature:						
OCD Representative Signature:    Super						
OCD Representative Signature:						
OCD Representative Signature:    June   June						
OCD Representative Signature:						
OCD Representative Signature:						
OCD Representative Signature:    Superior   Superior   Superior   Subsection K of 19 15.17 13 NMAC	the					
OCD Representative Signature:	the					
OCD Representative Signature:    Superior   Superior   Superior   Subsection K of 19 15.17 13 NMAC	the					

District 1

1625 N: French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 88210

District: III

1000 Rio Brazos Rd., Aztoc, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico

Energy, Minerals & Natural Resources Department .
OIL CONSERVATION DIVISION

1220 South St. Francis Dr. Santa Fe, NM 87505

700 001 20 FM 8 57

Fee Lease - 3 Copies State Lease - 7 Copies

Submit to Appropriate District Office Revised June 10, 2003


Form C-102

□ AMMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

30-045	Number - 34	1024	,	Pool Code 1629		Ba	ool Name DI COAL		
Property Code 31519			5 Property Name OAY B						6 Well Number 17
7 OORID No. 217817		8 Operator Name CONOCOPHILLIPS COMPANY						6,379.7.6380	
	<sup>10</sup> SURFACE LOCATION								
UL or lot no.	Section	Township	Range	Lot Ida	Feet from the	North/South line	Feet from the	East/West line	County
L	8	29-N	W-8	ottom U	1381	SOUTH  If Different Fro	899	EAST	SAN JUAN
UL or lot no.	Section	Township	Range		Feet from the	North/South line	Feet from the	East/West line	County
Dodicated Acres	Joint	or infilt 14 (	Consolidation	Code 15	Order No.	<u>L</u>		<u> </u>	L

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

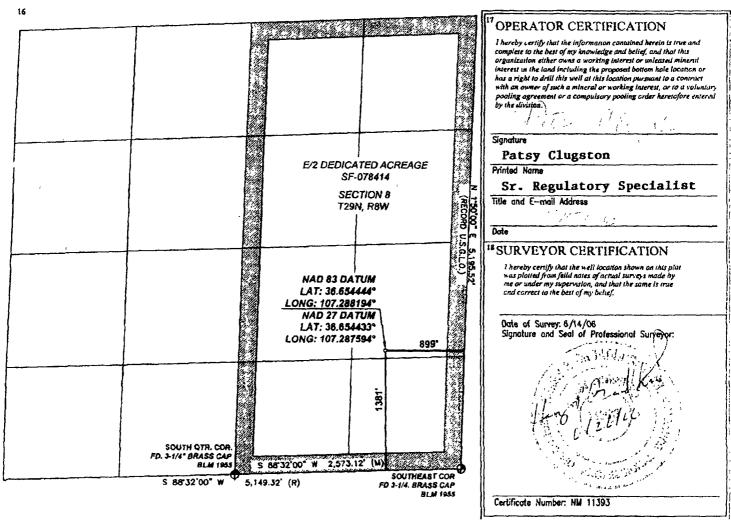

# **ConocoPhillips Company Closed-loop Plans**

### Closed-loop Design Plan

COPC's closed loop system will not entail a drying pad, temporary pit, below grade tank or sump. It will include an above ground tank suitable for holding the cuttings and fluids for rig operations. The tank will be sufficient volume to maintain a safe free board between disposal of the liquids and solids from rig operations.

- 1. Fencing is not required for an above ground closed-loop system
- 2. It will be signed in compliance with 19.15.3.103 NMAC
- 3. A frac tank will be on location to store fresh water

## **Closed-loop Operating and Maintenance Plan**

COPC's closed-loop tank will be operated and maintained to contain liquids and solids in order to prevent contamination of fresh water sources, in order to protect public health and the environment. To ensure the operation is maintained the following steps will be followed:

- 1. The liquids will be vacuumed out and disposed of at the Basin Disposal facility (Permit # NM-01-005). Solids in the closed-loop tank will be vacuumed out and disposed of at Envirotech (Permit # NM-01-0011) on a periodic basis to prevent over topping.
- 2. No hazardous waste, miscellaneous solid waste or debris will be discharged into or stored in the tank. Only fluids or cutting used or generated by rig operations will be placed or stored in the tank.
- 3. The division district office will be notified within 48 hours of the discovery of compromised integrity of the closed-loop tank. Upon the discovery of the compromised tank, repairs will be enacted immediately
- 4. All of the above operations will be inspected and a log will be signed and dated. During rig operations the inspection will be daily.

### **Closed-loop Closure Plan**

The closed-loop tank will be closed in accordance with 19.15.17.13. This will be done by transporting cuttings and all remaining sludges to Envirotech (Permit # NM-01-0011) immediately following rig operations. All remaining liquids will be transported and disposed of in the Basin Disposal facility (Permit # NM-01-005). The tanks will be removed from the location as part of the rig move. At time of well abandonment, the site will be reclaimed and re-vegetated to pre-existing conditions when possible.