# District I 1625 N. French Dr., Hobbs, NM 88240 District II 1301 W Grand Ave., Artesia, NM 88210

District IV

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr.

Form C-144 June 16, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Santa Fe, NM 87505 1000 Rio Brazos Rd, Aztec, NM 87410 1220 S. St Francis Dr, Santa Fe, NM 87505

<del></del>	Pit, Closed-Loop System, Below-Grade Tank, or RCVD JUL 22 '08
Propo	osed Alternative Method Permit or Closure Plan Application OIL CONS. DIV.
Type of action:	X Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method 151. 3
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of hability should operations result in pollution of surface water, ground water or the

environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances Operator: Burlington Resources Oil & Gas Company, LP Address: PO Box 4289, Farmington, NM 87499 Facility or well name: San Juan 27-5 Unit #139N 30-039-29353 OCD Permit Number: API Number: U/L or Qtr/Qtr: F(SENW) Section: 20 Township: 27N Range: 5W County: Rio Arriba Longitude: **107.3830830' W** NAD: **X** 1927 Center of Proposed Design: Latitude: 36.5612370' N Private Tribal Trust or Indian Allotment Surface Owner: X Federal Pit: Subsection F or G of 19.15.17.11 NMAC X Closed-loop Systems: Subsection H of 19.15.17.11 NMAC Drying Pad X Tanks Haul-off Bins Other: Drilling Workover Temporary: Permanent Emergency Cavitation Lined Unlined Liner type: Thickness \_\_\_\_ mil LLDPE HDPE PVC Lined Unlined mil LLDPE HDPE PVC String-Reinforced Seams: Welded Factory Other: Seams: Welded Factory Other Volume: 500 yd3 bbl Dimensions: Dimernsions: Length **45'** x Width Below-grade tank: Subsection I of 19.15.17.11 NMAC Fencing: Subsection D of 19 15.17.11 NMAC Volume: Chain link, six feet in height, two strangs of barbed wire at top Type of fluid: Four foot height, four strands of barbed wire evenly spaced between one and four feet Tank Construction Material: Subsection E of 19.15.17.11 Secondary containment with leak detection Netting: Screen Netting Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Monthly inspections Visible sidewalls only Signs: Subsection C of 19.15.17 11 NMAC Other: 12"x 24", 2" lettering, provided Operator's name, site location, and Liner type: Thickness: mil HDPE PVC emergency telephone numbers X Signed in compliance with 19.15.3.103 NMAC Other: Alternative Method: **Administrative Approvals and Exceptions:** Submittal of an exception request is required. Exceptions must be Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. submitted to the Santa Fe Environmental Bureau office for consideration of approval. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval. (Fencing in Design Plan) Exception(s): Requests must be submitted to the Santa Fe

Environmental Bureau office for consideration of approval

Siting Criteria (regarding permitting): 19.15.17.10 NMAC  Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.					
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	□No			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	Yes	□No			
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	□No			
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	□NA				
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image					
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No			
<ul> <li>(Applied to permanent pits)</li> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul>	∐NA				
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	□Yes	□No			
- NM Office of the State Engineer - 1WATERS database search; Visual inspection (certification) of the proposed site.					
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	□No			
- Written confirmation or verification from the municipality; Written approval obtained from the municipality					
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	□No			
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	□No			
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes	□No			
Within a 100-year floodplain - FEMA map	Yes	□No			
Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.	9 NMAC				
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the de-	ocuments ar	e attached.			
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC  Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC  Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintence Plan - based upon the appropriate requirements of 19.15.17.12 NMAC  Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC					
Previously Approved Design (attach copy of API Number: or Permit					
Closed-loop Systems Permit Application Attachment Checklist:  Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.  Geologic and Hydrogeologic Data (required for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9  Siting Criteria Compliance Demonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC  Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC  Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC					
X Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC  Previously Approved Design (attach copy of API Number:					

	Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC					
L LILL 1 CD 4 L L 4 CONTRACTOR OF CONTRACTOR D of 10 15 17 0 NIMAC	Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.					
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC						
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC						
Climatological Factors Assessment						
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC						
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC						
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC						
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC						
Quality Control/Quality Assurance Construction and Installation Plan						
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC						
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.12 NMAC						
Nuisance or Hazardous Odors, including H2S, Prevention Plan						
Emergency Response Plan Oil Field Waste Stream Characterization						
Monitoring and Inspection Plan						
Erosion Control Plan						
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC						
Proposed Closure: 19.15.17.13 NMAC						
	ative					
Type: Drilling Workover Emergency Cavitation Permanent Pit Below-grade Tank X Closed-loop System Altern	ative					
Proposed Closure X Waste Excavation and Removal						
On-site Closure Method (only for temporary pits and closed-loop						
☐ In-place ☐ On-site Trench						
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for	or					
Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC						
Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommentations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate						
district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of						
approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.						
Ground water is less than 50 feet below the bottom of the buried waste.	□Yes □No					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□NA □					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste	□NA □Yes □No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste</li> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul>	□NA □ □Yes □No □NA					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste</li> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> <li>Ground water is more than 100 feet below the bottom of the buried waste.</li> </ul>	NA Yes No NA Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste</li> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> <li>Ground water is more than 100 feet below the bottom of the buried waste.</li> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul>	NA  Yes No  NA  Yes No  NA					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal</li> </ul>	NA Yes No NA Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).</li> </ul>	NA  Yes No  NA  Yes No  NA					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).         <ul> <li>Topographic map; Visual inspection (certification) of the proposed site</li> </ul> </li> </ul>	NA Yes No NA Yes No NA Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).</li> </ul>	NA  Yes No  NA  Yes No  NA					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).         <ul> <li>Topographic map; Visual inspection (certification) of the proposed site</li> </ul> </li> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial         <ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul> </li> </ul>	NA Yes No NA Yes No NA Yes No Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).         <ul> <li>Topographic map; Visual inspection (certification) of the proposed site</li> </ul> </li> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial         <ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul> </li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic</li> </ul>	NA Yes No NA Yes No NA Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).         <ul> <li>Topographic map; Visual inspection (certification) of the proposed site</li> </ul> </li> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial         <ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul> </li> </ul>	NA Yes No NA Yes No NA Yes No Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).         <ul> <li>Topographic map; Visual inspection (certification) of the proposed site</li> </ul> </li> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial         <ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul> </li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time</li> </ul>	NA Yes No NA Yes No NA Yes No Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).         <ul> <li>Topographic map; Visual inspection (certification) of the proposed site</li> </ul> </li> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial         <ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> </ul> </li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.</li> </ul>	NA Yes No NA Yes No NA Yes No Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).         <ul> <li>Topographic map; Visual inspection (certification) of the proposed site</li> </ul> </li> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.         <ul> <li>NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site</li> </ul> </li> </ul>	NA Yes No NA Yes No NA Yes No Yes No					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal	NA Yes No NA Yes No NA Yes No Yes No					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	NA Yes No NA Yes No NA Yes No Yes No					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	NA Yes No NA Yes No NA Yes No Yes No Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).         <ul> <li>Topographic map; Visual inspection (certification) of the proposed site</li> </ul> </li> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.</li></ul>	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No					
<ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> <li>Ground water is between 50 and 100 feet below the bottom of the buried waste         <ul> <li>NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Ground water is more than 100 feet below the bottom of the buried waste.         <ul> <li>NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells</li> </ul> </li> <li>Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).         <ul> <li>Topographic map; Visual inspection (certification) of the proposed site</li> </ul> </li> <li>Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.</li></ul>	NA Yes No NA Yes No NA Yes No Yes No Yes No					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  - Visual inspection (certification) of the proposed site; Aernal photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  - Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland.  proposed site Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	NA  Yes No  NA  Yes No  NA  Yes No					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark) Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. proposed site Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area.	NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells  Ground water is more than 100 feet below the bottom of the buried waste.  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells  Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site  Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial  - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image  Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.  - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  - Written confirmation or verification from the municipality; Written approval obtained from the municipality  Within 500 feet of a wetland.  proposed site  Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division  Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM	NA  Yes No  NA  Yes No  NA  Yes No					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark) Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. proposed site Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area.	NA  Yes No  NA  Yes No  NA  Yes No					

Form C-144 Oil Conservation Division Page 3 of 4

to the closure plan Please inducfate, by a check mark in the box, that the documents are attached.    X   Protocols and Procedures - based upon the appropriate requirements of 19.15.17 13 NMAC						
Confirantion Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15.17 13 NMAC						
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)						
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC						
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17 13 NMAC						
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15 17 13 NMAC						
Waste Removal Closure for Closed-loop Systems That Utilize Haul-off Bins Only: (19 15 17 13 D NMAC) Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings.						
Disposal Facility Name. Envirotech, Basin Disposal Disposal Facility Permit Number. NM-01-0011 & NM-01-005						
On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the following items must bee attached to the closure plan. Please indicate, by a heck mark in the box, that the documents are attached.						
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC						
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
Construction and Design of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC						
Protocols and Procedures - based upon the appropriate requirements of 19 15.17.13 NMAC						
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be						
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC						
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC						
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC						
Operator Application Certification:						
hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief						
Name (Print): Crystal Tafoya Title: Regulatory Technician						
Signature Contal Taloisa Date: 7/21/2008						
-mail address crystal.tafoya@conocophilips.com Telephone: 505-326-9837						
OCD Approval: Permit Application (including clusture plan)  OCD Representative Signature: Buc. A Della Approval Date: 7-25-88						
7-26.00						
OCD Representative Signature: Bunch Dell Approval Date: 7-25-08						
OCD Representative Signature: Breach D-W Approval Date: 7-25-08  Sittle: Enviro /gp. OCD Permit Number						
OCD Representative Signature: Breach D-W Approval Date: 7-25-88  Sittle: Enviro /gre. OCD Permit Number  Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC  Closure Completion Date:						
OCD Representative Signature: Breach D-W Approval Date: 7-25-88  Sittle: Enviro /grev OCD Permit Number  Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC  Closure Completion Date:						
OCD Representative Signature: Breach D-W Approval Date: 7-25-88  Sittle: Enviro /grev OCD Permit Number  Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC  Closure Completion Date:						
Approval Date: 7-25-8  Citle: Enviro /gRev OCD Permit Number  Closure Report (required within 60 days of closure completion): Subsection K of 1915 1713 NMAC  Closure Method:  Waste Excavation and Removal On-Site Closure Alternative Closure  If different from approved plan, please explain						
Approval Date: 7-25-8  Sitle: Enviro /gper OCD Permit Number  Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC  Closure Method:  Waste Excavation and Removal On-Site Closure Alternative Closure						
Approval Date: 7-25-8    Color Representative Signature:   Stear of the following items must be attached to the closure report. Please inducate, by a check mark in the look, that the documents are attached.   Proof of Closure Notice   Proof of Closure						
Approval Date: 7-25-8    Course Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC   Closure Method:   Closure Completion Date:   Closure Method:   Alternative Closure   Alternative Closure   Closure from approved plan, please explain   Closure Report Attactment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the lock, that the documents are attached.   Proof of Closure Notice   Proof of Deed Notice (if applicable)						
Approval Date: 7-25-88    Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC   Closure Method:   Closure Completion Date:   Closure Completion Date:   Closure Method:   Closure First Closure   Closure Closure   Closure Closure   Closure Closure   Closure Closure   Closure   Closure Closure   Closure						
Approval Date: 7-25-8    Course Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC   Closure Method:   Closure Completion Date:   Closure Method:   Alternative Closure   Alternative Closure   Closure from approved plan, please explain   Closure Report Attactment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the lock, that the documents are attached.   Proof of Closure Notice   Proof of Deed Notice (if applicable)						
Approval Date: 7-25-08  Citle: Enviro /g/L. OCD Permit Number  Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC  Closure Method:  Waste Excavation and Removal On-Site Closure Alternative Closure  If different from approved plan, please explain  Closure Report Attactment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the rox, that the documents are attached.  Proof of Closure Notice  Proof of Deed Notice (if applicable)  Plot Plan  Confirmation Sampling Analytical Results						
Approval Date: 7-25-08    Consumption   Cons						
Approval Date: 7-25-08    Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC   Closure Completion Date:   Closure Closure Closure Closure   Alternative Closure   If different from approved plan, please explain   Closure Report Attactment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the foot, that the documents are attached.   Proof of Closure Notice   Proof of Closure Notice   Proof of Closure Notice   Proof of Deed Notice (if applicable)   Plot Plan   Confirmation Sampling Analytical Results   Waste Material Sampling Analytical Results   Disposal Facility Name and Permit Number   Soil Backfilling and Cover Installation   Re-vegetation Application Rates and Seeding Technique						
Approval Date: 7-25-88    Color Representative Signature:   Stear   St						
Approval Date: 7-25-08    Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC   Closure Completion Date:   Closure Closure Closure Closure   Alternative Closure   If different from approved plan, please explain   Closure Report Attactment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the foot, that the documents are attached.   Proof of Closure Notice   Proof of Closure Notice   Proof of Closure Notice   Proof of Deed Notice (if applicable)   Plot Plan   Confirmation Sampling Analytical Results   Waste Material Sampling Analytical Results   Disposal Facility Name and Permit Number   Soil Backfilling and Cover Installation   Re-vegetation Application Rates and Seeding Technique						
Approval Date: 7-25-88    Color Representative Signature:   Stear   St						
Approval Date: 7-25-08    Course Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC   Closure Completion Date:   Closure Completion Date:   Closure Method:   Waste Excavation and Removal   On-Site Closure   Alternative Closure   If different from approved plan, please explain   Closure Report Attactment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the loss, that the documents are attached.   Proof of Closure Notice   Proof of Deed Notice (if applicable)   Plot Plan   Confirmation Sampling Analytical Results   Waste Material Sampling Analytical Results   Disposal Facility Name and Permit Number   Soil Backfilling and Cover Installation   Revegetation Application Rates and Seeding Technique   Site Reclamation (Photo Documentation)   On-site Closure   Latitude.   Longitude:   NAD:   1927   1983						
Approval Date: 7-25-88    Continue   Continu						
Approval Date: 7-25-88    Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC   Closure Method:						

Form C-144 Oil Conservation Division Page 4 of 4

District I PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Artesia, NM 88211-0719

District III 1000 Rio Brazos Rd., Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe. NM 87504-2088

Form C-102 Revised February 21, 1994 Instructions on back Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies


AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

'API Numbe	Pool Code	³Pool Name	
30-039-29	1353   71599 / 72319	Basin Dakota / Blanco Mesaverde	!
Property Code		Property Name	*Well Number
7454	SAN	139N	
OGRID No.		*Elevation	
14538	BURLINGTON RESOU	RCES OIL & GAS COMPANY, LP	6580

<sup>10</sup> Surface Location UL or lot no. Lot Idn Feet from the North/South line East/West line Feet from the RIÓ 20 27N 5W 1750 NORTH 2160 WEST ARRIBA 11 Bottom From Surface Hole Location If Different UL or lot no. Section Township Lot Idn Feet from the North/South line Feet from the East/West line County F 12 Dedicated Acres <sup>13</sup> Joint or Infill <sup>34</sup> Consolidation Code MV & DK 320 W/2

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

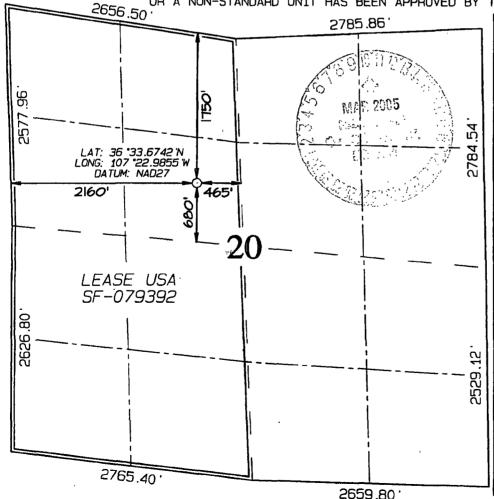

OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief Signature Patsy Clugston Printed Name Sr. Regulatory Specialist Title 8/10/04 Date "SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date of Survey: JUNE 16, 2004 Signature and Seal of Professional Surveyor EDWARDS SEN METIC 15269 AND ESSION Certificate Number

15269

# Burlington Resources Oil & Gas Company, LP Closed-loop Plans

# Closed-loop Design Plan

BR's closed loop system will not entail a drying pad, temporary pit, below grade tank or sump. It will include an above ground tank suitable for holding the cuttings and fluids for rig operations. The tank will be sufficient volume to maintain a safe free board between disposal of the liquids and solids from rig operations.

- 1. Fencing is not required for an above ground closed-loop system
- 2. It will be signed in compliance with 19.15.3.103 NMAC
- 3. A frac tank will be on location to store fresh water

# **Closed-loop Operating and Maintenance Plan**

BR's closed-loop tank will be operated and maintained to contain liquids and solids in order to prevent contamination of fresh water sources, in order to protect public health and the environment. To ensure the operation is maintained the following steps will be followed:

- 1. The liquids will be vacuumed out and disposed of at the Basin Disposal facility (Permit # NM-01-005). Solids in the closed-loop tank will be vacuumed out and disposed of at Envirotech (Permit # NM-01-0011) on a periodic basis to prevent over topping.
- 2. No hazardous waste, miscellaneous solid waste or debris will be discharged into or stored in the tank. Only fluids or cutting used or generated by rig operations will be placed or stored in the tank.
- 3. The division district office will be notified within 48 hours of the discovery of compromised integrity of the closed-loop tank. Upon the discovery of the compromised tank, repairs will be enacted immediately
- 4. All of the above operations will be inspected and a log will be signed and dated. During rig operations the inspection will be daily.

### **Closed-loop Closure Plan**

The closed-loop tank will be closed in accordance with 19.15.17.13. This will be done by transporting cuttings and all remaining sludges to Envirotech (Permit # NM-01-0011) immediately following rig operations. All remaining liquids will be transported and disposed of in the Basin Disposal facility (Permit # NM-01-005). The tanks will be removed from the location as part of the rig move. At time of well abandonment, the site will be reclaimed and re-vegetated to pre-existing conditions when possible.