District I 5 1625 N. French Dr , Hobbs, NM 88240 District II 1301 W. Grand Ave, Artesia, NM 88210 District III 1000 Rio Brazos Rd., Aztec, NM 87410

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

June 16, 2008 For temporary pits, closed-loop sytems, and below-grade

Form C-144

tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe

| District IV 1220 S St. Francis Dr., Santa Fe, NM 87505 | Environmental Bureau office and provide a copy to the appropriate NMOCD District Office. |
|--|--|
| Pit, Closed-Loop System Proposed Alternative Method Per | mit or Closure Plan Application |
| | ulity should operations result in pollution of surface water, ground water or the |
| Operator: ConocoPhillips Company | OGRID#: <u>217817</u> |
| Address: PO Box 4289, Farmington, NM 87499 | |
| Facility or well name: Lackey B LS #16M | |
| API Number: 30-045-30903 Oc | CD Permit Number: |
| | Range: 9W County: San Juan Longitude: 107.80648300' W NAD: X 1927 1983 al Trust or Indian Allotment |
| Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: Drilling Workover Permanent Emergency Cavitation Lined Unlined Liner type: Thickness mil LLDPE HDPE PVC Other String-Reinforced Seams: Welded Factory Other Volume: bbl Dimensions: L xW xD | X Closed-loop Systems: Subsection H of 19.15.17.11 NMAC Drying Pad X Tanks |
| Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: bbl Type of fluid: Tank Construction Material: Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other: HDPE PVC Other: | Fencing: Subsection D of 19.15 17.11 NMAC Chain link, six feet in height, two strangs of barbed wire at top Four foot height, four strands of barbed wire evenly spaced between one and four feet Netting: Subsection E of 19.15.17.11 Screen Netting Other Monthly inspections Signs: Subsection C of 19.15.17.11 NMAC 12"x 24", 2" lettering, provided Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19.15.3.103 NMAC |
| Alternative Method: Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. | Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval. (Fencing in Design Plan) Exception(s): Requests must be submitted to the Santa Fe |

Environmental Bureau office for consideration of approval.

| Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system. | | | | | | |
|---|-------------|---------------|--|--|--|--|
| Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells | Yes | □No | | | | |
| Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site | □Yes | □No | | | | |
| Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. | Yes | □No | | | | |
| (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | □NA | | | | | |
| Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. | ∏Yes | □No | | | | |
| (Applied to permanent pits) | □ NA | | | | | |
| - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | | 1 | | | | |
| Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. | ∐Yes | ∐No | | | | |
| - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site. | | | | | | |
| Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended | Yes | □No | | | | |
| Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site | Yes | □No | | | | |
| Within the area overlying a subsurface mine. | П у | □N- | | | | |
| - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division | ∐Yes | | | | | |
| Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map | ∐Yes | ∐No | | | | |
| Within a 100-year floodplain - FEMA map | Yes | □No | | | | |
| Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Operating and Maintence Plan - based upon the appropriate requirements of 19.15.17.19 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of API Number: or Permit | | | | | | |
| Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC | | | | | | |
| Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the | documents a | re | | | | |
| attached. Geologic and Hydrogeologic Data (required for an esta alegura), based upon the requirements of Personants (2) of Subsection B of 10 | 15 17 0 | | | | | |
| Geologic and Hydrogeologic Data (required for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19 Siting Criteria Compliance Demonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NI | | | | | | |
| String Cheria Compliance Behonstrations (required for on-site closure) - based upon the appropriate requirements of 19.15.17.10 No X Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC | MAC | | | | | |
| X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC | | | | | | |
| X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC X Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC | | | | | | |
| Previously Approved Design (attach copy of API Number: | | | | | | |

| Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC | | | | | | | |
|--|---|--|--|--|--|--|--|
| Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. | | | | | | | |
| Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC | | | | | | | |
| Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC | | | | | | | |
| Climatological Factors Assessment | | | | | | | |
| Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC | | | | | | | |
| Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC | | | | | | | |
| Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC | | | | | | | |
| Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC | | | | | | | |
| Quality Control/Quality Assurance Construction and Installation Plan | | | | | | | |
| Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC | | | | | | | |
| Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC | | | | | | | |
| Nuisance or Hazardous Odors, including H2S, Prevention Plan | | | | | | | |
| Emergency Response Plan | | | | | | | |
| Oil Field Waste Stream Characterization | | | | | | | |
| Monitoring and Inspection Plan | | | | | | | |
| Erosion Control Plan | | | | | | | |
| Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC | | | | | | | |
| | | | | | | | |
| Proposed Closure: 19.15.17.13 NMAC | | | | | | | |
| Type: Drilling Workover Emergency Cavitation Permanent Pit Below-grade Tank X Closed-loop System Altern | native | | | | | | |
| | | | | | | | |
| Proposed Closure X Waste Excavation and Removal | | | | | | | |
| On-site Closure Method (only for temporary pits and closed-loop | | | | | | | |
| ☐ In-place ☐ On-site Trench ☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau f | | | | | | | |
| Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau I | Or | | | | | | |
| Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC | | | | | | | |
| Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommentations of acceptable source | | | | | | | |
| material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate | | | | | | | |
| district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justification and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance. | | | | | | | |
| 11 | | | | | | | |
| | · | | | | | | |
| Ground water is less than 50 feet below the bottom of the buried waste. | ∏Yes∏No | | | | | | |
| Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells | ∏Yes ∏No ∏NA | | | | | | |
| | <u> </u> | | | | | | |
| - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells | □NA □ | | | | | | |
| - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste | □NA □Yes □No | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells | □NA □Yes □No □NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. | □NA □Yes□No □NA □Yes□No | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). | NA Yes No NA Yes No NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sınkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site | NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial | NA Yes No NA Yes No NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic | NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image | NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time | NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. | NA Yes No NA Yes No NA Yes No Yes No | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site | NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal | NA Yes No NA Yes No NA Yes No Yes No | | | | | | |
| - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended | NA Yes No NA Yes No NA Yes No Yes No | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Written confirmation or verification from the municipality; Written approval obtained from the municipality | NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. | NA | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. | NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No | | | | | | |
| - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. proposed site Within the area overlying a subsurface mine. | NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No | | | | | | |
| NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes,or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. proposed site Within the area overlying a subsurface mine. Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division | NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No | | | | | | |
| - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. | NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No | | | | | | |
| - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database serach; USGS; Data obtained from nearby wells Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lal (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. proposed site Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an unstable area. - Engineering measures incorporated into the design; NM Burcau of Geology & Mineral Resources; USGS; NM | NA Yes No NA Yes No NA Yes No Yes No Yes No Yes No Yes No | | | | | | |

| Waste Excavation and Removal Closure Plan Checklist: (19.15 17 13 NMAC) Instructions: Each of the following items must be attached | | | | | | |
|--|--|--|--|--|--|--|
| to the closure plan. Please indicfate, by a check mark in the box, that the documents are attached. | | | | | | |
| Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC | | | | | | |
| Confiramtion Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15 17.13 NMAC X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) | | | | | | |
| Soil Backfill and Cover Design Specifications - based upon the approp | | | | | | |
| X Re-vegetation Plan - based upon the appropriate requirements of Subs | • | | | | | |
| X Site Reclamation Plan - based upon the appropriate requirements of Su | | | | | | |
| | | | | | | |
| Waste Removal Closure for Closed-loop Systems That Utilize Haul-off I facilities for the disposal of liquids, drilling fluids and drill cuttings. | | | | | | |
| Disposal Facility Name: Envirotech, Basin Disposal | Disposal Facility Permit Number: NM-01-0011 & NM-01-005 | | | | | |
| On-Site Closure Plan Checklist: (19 15 17 13 NMAC) Instructions: Each of the check mark in the box, that the documents are attached. | following items must bee attached to the closure plan. Please indicate, by a | | | | | |
| Siting Criteria Compliance Demonstrations - based upon the appropria | te requirements of 19.15.17.10 NMAC | | | | | |
| Proof of Surface Owner Notice - based upon the appropriate requirement | ents of Subsection F of 19.15 17 13 NMAC | | | | | |
| Construction and Design of Burial Trench (if applicable) based upon t | he appropriate requirements of 19.15.17.11 NMAC | | | | | |
| Protocols and Procedures - based upon the appropriate requirements o | f 19 15 17.13 NMAC | | | | | |
| Confirmation Sampling Plan (if applicable) - based upon the appropria | te requirements of Subsection F of 19.15.17.13 NMAC | | | | | |
| Waste Material Sampling Plan - based upon the appropriate requireme | nts of Subsection F of 19.15.17.13 NMAC | | | | | |
| Disposal Facility Name and Permit Number (for liquids, drilling fluids | and drill cuttings or in case on-site closure standards cannot be | | | | | |
| Soil Cover Design - based upon the appropriate requirements of Subse | ction H of 19.15.17.13 NMAC | | | | | |
| Re-vegetation Plan - based upon the appropriate requirements of Subs | ection I of 19.15.17.13 NMAC | | | | | |
| Site Reclamation Plan - based upon the appropriate requirements of St | absection G of 19.15.17.13 NMAC | | | | | |
| Operator Application Certification: | | | | | | |
| I hereby certify that the information submitted with this application is true, accurat | e and complete to the best of my knowledge and belief. | | | | | |
| Name (Print) Crystal Tafoya | Title. Regulatory Technician | | | | | |
| Signature. Castal Talana | Date: 7/21/2008 | | | | | |
| e-mail address: ovstal tafoya@conocopyillips.com | Telephone: 505-326-9837 | | | | | |
| | | | | | | |
| OCD Approval: Permit Application (including closure plan) Closure Plan (only) | | | | | | |
| | | | | | | |
| OCD Representative Signature: Brand Sell | Closure Plan (only) Approval Date: 7-25-08 | | | | | |
| | | | | | | |
| OCD Representative Signature: Brand Sell | OCD Permit Number | | | | | |
| OCD Representative Signature: Branch Fill Title: EUVINO (5 pec | OCD Permit Number | | | | | |
| OCD Representative Signature: Branch Fill Title: EUVINO (5 pec | Approval Date: 7-25-08 OCD Permit Number | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: | Approval Date: 7-25-08 OCD Permit Number | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ermative Closure s must be attached to the closure report. Please indicate, by a check mark in the | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ernative Closure | | | | | |
| Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) | Approval Date: 7-25-08 OCD Permit Number 17 13 NMAC Closure Completion Date: ermative Closure s must be attached to the closure report. Please indicate, by a check mark in the | | | | | |
| OCD Representative Signature: Title: Enviro Spec Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude | Approval Date: 7-25-08 OCD Permit Number To 13 NMAC Closure Completion Date: ernative Closure s must be attached to the closure report. Please indicate, by a check mark in the Longitude: NAD. 1927 1983 The accurate and complete to the best of my knowledge and belief 1 also certify that the | | | | | |
| Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is to | Approval Date: 7-25-08 OCD Permit Number To 13 NMAC Closure Completion Date: ernative Closure s must be attached to the closure report. Please indicate, by a check mark in the Longitude: NAD. 1927 1983 The accurate and complete to the best of my knowledge and belief 1 also certify that the | | | | | |
| Closure Report (required within 60 days of closure completion): Subsection K of 19 15 Closure Method: Waste Excavation and Removal On-Site Closure Alt If different from approved plan, please explain Closure Report Attactment Checklist: Instructions: Each of the following items box, that the documents are attached. Proof of Closure Notice Proof of Deed Notice (if applicable) Plot Plan Confirmation Sampling Analytical Results Waste Material Sampling Analytical Results Disposal Facility Name and Permit Number Soil Backfilling and Cover Installation Re-vegetation Application Rates and Seeding Technique Site Reclamation (Photo Documentation) On-site Closure Latitude Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is tre closure complies with all applicable closure requirements and conditions specified in the applicable with all applicable closure requirements and conditions specified in the applicable closure requirements. | Approval Date: 7-25-08 OCD Permit Number To 13 NMAC Closure Completion Date: ernative Closure smust be attached to the closure report. Please indicate, by a check mark in the Longitude: NAD. 1927 1983 i.e., accurate and complete to the best of my knowledge and belief 1 also certify that the proved closure plan | | | | | |

Form C-144 Oil Conservation Division Page 4 of 4

District I PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DO, Artesia, NM 88211-0719

District III 1000 Rio Brazos Ad. Aztec, NM 87410

District IV PO Box 2088, Santa Fe, NM 87504-2088

State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088 Santa Fe, NM 87504-2088


Form C 102

Revised February 21, 1994

Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

AMENDED REPORT

| | | | WELL | LOCAT | A DUA NOI | CREAGE DED | ICAT | ION PL | .AT | | | |
|---------------------------------------|----------|----------|--------|--------------------------|--|----------------------------------|---------------------|-----------------------|----------------|-------------|-------------|--------|
| 'API Number | | | | | ^a Pool Code | | ³Pool Name | | | | | |
| 130-04 | 5-0 | 070 | ろ | 723 | 19 / 71599 | BLANCO MESAVERDE / BASIN | | | | | N DAKOTA | |
| *Property Code | | | | | *Property Name | | | | | Well Number | | |
| 223 | 45 | | | | B LS | | | | 16M | | | |
| OGRIO I | ٧٥. | | | | *Operator | Name | | | | *Elevation | | |
| 00507 | 005073 C | | | | | CONOCO, INC. | | | | 5914 | | |
| ¹⁰ Surface Location | | | | | | | | | | | | |
| U. or lot no. | Section | Township | Range | Lot Ion | Feet from the | North/South Time | Fee | it from the | East/We | st line | County | \neg |
| Р | 50 | 28N | 9₩ | | 835 | SOUTH | 1 | 1200 | | ST | SAN JL | JAN |
| | | 11 🖯 | ottom | Hole L | ocation I | f Different | Fro | m Surf | ace | | | |
| Ut or lot no | Section | Townshap | Range | Lat Idn | Feet from the | North/South Tyne | Fac | Faet from the East/He | | st lune | County | |
| | | | | | | | <u> </u> | | | | | |
| W Doduceted Acres 320.0 Acres - (E/2) | | | | | Doint or Infall | ¹⁴ Consolidation Code | ¹⁵ Order | No | | | | |
| SEG. 0 713. CO (E/E/ | | | | | | | | }} | | | | |
| NO ALLOW | ABLE W | ILL BE A | NON-ST | D TO TH CANDARD | IS COMPLETION OF THE COMPLETIO | ON UNTIL ALL | INTE By T | RESTS H | AVE BE SION | EN CO | NSOL IDATE | ED |
| 5280.00 | | | | " OPERATOR CERTIFICATION | | | | | | ON | | |
| | | | | | I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief | | | | | | | |
| | | | | | SF-077105 Diskir K | | | | ? [L | 2 Warthe | | |
| | | | | Signature | | | | Ü | | | | |

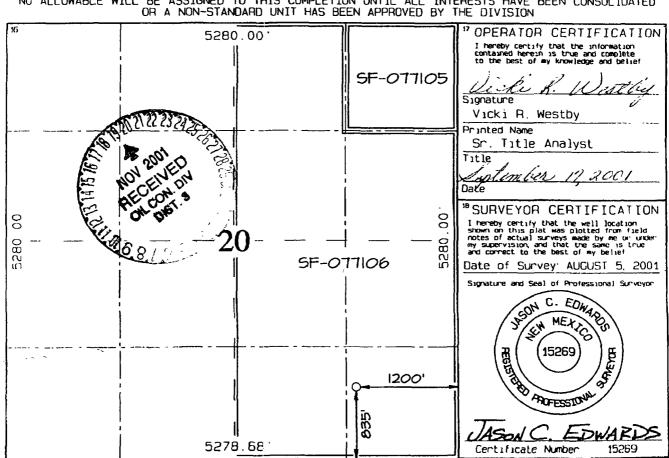

ConocoPhillips Company Closed-loop Plans

Closed-loop Design Plan

COPC's closed loop system will not entail a drying pad, temporary pit, below grade tank or sump. It will include an above ground tank suitable for holding the cuttings and fluids for rig operations. The tank will be sufficient volume to maintain a safe free board between disposal of the liquids and solids from rig operations.

- 1. Fencing is not required for an above ground closed-loop system
- 2. It will be signed in compliance with 19.15.3.103 NMAC
- 3. A frac tank will be on location to store fresh water

Closed-loop Operating and Maintenance Plan

COPC's closed-loop tank will be operated and maintained to contain liquids and solids in order to prevent contamination of fresh water sources, in order to protect public health and the environment. To ensure the operation is maintained the following steps will be followed:

- 1. The liquids will be vacuumed out and disposed of at the Basin Disposal facility (Permit # NM-01-005). Solids in the closed-loop tank will be vacuumed out and disposed of at Envirotech (Permit # NM-01-0011) on a periodic basis to prevent over topping.
- 2. No hazardous waste, miscellaneous solid waste or debris will be discharged into or stored in the tank. Only fluids or cutting used or generated by rig operations will be placed or stored in the tank.
- 3. The division district office will be notified within 48 hours of the discovery of compromised integrity of the closed-loop tank. Upon the discovery of the compromised tank, repairs will be enacted immediately
- 4. All of the above operations will be inspected and a log will be signed and dated. During rig operations the inspection will be daily.

Closed-loop Closure Plan

The closed-loop tank will be closed in accordance with 19.15.17.13. This will be done by transporting cuttings and all remaining sludges to Envirotech (Permit # NM-01-0011) immediately following rig operations. All remaining liquids will be transported and disposed of in the Basin Disposal facility (Permit # NM-01-005). The tanks will be removed from the location as part of the rig move. At time of well abandonment, the site will be reclaimed and re-vegetated to pre-existing conditions when possible.