

30-045-34656



Job Number:
 Company: Devon Energy
 Lease/Well: NEBU 255H
 Location: San Juan County
 Rig Name:
 RKB:
 G.L. or M.S.L.:

State/Country: NM
 Declination:
 Grid:
 File name: J:\CUST08~1\SURVEYS\DEVON\08218.SVY
 Date/Time: 26-Aug-08 / 09:41
 Curve Name: As Drilled

Inwell Inc

WINSERVE SURVEY CALCULATIONS
 Minimum Curvature Method
 Vertical Section Plane 143.40
 Vertical Section Referenced to Wellhead
 Rectangular Coordinates Referenced to Wellhead

RCVD SEP 19 '08

OIL CONS. DIV.
 DIST. 3

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	CLOSURE Distance FT	Direction Deg	Dogleg Severity Deg/100
.00	.00	.00	.00	.00	.00	.00	.00	.00	.00
2215.00	.00	.00	2215.00	.00	.00	.00	.00	.00	.00
2245.00	1.40	21.20	2245.00	.34	.13	-.20	.37	21.20	4.67
2275.00	1.90	21.20	2274.98	1.15	.44	-.66	1.23	21.20	1.67
2306.00	1.90	60.50	2305.97	1.88	1.08	-.87	2.17	29.84	4.12
2338.00	2.90	99.90	2337.94	2.00	2.34	-.21	3.08	49.43	5.85
2369.00	5.20	118.70	2368.86	1.19	4.34	1.63	4.50	74.65	8.47
2398.00	7.60	124.80	2397.68	-.53	7.07	4.64	7.09	94.32	8.59
2429.00	10.20	127.20	2428.31	-3.36	10.94	9.22	11.45	107.09	8.47
2460.00	12.40	133.80	2458.70	-7.33	15.53	15.14	17.17	115.26	8.22


Filed amended "As Drilled" plat
 & 3/60-4 for Correl. producing interval

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
Start MWD Surveys									
2492.00	14.20	137.80	2489.85	-12.61	20.65	22.44	24.20	121.42	6.31
2523.00	15.70	141.80	2519.80	-18.73	25.80	30.41	31.88	125.98	5.87
2555.00	16.50	143.90	2550.54	-25.80	31.15	39.29	40.45	129.64	3.09
2586.00	17.80	146.00	2580.16	-33.29	36.39	48.42	49.32	132.45	4.64
2617.00	19.20	147.40	2609.56	-41.51	41.79	58.24	58.90	134.81	4.74
2648.00	20.80	147.10	2638.69	-50.43	47.53	68.82	69.29	136.70	5.17
2679.00	22.30	147.10	2667.52	-59.99	53.71	80.18	80.52	138.16	4.84
2710.00	24.30	147.30	2695.99	-70.29	60.35	92.42	92.65	139.35	6.46
2742.00	27.00	148.10	2724.84	-82.00	67.75	106.23	106.37	140.44	8.51
2773.00	29.90	149.00	2752.09	-94.60	75.45	120.93	121.01	141.43	9.46
2804.00	32.40	149.60	2778.62	-108.39	83.63	136.88	136.91	142.35	8.13
2835.00	35.20	149.80	2804.38	-123.28	92.33	154.02	154.02	143.17	9.04
2864.00	37.90	149.90	2827.67	-138.21	101.00	171.18	171.19	143.84	9.31
2895.00	40.30	149.80	2851.73	-155.12	110.82	190.61	190.64	144.46	7.74
2927.00	42.90	149.30	2875.65	-173.43	121.59	211.73	211.81	144.97	8.19
2958.00	45.50	148.20	2897.88	-191.90	132.81	233.24	233.37	145.31	8.74
2990.00	47.70	147.10	2919.86	-211.54	145.25	256.43	256.61	145.53	7.31
3021.00	49.90	146.40	2940.28	-231.04	158.04	279.71	279.92	145.63	7.30
3051.00	52.60	145.30	2959.06	-250.40	171.18	303.09	303.32	145.64	9.44
3082.00	56.00	143.80	2977.14	-270.90	185.78	328.25	328.48	145.56	11.65
3113.00	59.60	142.00	2993.66	-291.81	201.61	354.47	354.68	145.36	12.61
3144.00	63.20	141.10	3008.50	-313.12	218.53	381.67	381.84	145.09	11.89
3180.00	67.20	141.00	3023.60	-338.53	239.07	414.32	414.44	144.77	11.11
3205.00	70.70	141.00	3032.57	-356.66	253.75	437.63	437.72	144.57	14.00
3237.00	71.50	141.10	3042.94	-380.21	272.78	467.88	467.94	144.34	2.52
3329.00	71.20	141.30	3072.36	-448.14	327.40	554.98	555.00	143.85	.39
3423.00	70.10	141.30	3103.51	-517.35	382.86	643.61	643.61	143.50	1.17
3515.00	69.40	142.80	3135.35	-585.41	435.94	729.90	729.90	143.33	1.71

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	CLOSURE		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
<i>Start Latval</i> <i>3856</i> 3609.00	71.40	142.20	3166.88	-655.66	489.84	818.43	818.44	143.24	2.21
3703.00	71.80	142.50	3196.55	-726.28	544.33	907.61	907.62	143.15	.52
3797.00	73.10	143.50	3224.90	-797.86	598.26	997.23	997.24	143.14	1.72
3891.00	73.00	143.60	3252.30	-870.18	651.68	1087.15	1087.16	143.17	.15
3984.00	73.70	143.80	3278.95	-941.99	704.43	1176.25	1176.25	143.21	.78
4078.00	72.40	144.00	3306.35	-1014.64	757.41	1266.16	1266.16	143.26	1.40
4170.00	73.10	144.00	3333.63	-1085.72	809.05	1354.01	1354.02	143.31	.76
4268.00	71.90	143.10	3363.10	-1160.90	864.58	1447.48	1447.48	143.32	1.51
4337.00	72.20	146.90	3384.37	-1214.66	902.22	1513.08	1513.08	143.40	5.26
4368.00	73.10	146.80	3393.62	-1239.44	918.40	1542.61	1542.61	143.46	2.92
4398.00	74.10	145.80	3402.09	-1263.38	934.36	1571.35	1571.36	143.51	4.62
4429.00	76.30	143.90	3410.01	-1287.88	951.62	1601.31	1601.32	143.54	9.25
4460.00	79.20	142.10	3416.58	-1312.07	969.85	1631.60	1631.61	143.53	10.94
4519.00	82.40	141.20	3426.02	-1357.74	1005.98	1689.81	1689.81	143.46	5.63
4551.00	85.90	140.80	3429.28	-1382.47	1026.01	1721.61	1721.61	143.42	11.01
4585.00	89.00	139.80	3430.79	-1408.60	1047.71	1755.52	1755.52	143.36	9.58
4617.00	92.20	139.90	3430.46	-1433.06	1068.34	1787.45	1787.46	143.30	10.00
4648.00	93.00	139.90	3429.05	-1456.74	1088.29	1818.36	1818.37	143.24	2.58
4679.00	93.40	140.00	3427.32	-1480.44	1108.20	1849.26	1849.27	143.18	1.33
4773.00	92.00	141.20	3422.89	-1552.99	1167.80	1943.04	1943.07	143.06	1.96
4867.00	92.70	142.50	3419.04	-1626.85	1225.81	2036.92	2036.97	143.00	1.57
4960.00	91.90	144.40	3415.30	-1701.49	1281.15	2129.84	2129.89	143.02	2.22
5054.00	90.20	145.50	3413.58	-1778.43	1335.12	2223.79	2223.82	143.10	2.15
5149.00	91.20	145.80	3412.42	-1856.86	1388.72	2318.70	2318.72	143.21	1.10
5242.00	89.00	144.90	3412.26	-1933.36	1441.59	2411.64	2411.65	143.29	2.56
5334.00	89.70	144.90	3413.30	-2008.62	1494.49	2503.61	2503.61	143.35	.76
5427.00	91.20	144.80	3412.57	-2084.66	1548.03	2596.57	2596.57	143.40	1.62
5521.00	90.30	143.50	3411.34	-2160.84	1603.07	2690.55	2690.55	143.43	1.68
5614.00	88.80	143.40	3412.07	-2235.55	1658.45	2783.55	2783.55	143.43	1.62

Measured Depth FT	Incl Angle Deg	Drift Direction Deg	True Vertical Depth	N-S FT	E-W FT	Vertical Section FT	C L O S U R E		Dogleg Severity Deg/100
							Distance FT	Direction Deg	
5711.00	89.60	142.90	3413.43	-2313.16	1716.62	2880.53	2880.53	143.42	.97
Projected to Bit									
5760.00	89.60	142.90	3413.77	-2352.24	1746.18	2929.53	2929.53	143.41	.00

Company: Devon Energy
 Lease/Well: NEBU 255H
 Location: San Juan County

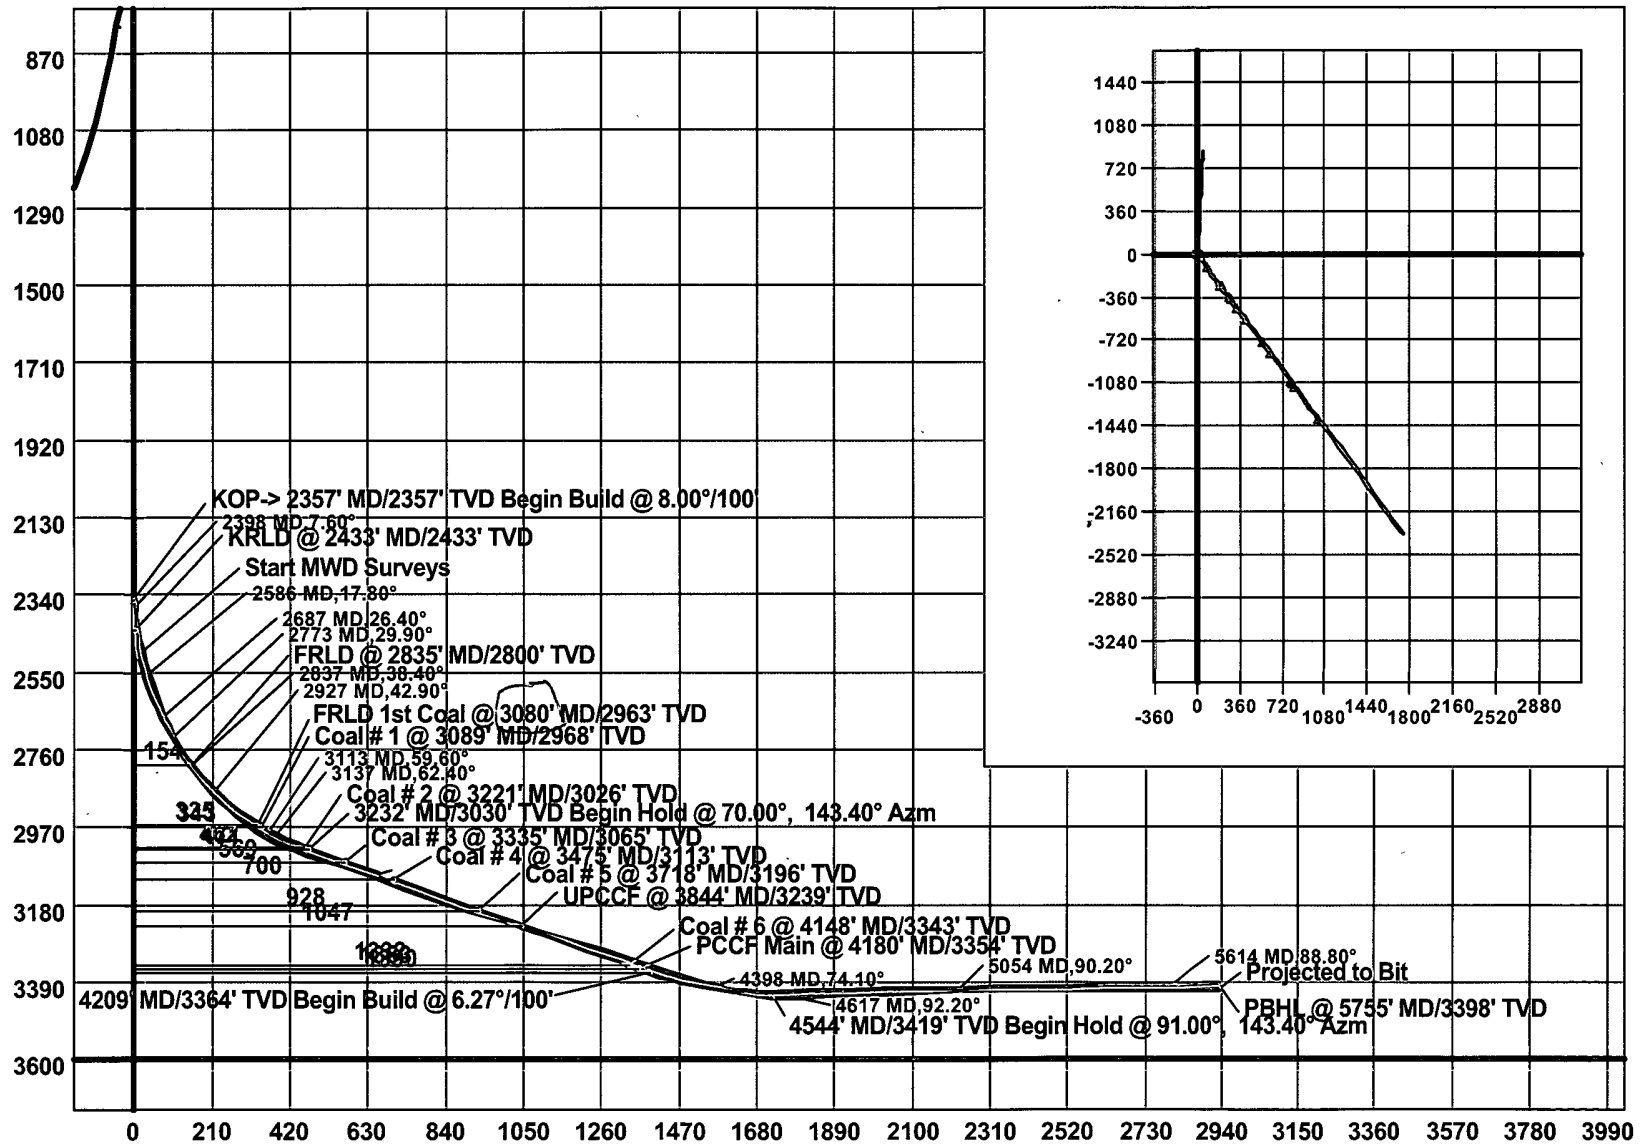

D & J DRILLING, LLC
P. O. BOX 49
FARMINGTON, NM 87499

COPY

DATE: 08/29/08

TO: DEVON ENERGY CORPORATION
P. O. BOX 1678
OKLAHOMA CITY, OK 73101-1678

ATTN: MR. JEFF WILLIFORD

THIS LETTER IS TO CERTIFY THAT D & J DRILLING, DID RUN DEVIATION SURVEYS AT
THE LISTED DEPTH ON YOUR NEBU #255H, IN SEC06-T31N-R06W, IN SAN JUAN COUNTY,
NEW MEXICO. API WELL NUMBER - 30-045-34656

DEPTH	DEGREE DEVIATION
290'	1/4
784'	3/4
1284'	1
1284'	1


RCVD SEP 19 '08

OIL CONS. DIV.

DIST. 3

TO THE BEST OF MY KNOWLEDGE, I SWEAR THIS INFORMATION TO BE TRUE.

STATE OF NEW MEXICO
COUNTY OF SAN JUAN


NOTARY PUBLIC, L. NANETTE RAHM

SINCERELY,


OWNER/PARTNER- CLARENCE D. KEENOM

