District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Ave., Artesia, NM 88210

<u>District III</u> 1000 Rio Brazos Rd., Aztec, NM 87410

<u>District IV</u> 1220 S St. Francis Dr , Santa Fe, NM 87505 State of New Mexico
Energy Minerals and Natural Resources
Department

Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

 $\label{eq:July 21, 2008} \mbox{ July 21, 2008}$ For temporary pits, closed-loop sytems, and below-grade

Form C-144

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application

	<u>Proj</u>	osed Alternative Meth	nod Permit or Closure Plan	Application
	Type of action:	Closure of a pit, closed-le	ted for an existing permitted or non-p	osed alternative method
	Please be advised that approval	of this request does not relieve the opera	individual pit, closed-loop system, be tor of hability should operations result in pollution comply with any other applicable governmental au	
`	ConocoPhillips Compar PO Box 4289, Farmingt		OGRID#:	217817
	r well name: San Iuan 3			

Address: PO Box 4289, Farmington, NM 87499			
Facility or well name: San Juan 30 5 Unit No. 219			
API Number: 30-039-24768	OCD Permit N	lumber:	· · · · · · · · · · · · · · · · · · ·
U/L or Qtr/Qtr: <u>L(NW/SW)</u> Section: <u>16</u> To	ownship: 30N Range:	5W County:	Rio Arriba
Center of Proposed Design: Latitude: 36.8	8094900N Longitude:	107.36674000W	NAD: 1927 X 1983
Surface Owner: Federal X State	Private Tribal Trust or l	Indian Allotment	
2			
Pit: Subsection F or G of 19.15.17.11 NMAC			
Temporary: Drilling Workover			
Permanent Emergency Cavitation P&	ŁΑ		
Lined Unlined Liner type: Thick	kness mil X LLDPE	HDPE PVC	Other
String-Reinforced			
Liner Seams: Welded Factory Other	er Volume:	bbl Dimensions	L x W x D
3 Closed-loop System: Subsection H of 19.15.17	11 NMAC		
	well Workover or Drilling (Appl	hes to activities which requ	ire prior approval of a permit or
,, , , , , , , , , , , , , , , , , , , ,	notice of intent)	•	1 11 1
Drying Pad Above Ground Steel Tanks	Haul-off Bins Other		
	ness mil LLDPE		0.1
Lined Unlined Liner type: Thick		HDPE PVD	Other
Liner Seams: Welded Factory Other		HDE LANT	731-123456
U U "		HDE FOR	031-123456
U U "		HDPE PVO	031-123456
Liner Seams: Welded Factory Other	NMAC	HDPE PVOL	031-123456
Liner Seams: Welded Factory Other Welded Subsection I of 19.15.17.11 N Volume: 120 bbl Type of 19.15.17.11 N	NMAC	HDPE PVO	031-123456
Liner Seams: Welded Factory Other Welded Factory Other Below-grade tank: Subsection I of 19.15.17.11 N Volume: 120 bbl Type of the search Construction material:	NMAC fluid: Produced Water		031-123456
Liner Seams: Welded Factory Other Welded Factory Other	NMAC fluid: Produced Water Metal		7031-123456 RECEIVED SEP. 2005

۶	Fencing: Subsection D of 19 15.17.11 NMAC (Applies to permanent pit, temporary puts, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet X Alternate. Please specify Please see Design Plan						
7	Artist de Dognam						
,	Netting: Subsection E of 19 15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) X Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)						
8							
	Signs: Subsection C of 19.15.17 11 NMAC						
	12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19 15 3.103 NMAC						
9							
	Administrative Approvals and Exceptions:						
	Justifications and/or demonstrations of equivalency are required Please refer to 19 15.17 NMAC for guidance.						
	Please check a box if one or more of the following is requested, if not leave blank:						
	Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for const	deration of ap	proval.				
_	Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.						
10)						
	Siting Criteria (regarding permitting): 19.15 17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.						
	Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells	Yes	XNo				
İ	Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo				
	Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	XNo				
	(Applies to temporary, emergency, or cavitation puts and below-grade tanks)	NA					
	- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
	Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits)	Yes X NA	∐No				
	- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
	Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	XNo				
	- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.						
	Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	XNo				
	 Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes	XNo				
	Within the area overlying a subsurface mine.	Yes	XNo				
	- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division Within an instable area		VINC				
	 Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 	Yes	X No				
	Within a 100-year floodplain - FEMA man	Yes	XNo				

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC						
Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached X Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17 9 NMAC						
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9						
Trychogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.5 X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC						
X Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC						
X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17 12 NMAC						
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19.15.17.13 NMAC						
Previously Approved Design (attach copy of design) API or Permit						
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17 9						
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19 15.17.10 NMAC						
Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC						
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC						
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19.15.17.13 NMAC						
Previously Approved Design (attach copy of design) API						
Previously Approved Operating and Maintenance Plan API						
13						
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC						
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.						
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC						
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC						
Climatological Factors Assessment						
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC						
☐ Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15 17 11 NMAC						
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC						
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC						
Quality Control/Quality Assurance Construction and Installation Plan						
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC						
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15 17.11 NMAC						
Nuisance or Hazardous Odors, including H2S, Prevention Plan						
Emergency Response Plan						
Oil Field Waste Stream Characterization						
Monitoring and Inspection Plan						
☐ Erosion Control Plan ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15 17.13 NMAC						
Closure Fian - based upon the appropriate requirements of Subsection C of 15.15.17.5 WMAC and 15.15 17.15 WMAC						
14 Proposed Closure: 19.15 17.13 NMAC						
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.						
Type. Drilling Workover Emergency Cavitation P&A Permanent Pit X Below-grade Tank Closed-loop System Alternative						
Proposed Closure Method: X Waste Excavation and Removal (Below Grade Tank)						
Waste Removal (Closed-loop systems only)						
On-site Closure Method (only for temporary pits and closed-loop systems)						
In-place Burial On-site Trench						
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)						
15 Waste Excavation and Removal Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of the following items must be attached to the closure plan.						
Please indicate, by a check mark in the box, that the documents are attached.						
X Protocols and Procedures - based upon the appropriate requirements of 19.15 17.13 NMAC						
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)						
X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC						
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC						
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17 13 NMAC						


16						
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19 15.17.13 D NMAC) Instructions Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required						
·						
Disposal Facility Name Disposal Facility Permit #: Disposal Facility Name. Disposal Facility Permit #:						
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations? Yes (If yes, please provide the information No						
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19 15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15.17.13 NMAC						
Siting Criteria (Regarding on-site closure methods only: 19.15 17.10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan Recommendations of acceptable source material are provided below Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval Justifications and/or demonstrations of equivalency are required Please refer to 19 15 17 10 NMAC for guidance						
Ground water is less than 50 feet below the bottom of the buried waste.	Yes No					
- NM Office of the State Engineer - iWATERS database search; USGS: Data obtained from nearby wells	N/A					
Ground water is between 50 and 100 feet below the bottom of the burned waste	☐Yes ☐No					
- NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells						
Ground water is more than 100 feet below the bottom of the buried waste	Yes No					
- NM Office of the State Engineer - iWATERS database search; USGS, Data obtained from nearby wells	∐N/A					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	Yes No					
- Topographic map; Visual inspection (certification) of the proposed site						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo, satellite image	Yes No					
- visual hispection (certification) of the proposed site, Aerial photo, satellite image	□ves □No					
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978. Section 3-27-3, as amended.						
 Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland 	Yes No					
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site						
Within the area overlying a subsurface mine.	☐Yes ☐No					
- Written confiramtion or verification or map from the NM EMNRD-Mining and Mineral Division						
Within an unstable area.	Yes No					
 Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources, USGS; NM Geological Society; Topographic map 						
Within a 100-year floodplain - FEMA map	Yes No					
On-Site Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of the following items must bee attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.						
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC						
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC						
Construction/Design Plan of Temporary Ptt (for in place burial of a drying pad) - based upon the appropriate requirements of 1	9 15 17 11 NMAC					
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC	Z. Z					
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC						
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards ca	nnot be achieved)					
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19 15 17.13 NMAC						
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC						
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15 17 13 NMAC						

Operator Application	Cartification		
Operator Application (I hereby certify that the inf	Certification: formation submitted with this application is true	e, accurate and complete to the	best of my knowledge and belief.
Name (Print):	Ethel Tally	Title Title	Regulatory Technician
Signature:	9thel Tallian	Date:	8-28-08
e-mail address	ethel.tally@conocophillips.com	Telephone	(505)599-4027
- man address		, <u> </u>	(4.17)
OCD Representative S	Permit Application (including closure plan) ignature: Brando So		OCD Conditions (see attachment) Approval Date: 10-7-08
Title: Enc	11 10/spec	OCD Perm	nit Number:
Instructions: Operators ar report is required to be suit		prior to implementing any closi mpletion of the closure activitie. been completed.	re activities and submitting the closure report. The closure s. Please do not complete this section of the form until an e Completion Date:
Closure Method: Waste Excavation If different from a	and Removal On-site Closure Methoproved plan, please explain.	nod Alternative Closure	Method Waste Removal (Closed-loop systems only)
Instructions: Please identi were utilized. Disposal Facility Name Disposal Facility Name Were the closed-loop s	e: e: e: e: expression operations and associated activities perfections.	ls, drilling fluids and drill cutti Disposal Facility Disposal Facility ormed on or in areas that will no	ngs were disposed. Use attachment if more than two facilities Permit Number: Permit Number:
Yes (If yes, please	demonstrate complilane to the items below)	No	
Site Reclamation (Soil Backfilling an	areas which will not be used for future service Photo Documentation) d Cover Installation dication Rates and Seeding Technique	and operations.	
24			
the box, that the docum Proof of Closure Proof of Deed No Plot Plan (for on- Confirmation Sar Waste Material S Disposal Facility Soil Backfilling a Re-vegetation Ap	nents are attached. Notice (surface owner and division) otice (required for on-site closure) site closures and temporary pits) mpling Analytical Results (if applicable) ampling Analytical Results (if applicable) Name and Permit Number and Cover Installation uplication Rates and Seeding Technique (Photo Documentation)	he following items must be atta	ched to the closure report. Please indicate, by a check mark in
			and complete to the best of my knowledge and belief. I also certify that losure plan.
Name (Print):		Title:	
Signature:		Date:	
e-mail address:		Telephone:	

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 30N Range: 05W Sections: 8,9,10,15,16,17,20,21,22
NAD27 X: Y: Zone: Search Radius:
County: Basin: Number: Suffix:
Owner Name: (First) (Last) C Non-Domestic C Domestic
POD / Surface Data Report Avg Depth to Water Report
Water Column Report
Clear Form iWATERS Menu Help
WATER COLUMN REPORT 08/28/2008
(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) POD Number Tws Rng Sec q q q Zone X Y Well Water Columns 20N 05W 17 1 1 2

Record Count: 1

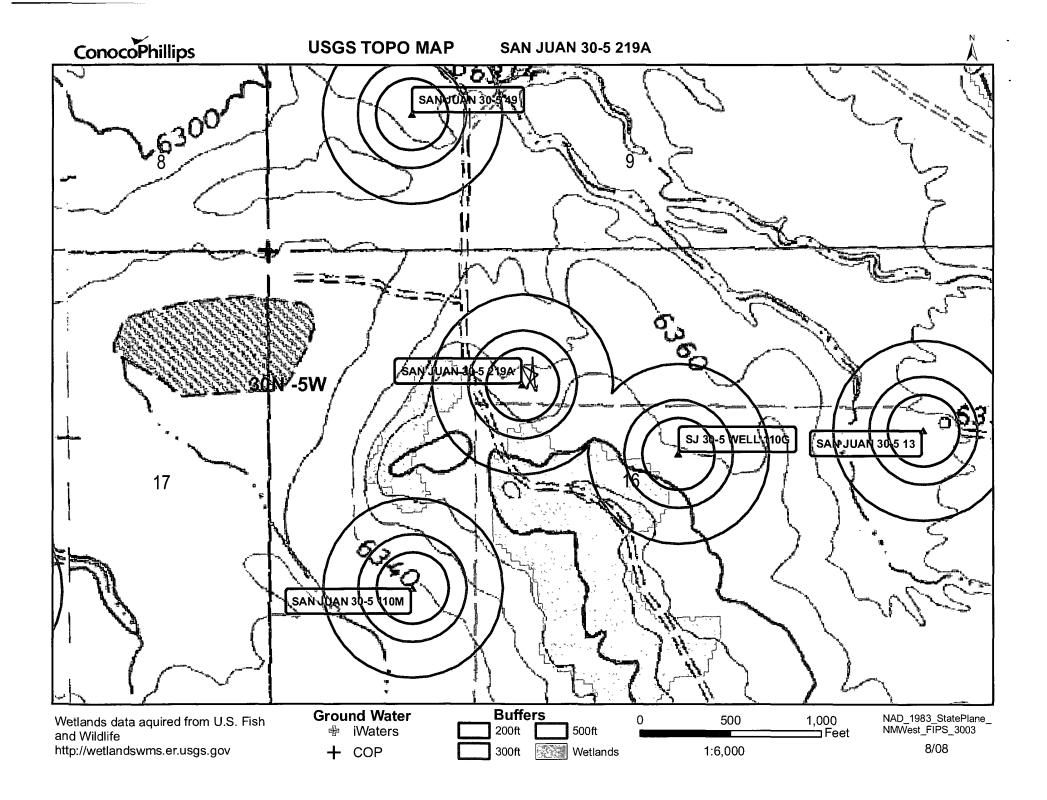

DATA SHEET FOR DEEP BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO

(SUBMIT 2 COPIES TO OCD AZTEC OFFICE)

039-22412

PPCO DESIGNATION: FM-299 OPERATOR: PHILLIPS PETROLEUM COMPANY

FARMINGTON, N.M. 87401

(505) 599-3400

LOCATION: L 16 30 5

LEASE NUMBER: 650262

NAME OF WELL/S OR PIPELINE SERVED: (1) SJ 30-5 UNIT #53 DK

(2) 30-5#219

#5i0

30-039-24768

ELEVATION: NA TOTAL DEPTH:

- 12° 18

COMPLETION DATE: 07/09/82

LAND: STATE

CASING INFO.: SIZE: NA

500 FT.

TYPE: NA

DEPTH: NA

FT. CEMENT USED: NA

IF CEMENT OR BENTONITE PLUGS HAVE BEEN PLACED. SHOW DEPTHS & AMOUNTS:

PLUG DEPTH: NONE PLUG AMOUNT: NONE

WATER INFORMATION:

WATER DEPTH (FT): (1) 90

(2) -0-

WATER INFORMATION: NA

DEPTHS GAS ENCOUNTERED (FT): NA

TYPE AND AMOUNT OF COKE BREEZE USED:

COKE TYPE: METALLURGICAL COKE BREEZE

COKE AMOUNT: 7450 LBS.

DEPTHS ANODES PLACED (FT):

180, 190, 200, 210, 220, 230, 240, 250, 260, 350

DEPTH VENT PIPE PLACED (FT): 500

VENT PIPE PERFORATIONS (FT): TOP 170 BOTTOM 500

REMARKS: -0-

IF ANY OF THE ABOVE DATA IS UNAVAILABLE, PLEASE INDICATE SO. COPIES OF ALL LOGS, INCLUDING DRILLERS LOG, WATER ANALYSIS & WELL BORE SCHEMATICS SHOULD BE SUBMITTED WHEN AVAILABLE. UNPLUGGED ABANDONED WELLS ARE TO BE INCLUDED.

* - LAND TYPE MAY BE SHOWN: F-FEDERAL; I-INDIAN: S-STATE; P-FEE IF FEDERAL OR INDIAN, ADD LEASE NUMBER.

NA-INFORMATION NOT AVAILABLE

FEB21 1992 OIL CON. DIV.

DIST. 3

CC: CP FILE--FARMINGTON

HOUSTON

REPRODUCTION OF "OCD" FORM

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-102 Revised 1-1-89

OIL CONSERVATION DIVISION

P.O. Box 2088

Santa Fe. New Mexico 87504-2088

DISTRICT II P.O. Drawer DD, Artesia, NM 88210


DISTRICT I P.O. Box 1980, Hobbs, NM 88240

DISTRICT III
1000 Rio Brazos Rd., Aziec, NM 87410

... WELL LOCATION AND ACREAGE DEDICATION PLAT


All Distances must be from the outer boundaries of the section


Opera	lor					Lease				Well No.	_
	PH	{ LL	PS PET	ROLEUM		SAN	JUAN	30-5	UNIT	21	9
Unit 1	etter	Section	16	Township T.30	N.	Range	R.5 W.	NM	RIO AF	RRIBA C	COUNTY
Actua	Footge Loca 1586	leet fro	•	SOUTH	line and	13	04		om the WEST	line	
Groun	d level Elev.	1		Formation	. 	Pool				Dedicated Ac	reage:
	6344			uitland				and Coa	1	320	Acres
	1. Outline	the acre	age dedicated	it below.							
	2. If more than one lease is dedicated to the well, outline each and identify the ownership thereof (both as to working interest and royalty).										
	3. If more than one lease of different ownership is dedicated to the well, have the interest of all owners been consolidated by communitization,										
	ແກ່ຜ່ຽນໄ	ion, force Yes	e-pooling, etc.	? No If ans	wer is "ves" (vo	e of consolidation	n Uni	tizatio	า		
	il sozmet :	is "no" li	ist the owners	and tract description	ons which have	actually been co					
	this form i	if necces	CRTY.						ion, forced-pooling	- Chemical	
	or until a s	DOG-STADO	se assigned to lard unit, elim	inating such intere	st, has been app	roved by the Di	viskon.			, a aki vise)	
4			<i></i>	1			 _		OPERATO	OR CERTIF	TCATION
1			E-347-	-40		ì		j			the information
			Tract	17A		i			best of my browle		
Ý			80 Acr	res	/	j		1			
1			i	1		· P m i	3 W P		Signature	1	0
1		7	j	j	10		INE		0711	Cand	u
			ì	Į.	/ 1/1	į		U	Printed Name	1	
个:			<u>`</u>			MAY2	2 1990		L. M. San	ders	
1			E-347-	41		1		1	Supv. Reg	ulatory	Affaire
			Tract		(OIL CO	N. DI	/	Company		1111111
1			80 Acr	L	,		T. 3		Phillips	Petroleu	m Co.
1			1 oo her	5 1		- 7	•		Date	1-	
			1			ĺ		i	5/2/	190_	
		~	12	SEC.	/16	<u> </u>			SURVEY	OR CERTIF	ICATION
1		7	E-347-	30		j			I hereby certify	that the well	location shown
ė			Tract			ĺ			on this plat wa		
5280.00			160 Ac			1		İ	actual surveys supervison, and		
द्धि]		1		1	correct to the		
	1304	_	1	ł		1			belief.		
		 -	1			į			Date Surveyed	18000	
/	7		<u></u>			<u>+</u>		 		وووم، بق	De
l	r			, 1		Į		1	Signature & Sell Professional Sun	EXON HE X/C	7.7
ш		ī0		1	•			ł	R. HOWA	DIVIDACI	0)6
00-01		586		X		- [1		14 P679	E''121
18				1		!		}	POR		30 BACK
z				j		ļ			11.//	Long "	136
	N 89-45	Ε	5267.	.46'	,	1		}		POFESSION	
	/_							===	9 Regi	679	resional
	10 660 0	7	10 1/50 1	000 2310 2640	2000	1500	1000 4	SOO 0		Land Serve	

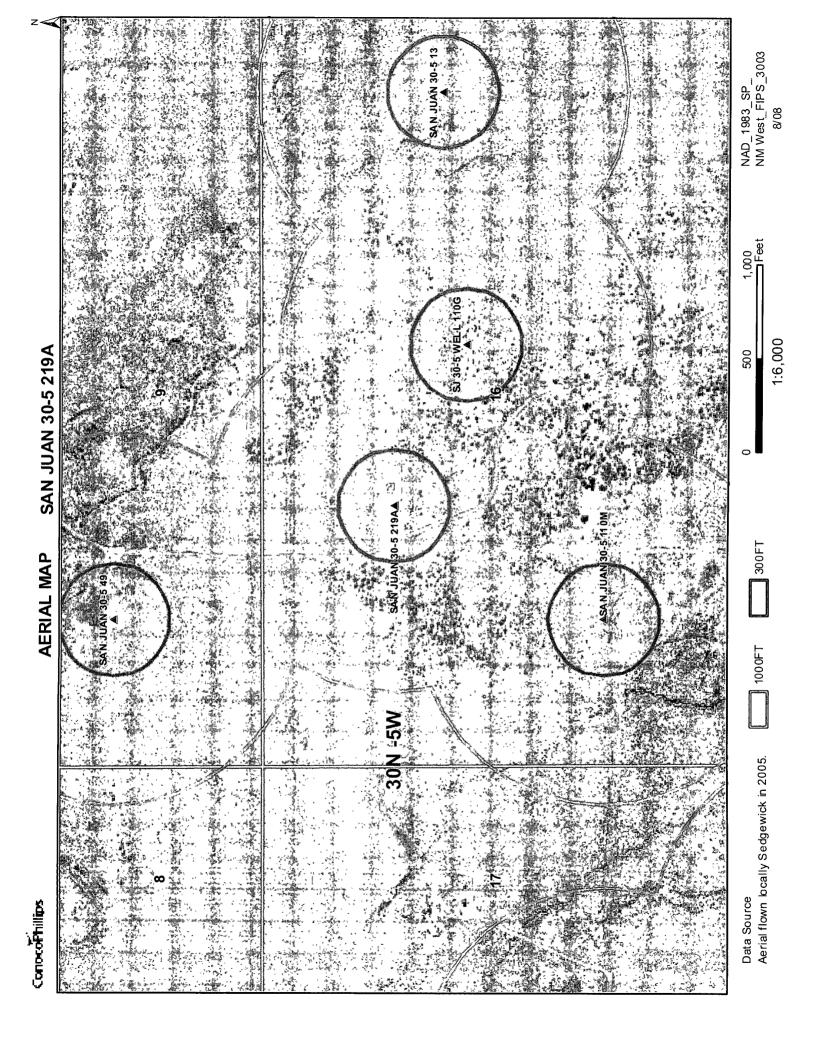


San Juan 30 5 Unit 219 / Mines, Mills and Quarries Web Map



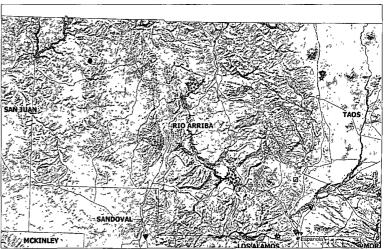





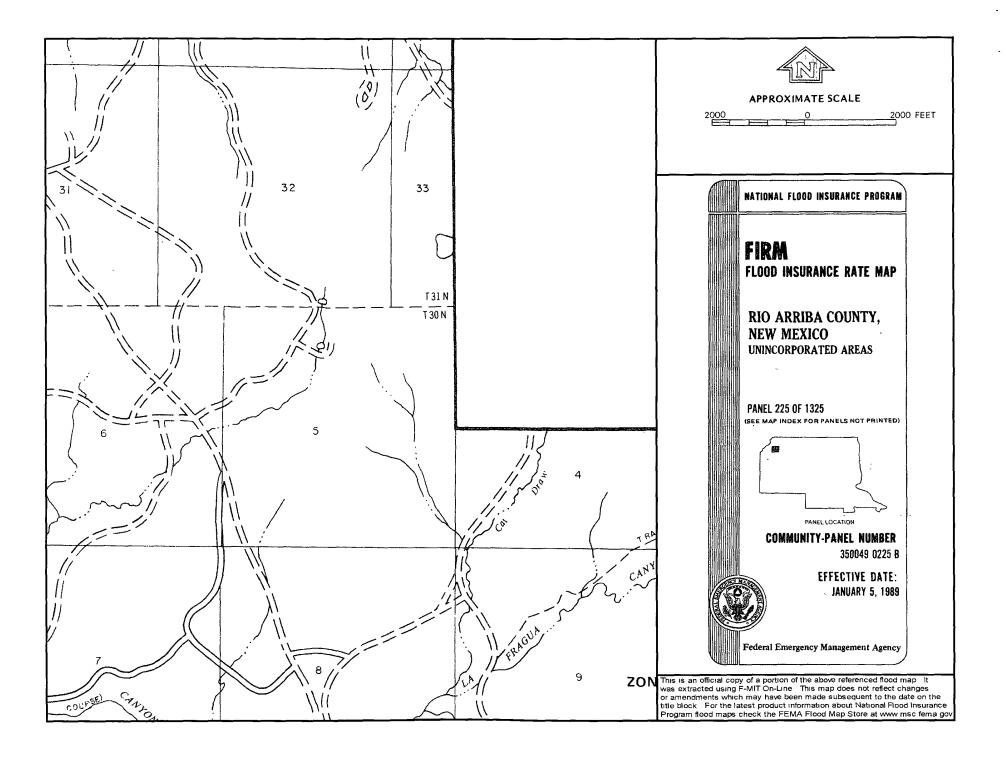

Hydrogeological report for San Juan 30-5 219 CDP

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

ConocoPhillips Company San Juan Basin Below Grade Tank Design and Construction


In accordance with NMAC 19.15.17 the following information describes the design and construction of below grade tanks on ConocoPhillips Company locations hereinafter known as COPC locations. This is COPC standard procedure for all below grade tanks (BGT). A separate plan will be submitted for any BGT which does not conform to this plan.

General Plan;

- 1. COPC will design and construct a BGT to contain liquids and to prevent contamination of fresh water and protect public health and environment.
- 2. COPC will use the general location sign posted on location. If no general sign is posted a separate sign at the location of the BGT will be provided.
- 3. COPC shall construct fencing around the BGT using 4 foot hog wire fencing topped with two strands of barbed wire, or with a pipe top rail. A six foot chain link fence topped with three strands of barbed wire will be use if the well location is within 1000 feet of permanent residence, school, hospital, institution or church.
- 4. COPC will construct a expanded metal covering on the top of the BGT
- 5. COPC shall ensure that a below-grade tank is constructed of materials resistant to the below-grade tank's particular contents and resistant to damage from sunlight.
- 6. The COPC below-grade tank system shall have a properly constructed foundation consisting of a level base free of rocks, debris, sharp edges or irregularities to prevent punctures, cracks or indentations of the liner or tank bottom.
- 7. COPC shall construct a below-grade tank to prevent overflow and the collection of surface water run-on.
- 8. COPC will construct and use a below-grade tank that does not have double walls. The below-grade tank's side walls will be open for visual inspection for leaks, the below-grade tank's bottom is elevated a minimum of six inches above the underlying ground surface and the below-grade tank is underlain with a geomembrane liner to divert leaked liquid to a location that can be visually inspected.
- COPC shall equip below-grade tanks designed in this manner with a properly operating automatic high-level shut-off control device and manual controls to prevent overflows.
- 10. The geomembrane liner shall consist of 30-mil flexible PVC or 60-mil HDPE liner, or an equivalent liner material that the appropriate division district office approves. The geomembrane liner shall have a hydraulic conductivity no greater

than 1 x 10-9 cm/sec. The geomembrane liner shall be composed of an impervious, synthetic material that is resistant to petroleum hydrocarbons, salts and acidic and alkaline solutions. The liner material shall be resistant to ultraviolet light. Liner compatibility shall comply with EPA SW-846 method 9090A.

11. The general specification for design and construction are attached in the COPC document.

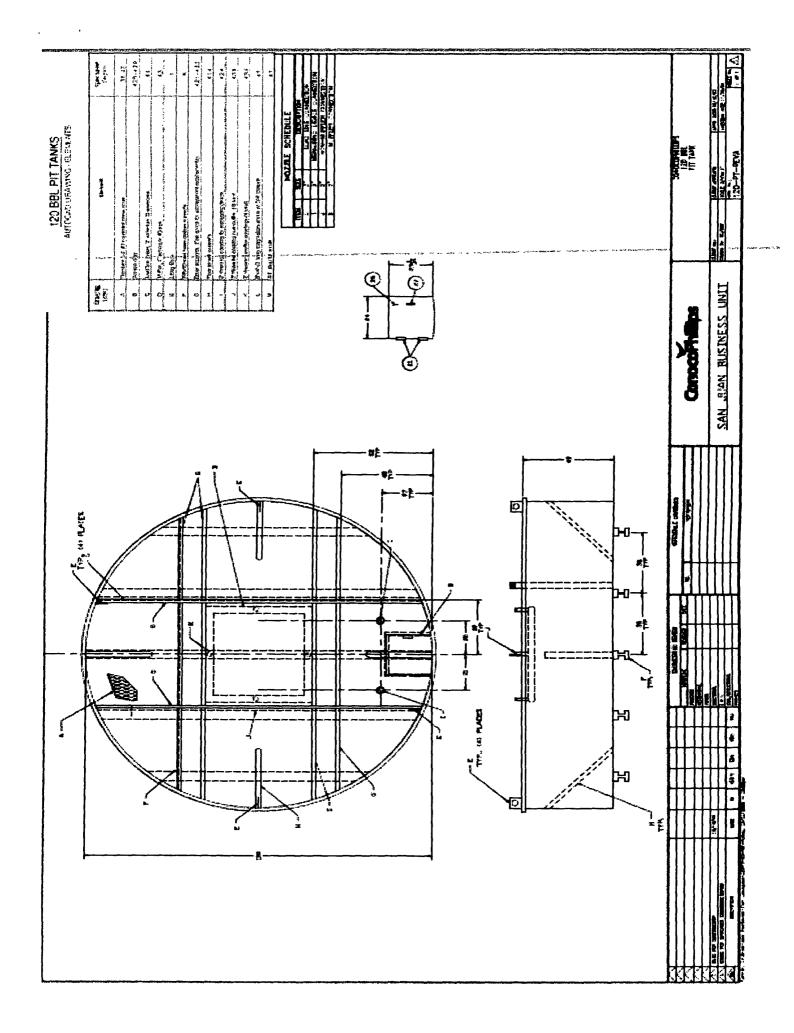

ConocoPhillips Company San Juan Basin Below Grade Tank Maintenance and Operating Plan

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of Below Grade Pit (BGT) on ConocoPhillips Company locations hereinafter known as COPC locations. This is COPC's standard procedure for all BGT. A separate plan will be submitted for any BGT which does not conform to this plan.

General Plan:

- 1. COPC will operate and maintain a BGT to contain liquids and solids and prevent contamination of fresh water and protect public health and environment.
- 2. COPC shall not allow a below-grade tank to overflow or allow surface water runon to enter the below-grade tank.
- 3. COPC shall continuously remove any visible or measurable layer of oil from the fluid surface of a below-grade tank in an effort to prevent significant accumulation of oil overtime.
- 4. COPC shall inspect the below-grade tank at least monthly and maintain a written record of each inspection for five years.
- 5. COPC shall maintain adequate freeboard to prevent overtopping of the below-grade tank.

ConocoPhillips Company San Juan Basin Below Grade Tank Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of Below Grade Tanks (BGTs) on ConocoPhillips Company locations hereinafter known as COPC locations. This is COPC's standard procedure for all BGTs. A separate plan will be submitted for any BGT which does not conform to this plan.

General Requirements:

- COPC shall close a below-grade tank within the time periods provided in 19.15.17.13 NMAC, or by an earlier date that the division requires because of imminent danger to fresh water, public health or the environment.
- 2. COPC shall close an existing below-grade tank that does not meet the requirements of Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC or is not included in Paragraph (5) of Subsection I of 19.15.17.11 NMAC within five years after June 16, 2008, if not retrofitted to comply with Paragraphs (1) through (4) of Subsection I of 19.15.17.11 NMAC.
- COPC shall close a permitted below-grade tank within 60 days of cessation of the below-grade tank's operation or as required by the transitional provisions of Subsection B of 19.15.17.17 NMAC in accordance with a closure plan that the appropriate division district office approves. The closure report will be filed on C-144
- COPC shall remove liquids and sludge from a below-grade tank prior to implementing a closure method and shall dispose of the liquids and sludge in a division-approved facility.
- 5. COPC shall remove the below-grade tank and dispose of it in a divisionapproved facility or recycle, reuse, or reclaim it in a manner that the appropriate division district office approves.
- 6. If there is any on-site equipment associated with a below-grade tank, then COPC shall remove the equipment, unless the equipment is required for some other purpose.
- 7. COPC shall test the soils beneath the below-grade tank to determine whether a release has occurred. COPC shall collect, at a minimum, a five point, composite sample; collect individual grab samples from any area that is wet, discolored or showing other evidence of a release; and analyze for BTEX, TPH and chlorides to demonstrate that the benzene concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 0.2 mg/kg; total BTEX concentration, as determined by EPA SW-846 methods 8021B or 8260B or other EPA method that the division approves, does not exceed 50 mg/kg; the TPH concentration, as determined by EPA method 418.1 or other EPA method that the division approves, does not exceed 100

mg/kg; and the chloride concentration, as determined by EPA method 300.1 or other EPA method that the division approves, does not exceed 250 mg/kg, or the background concentration, whichever is greater. COPC shall notify the division of its results on form C-141.

- 8. If COPC or the division determines that a release has occurred, then COPC shall comply with 19.15.3.116 NMAC and 19.15.1.19 NMAC, as appropriate.
- If contamination is confirmed by field sampling. COPC will follow the Guidelines
 For Remediation Of Leaks, Spills, and Releases NMOCD August 1993 when
 remediating contaminants identified
- 10. If the sampling program demonstrates that a release has not occurred or that any release does not exceed the concentrations specified in Paragraph (4) of Subsection E of 19.15.17.13 NMAC, then COPC shall backfill the excavation with compacted, non-waste containing, earthen material; construct a division-prescribed soil cover; recontour and re-vegetate the site.
- 11. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 12. All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of the below-grade tank. Closure report will be filed on C-144 and incorporate the following:
 - Details on Capping and Covering, where applicable.
 - Sampling Results
- 13. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 14. COPC shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

- 15. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater.
- 16. The surface owner shall be notified of COPC's closing of the below-grade tank as per the approved closure plan using certified mail, return receipt requested.