State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division Form C-144 July 21, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

District II 1301 W. Grand Ave , Artesia, NM 88210

District III	1220 South St. Francis Dr.	
1000 Rio Biazos Rd., Aztec, NM 87410	Santa Fe, NM 87505	For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the
District IV 1220 S. St. Francis Dr., Santa Fe, NM 87505		appropriate NMOCD District Office
	ed-Loop System, Below-Grade	Tank or
	rnative Method Permit or Closi	
Troposed Tittel	TRACTIVE TYTE THE CT	are Train rippineation
Type of action: Permit o	f a pit, closed-loop system, below-grade tar	nk, or proposed alternative method
Closure	of a pit, closed-loop system, below-grade ta	ank, or proposed alternative method
Modifica	ation to an existing permit	
—		ed or non-permitted pit, closed-loop system,
•	rade tank, or proposed alternative method	
Instructions: Please submit one application (Fe	orm C-144) per individual pit, closed-loop	system, below-grade tank or alternative request
	s not relieve the operator of liability should operations res of its responsibility to comply with any other applicable g	•
Ti	This responsibility to comply with any other applicable g	overnmental audiomy's tures, regulations of ordinances
Operator: Burlington Resources Oil & Gas Com	pany, LP	OGRID#: 14538
Address: PO Box 4289, Farmington, NM 87499)	
Facility or well name: Scott 103S		
API Number: 30-045-34557	OCD Permit Number	:
U/L or Qtr/Qtr: J(NW/SE) Section: 12	Township: 30N Range: 12	2W County: San Juan
Center of Proposed Design: Latitude: 36	6.82391100°N Longitude:	108.04693700°W NAD: X 1927 1983
Surface Owner: Federal State	X Private Tribal Trust or Indian	Allotment
2 X Pit: Subsection F or G of 19.15.17.11 NMAC		
Temporary: X Drilling Workover		
	P&A	
	· — —	HDPE PVC Other
X String-Reinforced		
	Other Volume: 4400	bbl Dimensions L 65' x W 45' x D 10'
Eller Scallis. A Wellett A Tactory	volume. 4400	Differences E 43 X W 43 X D 10
3	12.11.00.1.0	
Closed-loop System: Subsection H of 19.15. Type of Operation: P&A Drulling a new		activities which require prior approval of a permit or
Type of Operation.	notice of intent)	ictivities which require prior approval or a permit of
Drying Pad Above Ground Steel Tanks	Haul-off Bins Other	
		DPE PVD Other
Liner Seams: Welded Factory Oth	ner	
Below-grade tank: Subsection I of 19.15.17.11	I NMAC	
Volume: bbl Type	of fluid:	
Tank Construction material:		
Secondary containment with leak detection	Visible sidewalls, liner, 6-inch lift and autor	matic overflow shut-off
Visible sidewalls and liner Visible	sidewalls only Other	
Liner Type: Thickness mil	HDPE PVC Other	
5		
Alternative Method:		
Submittal of an exception request is required. Excepti	ons must be submitted to the Santa Fe Environ	mental Bureau office for consideration of approval.
· · · · · · · · · · · · · · · · · · ·		

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, inst Four foot height, four strands of barbed wire evenly spaced between one and four feet X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.	stution or chur	rch)
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)		
8 Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers Signed in compliance with 19.15.3.103 NMAC		
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19.15.17 NMAC for guidance Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval	ideration of ap	proval
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - 1WATERS database search; USGS; Data obtained from nearby wells	Yes	XNo
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks)	☐Yes ☐NA	XNo
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits)	Yes XNA	No
 Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. 	Yes	XNo
- NM Office of the State Engineer - 1WATERS database search; Visual inspection (certification) of the proposed site. Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	XNo
 Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes	XNo
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	XNo
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes	X No
Within a 100-year floodplain - FEMA map	Yes	XNo

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15.17.9 NMAC
X Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
X Design Plan - based upon the appropriate requirements of 19.15 17 11 NMAC
X Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17 12 NMAC
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of
19.15 17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API
12 Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17 9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19 15.17 9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17.12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19.15.17.13 NMAC
14
Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type. X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
Proposed Closure Method: X Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
On-site Closure Method (only for temporary pits and closed-loop systems)
In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19 15 17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.
X Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
X Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
X Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Form C-144 Oil Conscivation Division

Page 3 of 5

16 . Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel T.	anks or Haul-off Bins Only: (19.15 17 13.D NMAC)							
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluit are required.	ds and drill cuttings Use attachment if more than two fa	cilities						
•	sposal Facility Permit #:							
	usposal Facility Permit #:							
	Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations?							
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specification - based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection	n I of 19 15.17.13 NMAC							
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan Recocertain viting criteria may require administrative approval from the appropriate district office or in for consideration of approval Justifications and/or demonstrations of equivalency are required.	ay be considered an exception which must be submitted to the S							
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - tWATERS database search; USGS: Data obtaine	d from nearby wells	Yes No						
Ground water is between 50 and 100 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained	l from nearby wells	Yes No						
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained	I from nearby wells	Yes No						
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant (measured from the ordinary high-water mark).	watercourse or lakebed, sinkhole, or playa lake	Yes No						
- Topographic map; Visual inspection (certification) of the proposed site								
Within 300 feet from a permanent residence, school, hospital, institution, or church in exis - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	tence at the time of initial application.	Yes No						
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than fi purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification)	e at the time of the initial application	YesNo						
Within incorporated municipal boundaries or within a defined municipal fresh water well pursuant to NMSA 1978, Section 3-27-3, as amended.	field covered under a municipal ordinance adopted	Yes No						
- Written confirmation or verification from the municipality, Written approval obtaine Within 500 feet of a wetland		Yes No						
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspects Within the area overlying a subsurface mine.		Yes No						
- Written confirantion or verification or map from the NM EMNRD-Mining and Mine Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Miner		Yes No						
Topographic map Within a 100-year floodplain. - FEMA map		Yes No						
18 On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of t	the following items must be attrached to the electric	n plan Plages indicate						
by a check mark in the box, that the documents are attached.	•	,						
Siting Criteria Compliance Demonstrations - based upon the appropriate re								
Proof of Surface Owner Notice - based upon the appropriate requirements of	of Subsection F of 19.15.17.13 NMAC							
Construction/Design Plan of Burial Trench (if applicable) based upon the a	••••							
Construction/Design Plan of Temporary Ptt (for in place burial of a drying Protocols and Procedures - based upon the appropriate requirements of 19.		9.15.17.11 NMAC						
Confirmation Sampling Plan (if applicable) - based upon the appropriate re-								
Waste Material Sampling Plan - based upon the appropriate requirements o								
Disposal Facility Name and Permit Number (for liquids, drilling fluids and		not be achieved)						
Soil Cover Design - based upon the appropriate requirements of Subsection								
Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection								
	-							

			·····	
19	Ctigti			
Operator Application		anneste and complete to th	a heat of my Imageladae and haltof	
• •	nformation submitted with this application is true, ac			
Name (Print)	Ethel Tally	Title	Staff Regulatory Technician	
Signature	7 Tally	Date	9-24-08	
e-mail address:	Ethel Tally@ConocoPhillips com	Telephone:	505-599-4027	
c-man address.	Ethor Fany & Concest Things Com		332 377 1387	A A A C C T
			·	
20 OCD A	Permit Application (including closure plan)	Closura Blan (only	OCD Conditions (see attacl	amont)
OCD Approval:	Permit Application (including closure plan)	Closure Plan (only) UGCD Conditions (see attact	intent)
OCD Representative	Signature:		Approval Date:	10-14-08
-	- May O ser		pp.ova. 24tev	70 11-0 a
Title: E	inviro / spec	OCD Per	mit Number:	
21				
Closure Report (requ	nired within 60 days of closure completion); s	Subsection K of 19 15 17 13 NM	AC	
	are required to obtain an approved closure plan prio			re report. The closure
• •	submitted to the division within 60 days of the comple	-	es. Please do not complete this section	n of the form until an
approved closure plan h	as been obtained and the closure activities have beer	n completed.		
		Closu	re Completion Date:	
22				
Closure Method:	<u>_</u>	_	_	
Waste Excavation	on and Removal On-site Closure Method	Alternative Closur	e Method Waste Removal (Clo	sed-loop systems only)
If different from	approved plan, please explain.			
23				
	ling Waste Removal Closure For Closed-loop Systems			
instructions: Please ide. were utilized.	ntify the facility or facilities for where the liquids, d	trilling fluids and arill cul	tings were disposed. Use attachment	if more than two facilities
	ma.	Durnosal Facili	ty Darmit Number	
Disposal Facility Nar		-	ty Permit Number.	
Disposal Facility Nai			ty Permit Number:	
Were the closed-loop	system operations and associated activities performe	ed on or in areas that will i	not be used for future service and oper	artions?
Yes (If yes, pleas	se demonstrate complilane to the items below)	No		
Required for impacte	ed areas which will not be used for future service and	l operations:		
Site Reclamation	n (Photo Documentation)			
Soil Backfilling	and Cover Installation			
Re-vegetation A	pplication Rates and Seeding Technique			
24	and the second second			
	ttachment Checklist: Instructions: Each of the f	following items must be ai	tached to the closure report. Please i	ndicate, by a check mark in
	ruments are attached.			
	re Notice (surface owner and division)			
=	Notice (required for on-site closure)			
☐ Plot Plan (for o	on-site closures and temporary pits)			
Confirmation S	Sampling Analytical Results (if applicable)			
=	Sampling Analytical Results (if applicable)			
H	ty Name and Permit Number			
	· ·			
=	g and Cover Installation			
	Application Rates and Seeding Technique			
Site Reclamati	on (Photo Documentation)			
On-site Closur	e Location: Latitude:	Longitude:	NAD	927 1983
25	andiff andi and			
Operator Closure Co	<u> </u>			
	information and attachments submitted with this close	•		leage and belief. I also certify that
ine ciosure complies wit	th all applicable closure requirements and conditions	s specifiea in the approved	ctosure pian.	
Name (Print):		Title:		
		-		
Signature:		Date:		
		<u> </u>		
e-mail address		Telephone		

Form C-144 Oil Conservation Division Page 5 of 5

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 30N	Range: 12W	Sections: 1,2	2,11,12,1	3,14	1
NAD27 X:	Y:	Zone:		Search Radius:	
County:	Basin:			Number:	Suffix:
Owner Name: (First)	(L	ast) ② All	-	O Non-Domestic	ODomestic
POD / S	ourface Data Repor	ter Column Repor		to Water Report	3
	Clear Form	iWATERS Me	enu 💴	Help	

WATER COLUMN REPORT 09/22/2008

· -							3=SW 4=SE	•				
	arter						smallest)		Depth	Depth	Wat∈
POD Number	Tws		Sec			đ	Zone	x	Y	Well	Water	Colum
SJ 02643	30N	12W		3	3	2				195	140	Ē
SJ 02707	30N	12W		3	4	3				235	135	10
SJ 00142	30N	12W		4	4	2				192	122	7
SJ 00651	30N	12W		4	4	4				193	123	7
SJ 03129	30N	12W		3	4	2				44	35	
SJ 03027	30N	12W		3	4	3				100		
SJ 00384	30M	12W		4	3	2				57	20	3
SJ 03020	30N	12W		4	3	4				52	30	2
SJ 00643	30N	12W		4	-					75	51	2
SJ 03757 POD1	30N	12W		4			266	123	2118278	22	12	1
SJ 00322	30N	12W		4	4	1				66	40	2
SJ 00888	30N	12W		1						81	50	3
SJ 00935	30N	12W		1						54	10	Ĺ
SJ 00518	30N	12W		1						55	15	Ţ
SJ 00316	30N	12W			1					56	30	2
SJ 00337	30N	12W			1					43	17	2
<u>SJ 00773</u>	30N	12W			1	1				68	50	1
SJ 00821	30N	12W			3					42	15	2
SJ 03063	30N	12W		1	-	1				40	25	1
SJ 02803	30N	12W		2	_	2				68	43	2
SJ 01403	30M	12W		2	2	4				51	15	3
SJ 02114	30N	12W		2	2	4	1			49		
SJ 01773	30N	12W	13	3						60	25	3
SJ 00299	30N	12W	13	3	2					49	18	3
SJ 00123	30N	12W	14	1	1	1				60	38	2
SJ 00854	30N	12W	14	1	4					87	50	3
SJ 00667	30N	12W	14	2	2	4				60	45	1
SJ 01161	30N	12W	14	2	4					37	20	1

SJ	00105	30N	12W 14	3	1		38	25	1
SJ	00596	30N	12W 14	3	1		72	26	Ļ
SJ	00735	30N	12W 14	3	1	3	50	30	2
SJ	00676	30N	12W 14	3	2		51	30	2
SJ	00574	30N	12W 14	3	2		72	50	2
SJ	03318	30N	12W 14	3	3	4	50		
SJ	00107	30N	12W 14	3	4		50	15	3
SJ	01674	30N	12W 14	3	4		65	16	Ĺ
SJ	00129	30N	12W 14	3	4		50	10	Ž
SJ	00124	30N	12W 14	3	4		55	10	4
SJ	00271	30N	12W 14	3	4	1	43	23	2
SJ	00508	30N	12W 14	3	4	2	45	6	3
SJ	00458	30N	12W 14	4	1		37	15	2
<u>S</u> J	03472	30N	12W 14	4	2	1	60	8	Ē
SJ	02739	30N	12W 14	4	2	2	65	10	Ē
SJ	03643	30N	12W 14	4	2	4	40	15	2
SJ	00482	30N	12W 14	4	3		43	6	3
SJ	00290	30N	12W 14	4	3		39	8	3

Record Count: 46

New Mexico Office of the State Engineer POD Reports and Downloads


Township: 30N	Range: 11W	Sections: 6,7,	18	•
NAD27 X:	Y:	Zone:	Search Radius:	
County:	Basin:		Number:	Suffix:
Owner Name: (First)	La (La	st)	○ Non-Domestic	ODomestic
POD / Su	rface Data Report Wate	Avg	Depth to Water Report	-
(Clear Form	iWATERS Mei	nu	

WATER COLUMN REPORT 09/22/2008

(qu	arters	are	e 1=1	W	2=	=NE	3=SW 4	=SE)				
(qu	arters	are	e big	ge	est	to:	small	est)		Depth	Depth	Wat∈
POD Number	Tws	Rng	Sec	q	q	q	Zone	х	Y	Well	Water	Colum
SJ 03245	30N	11W	06	4	4	4				80	65	1
SJ 02194	30N	11W								59	22	3
SJ 02140	30N	11W	07	1	1	1				70	60	1
SJ 00688	30N	11W		1	_	3				70	58	1
SJ 00882	30N	11W	07	1	4	3				60	50	1
SJ 00690	30N	11W		1	4	3				60		
SJ 00889	30N	11W	07	1	4	3				55		
SJ 00387	30N	11W	07	1	4	3						
SJ 00739	30N	11W		1	4	3				70	58	1
SJ 00748	30N	11W		1	4	3				60	41	1
SJ 00415	30N	11W		1	4	3				53	40	1
SJ 00389	30N	11W		1	4	3				53		
SJ 00689	30N	11W		1	4	3				78	65	1
SJ 00358	30N	11W		1	4	3				61	38	2
SJ 00397	30N	11W		1	4	3				56	35	2
SJ 00806	30N	11W		1	4	3				38	20	1
SJ 03271	30N	11W		2	3	2						_
SJ 01475	30N	11W		2	3	3				49	27	2
SJ 03465	30N	11W		2	3	4				80		
SJ 00259	30N	11W		2	4					25	12	1
SJ 01492	30N	11W		3						60	22	3
SJ 03794 POD1	30N	11W	07	3	_	3		266272	2119520	44	27	1
SJ 01172	30N	11W	07	3	2					50	30	2
SJ 01310	30N	11W	07	3	3					80	50	3
SJ 01484	30N	11W	07	3	3					61	10	Ē
SJ 03630	30N	11W		3	3	3				68	24	٤
SJ 01425	30N	11W	07	3	4					55	25	3
SJ 01468	30N	11W	07	3	4					60	25	3

GT 02006	2.037	1111 0	, .		0				5 0	0.4	•
SJ 02006	30N	11W 0'							50	24	2
SJ 03484	30N	11W 0							75	0.0	
SJ 02715	30N	11W 0							68	20	Ļ
SJ 02005	30N	11W 0							55	20	:
SJ 00769	30N	11W 0							50	14	4 3 3 3
SJ 01406	30N	11W 0'		1					45	12	3
SJ 00135	30N	11W 0		1					180	23	15
SJ 02936	30N	11W 0							38	30	
SJ 00679	30N	11W 0			3				48	22	2
SJ 00162	30N	11W 0							58	23	3
SJ 00329	30N	11W 0'			3				63	20	Ĺ
SJ 00620	30N	11W 0			3				52	35	1
SJ 02906	30N	11W 0			4				45	24	2
SJ 00893	30N	11W 0		2					80	40	Ĺ
SJ 01667	30N	11W 0							41	21	2
SJ 01404	3011	11W 0							40	15	2
SJ 00604	30N	11W 0		3					38	22	1
SJ 00920	3 0 N	11W 0'		_					35	12	2
SJ 00919	30N	11W 0		_					35	12	2
SJ 00918	30N	11W 0							35	14	2
SJ 00601	30N	11W 0							40	22	1
SJ 01567	30N	11W 0							35	14	2
SJ 01316	30N	11W 18		. 1					46	12	3 3
SJ 03152	30N	11W 18		. 1					52	22 .	
SJ 03215	30N	11W 18			3				52	9	Ĺ
SJ 02996	30N	11W 18							50	25	2
SJ 03463	30N	11W 18		. 2					70	20	Ē
SJ 02805	30N	11W 18		. 2					60		
SJ 00932	30N	11W 18		. 2	4				32	15	1
SJ 01738	30N	11W 18		. 3					33	6	2
SJ 01733	30N	11W 18	3 1	. 3					29	9	2
SJ 01401	30N	11W 18		. 3					44	12	3
SJ 01786	30N	11W 18		. 3					35	10	2
SJ 03526	30N	11W 18		. 3					40		
SJ 03176	30N	11W 18	3 1	. 4	1	,			48	20	2
SJ 03344	30N	11W 18	3 1	. 4	2				100	8	č
SJ 03177	30N	11W 18	3 1	. 4	2				37	15	2
SJ 03801 POD1	30N	11W 18	3 2	2			266702	2116449	21	6	1
SJ 03800 POD1	30N	11W 18		2			266718	2116651	21	6	1
SJ 01639	30N	11W 18	3 2	2	2				40	18	2
SJ 02123	30N	11W 18	3 2	4					22	8	1
SJ 02109	30N	11W 18							19	4	_ 1
SJ 02098	30N	11W 18	3 2	4					21	7	1
SJ 03290	30N	11W 18	3 2	4	4				40	10	3
SJ 02045	30N	11W 18		Ļ					480	200	28
SJ 03322	30N	11W 18			1			,	40	10	3
SJ 03321	30N	11W 18			3				80		
SJ 03320	30N	11W 18	3 4	4	3				80		

Record Count: 76

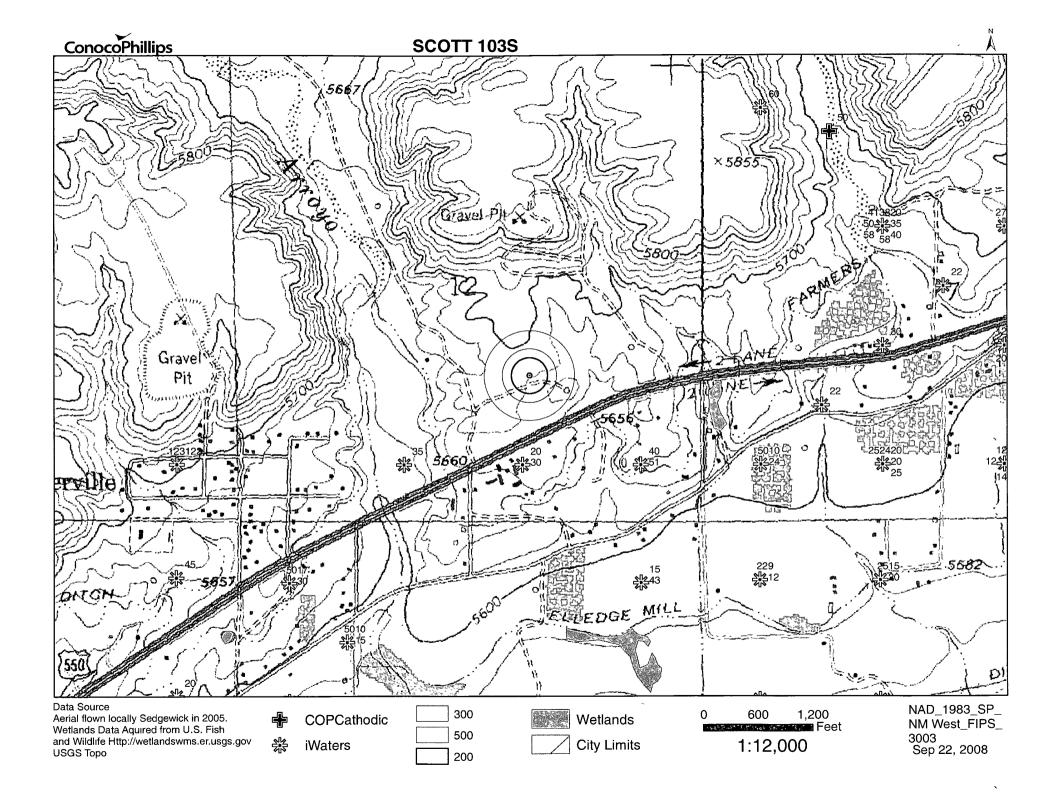

ConocoPhillips **AERIAL MAP SCOTT 103S** SCOTT 103S 30N 42W 30N -11W Data Source NAD_1983_SP_ NM West_FIPS_

Aerial flown locally Sedgewick in 2005.
Wetlands Data Aquired from U.S. Fish
and Wildlife Http://wetlandswms.er.usgs gov
USGS Topo

300Ft 1000Ft.


1:10,000


0 250 500

3003 Aug 26, 2008


Scott 103S/Mines, Mills and Quarries Web Map

Mines, Mills	& Quarries Commodity Groups
Δ	Aggregate & Stone Mines
•	Coal Mines
*	Industrial Minerals Mines
•	Industrial Minerals Mills
	Metal Mines and Mill Concentrate
3 4	Potash Mines & Refineries
resi	Smelters & Refinery Ops.
*	Uranium Mines
•	Uranium Mills
Population	
@	Cities - major
Transportation	on
I -	Railways
	• • • • • •

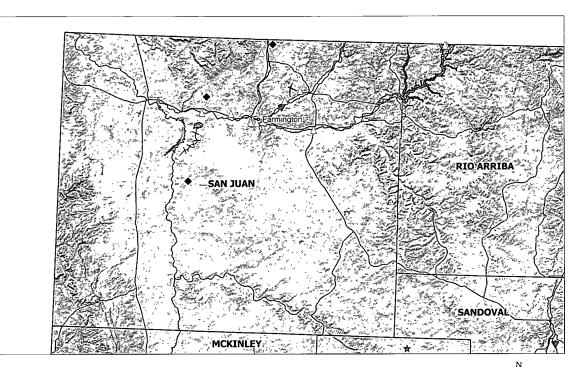





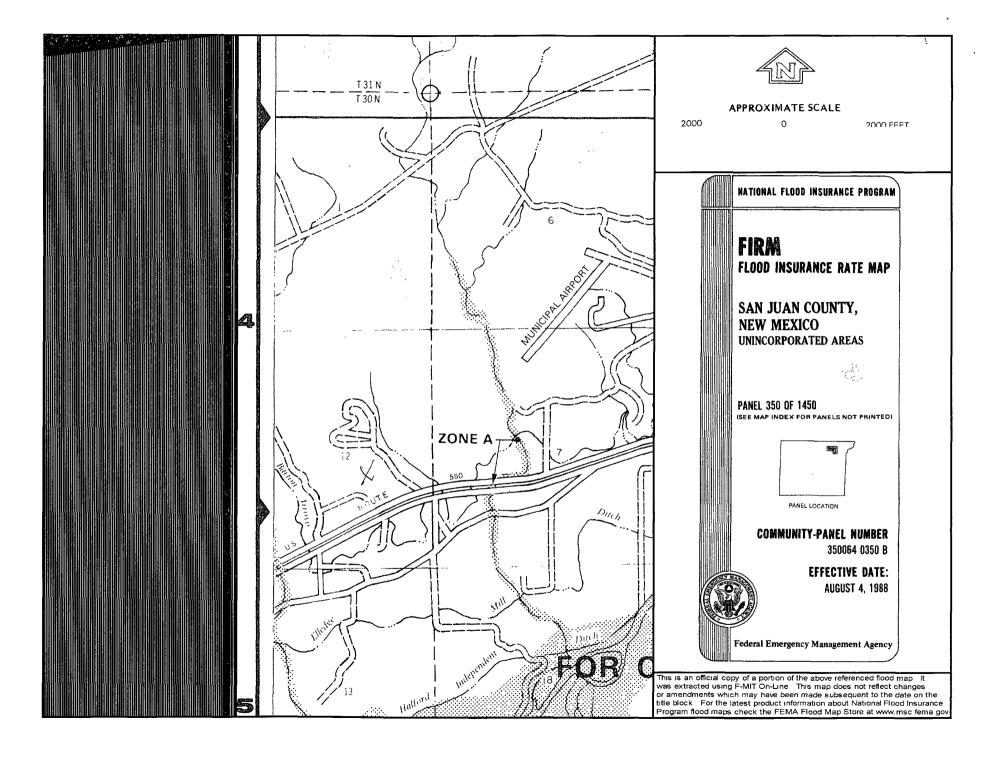

Hydrogeological Report for Scott 103s

Regional Geological context:

The Nacimiento Formation is of Paleocene age (Baltz, 1967, p. 35). It crops out in a broad band inside the southern and western margins of the central basin and in a narrow band along the west face of the Nacimiento Uplift. The Nacimiento is a nonresistant unit and typically erodes to low, rounded hills or forms badland topography.

The Nacimiento Formation occurs in approximately only the southern two-thirds of the San Juan Basin where it commformably overlies and intertongues with the Ojo Alamo Sandstone (Fassett, 1974, p. 229). The Nacimiento Formation grades laterally into the main part of the Animas Formation (Fassett and Hinds, 1971, p. 34); thus, in this area, the two formations occupy the same stratigraphic interval.

Strata of the Nacimiento Formation were deposited in lakebeds in the central basin area with lesser deposition in stream channels (Brimhall, 1973, p. 201). In general, the Nacimiento consists of drab, interbedded black and gray shale with discontinuous, white, medium- to very coarse grained arkosic sandstone (Stone e al., 1983, p.30). Stone et al. indicated that the formation may contain more sandstone than commonly reported because some investigators assume the slope-forming strata in the unit area shales, whereas in many places the strata actually are poorly consolidated sandstones. Total thickness of the Nacimiento Formation ranges from about 500 to 1,300 feet. The unit generally thickens from the basin margins toward the basin center (Steven et al., 1974). The sandstone deposits within the Nacimiento Formation are much thinner than the total thickness of the formation because their environment of deposition was localized stream channels (Brimhall, 1973, p. 201). The thickness of the combined San Jose, Animas, and Nacimiento Formations ranges from 500 to more than 3.500 feet.

Hydraulic Properties:

Reported well yields for 53 wells completed in either the Animas or Nacimiento Formations range from 2 to 90 gallons per minute and the median yield is 7.5 gallons per minute. The primary use of water from Nacimiento and Animas Formations is domestic and livestock supplies. There are no known aquifer tests for the Animas or Nacimiento Formations, but specific capacities reported for six wells range from 0.24 to 2.30 gallons per minute per foot of drawdown (Levings et al., 1990).

The Animas and Nacimiento Formations are in many ways hydrologically similar to the San Jose Formation because sands in both units produce approximately the same quantities of water. However, the greater percentage of fine materials in the Animas and Nacimiento Formations may restrict downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented fine material is highly erodible, forms a badland terrain, and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

References:

Baltz, E.H., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous rocks, east-central San Juan Basin, New Mexico: USGS Professional Paper

552, 101 p.

Brimhall, R.M., 1973, Ground-water hydrology of Tertiary rocks of the San Juan Basin, New Mexico, in Fassett, J.E., ed., Cretaceous and Tertiary rocks of the Southern Colorado Plateau: Four Corners Geological Society Memoir, p. 197-207.

Fassett, J.E., 1974, Cretaceous and Tertiary rocks of the eastern San Juan Basin, New Mexico and Colorado, in Guidebook of Ghost Ranch, central-northern New Mexico: New Mexico Geological Society, 25th Field Conference, p. 225-230.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: USGS Professional Paper 676, 76 p.

Levings, G.W., Craigg, S.d., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan structural basin, New Mexico, Colorado, Arizona, and Utah: USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.



ConocoPhillips Company GRFS / PTRRC – San Juan Business Unit Juanita Farrell 3401 East 30th Street

Farmington, NM 87402 Telephone: (505) 326-9597 Facsimile: (505) 324-6136

July 30, 2008

VIA CERTIFIED MAIL - RETURN RECEIPT REQUESTED

7110-6605-9590-0026-0364

Mary M. Jensen, Trustee 3000 Cherry Hills Farmington, NM 87402

Subject:

Scott 103S

SE Section 12, T30N, R12W San Juan County, New Mexico

Dear Landowner:

Pursuant to Paragraph 1 (b) of Subsection F of 19.15.17.13 NMAC, an operator shall provide the surface owner of the operator's proposal to close a temporary pit on-site in compliance with the on-site closure methods specified in the same Subsection of the NMAC. In compliance of this requirement, please consider this notification of ConocoPhillips' intent to close the temporary pit on the above referenced location.

If you have any questions, please contact Maxwell Blair @ (505)599-4021.

Sincerely,

Juanita Farrell

Juanita Farrell Staff Associate, PTRRC

Burlington Resources Oil & Gas Company, LP San Juan Basin Dig & Haul Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for temporary pits, which BR intends to excavate pit contents and dispose of off-site. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division–approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.
- 2. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.
- 3. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 4. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- All contents of the temporary pit including the liner will be excavated and hauled to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 6. A five point composite sample will be taken from the soil under the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b).

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300.1	1000(500,)

- 7. Upon testing standards being passed, the pit area will be backfilled with compacted, nonwaste containing, earthen material. The cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater
- 8. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.

- 9. Notification will be sent to OCD when the reclaimed area is seeded.
- 10. BR shall seed the disturbed areas the first growing season after the operator removes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100

Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

Source No. two (better quality)

Purity

Source No. two (better quality)

Purity

80 percent

Germination

Percent PLS

20 percent

Percent PLS

Source No. two (better quality)

Purity

80 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

11. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.