<u>District I</u> 1625 N. French Dr., Hobbs, NM 88240

<u>District II</u> 1301 W Grand Ave , Artesia, NM 88210

<u>District III</u> 1000 Rio Brazos Rd , Aztec, NM 87410 State of New Mexico Energy Minerals and Natural Resources

Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

Form C-144

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

1220 S St Francis Dr , Santa Fe, NM 87505	appropriate NMOCD District Office
1777	Pit, Closed-Loop System, Below-Grade Tank, or
Prop	osed Alternative Method Permit or Closure Plan Application
Type of action:	Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
71	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,
	below-grade tank, or proposed alternative method
Instructions: Please submit one a	application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
	of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the never the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
1	described of the response only that any data applicable governmental authority states, regulations of ordinances
Operator: Burlington Resources Oil	1 & Gas Company, LP OGRID#: 14538
Address: PO Box 4289, Farmington	n, NM 87499
Facility or well name: San Juan 27-	5 Unit 908
API Number: 36	0-039-30306 OCD Permit Number:
U/L or Qtr/Qtr: L(NWSW) Section	
Center of Proposed Design: Latitude:	
Surface Owner: X Federal	State Private Tribal Trust or Indian Allotment
Permanent Emergency C X Lined Unlined Li X String-Reinforced	Cavitation P&A iner type: Thickness 20 mil X LLDPE HDPE PVC Other
3 Closed-loop System: Subsect Type of Operation. P&A	Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
Drying Pad Above Grou	notice of intent) and Steel Tanks
<u> </u>	er type: Thicknessmil
Liner Seams. Welded Fa	
4	∑ 'OCT '2008
Below-grade tank: Subsection 1	I of 19.15 17 11 NMAC Type of fluid: OIL CONS. DIV DIS. 3
	I of 19.15 17 11 NMAC bbl Type of fluid: Ctection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls only Other Description: Other RECEIVED OCT 2008 OIL CONS. DIV DIS . 3
Tank Construction material:	traction Visible cylangelle lines 6 inch lift and automotic grantless that off
Secondary containment with leak de Visible sidewalls and liner	tection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls only Other
Liner Type. Thickness	Visible sidewalls only Other mil HDPE PVC Other
Ziner Type. TimeRitess	
5 Alternative Method:	

Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval

6 ,								
Fencing: Subsection D of 19 15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)								
	_							
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)								
Four foot height, four strands of barbed wire evenly spaced between one and four feet								
X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.								
7								
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)								
Screen Netting Other								
Monthly inspections (If netting or screening is not physically feasible)								
8								
Signs: Subsection C of 19 15.17.11 NMAC								
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers								
X Signed in compliance with 19.15 3.103 NMAC								
9								
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.								
Please check a box if one or more of the following is requested, if not leave blank:								
Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons	ideration of ap	proval.						
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.								
Siting Criteria (regarding permitting): 19.15.17.10 NMAC								
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable								
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for								
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria								
does not apply to drying pads or above grade-tanks associated with a closed-loop system.								
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.	∏Yes	X No						
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells								
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa	Yes	X No						
lake (measured from the ordinary high-water mark).								
- Topographic map; Visual inspection (certification) of the proposed site								
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	Yes	X No						
application.								
(Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	LINA							
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	∐No						
(Applied to permanent pits) Visual inspection (contribution) of the proposed site. Aerial photo: Setallite image.	XNA							
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	l							
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	X No						
- NM Office of the State Engineer - IWATERS database search; Visual inspection (certification) of the proposed site.								
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	Yes	X No						
 adopted pursuant to NMSA 1978, Section 3-27-3, as amended Written confirmation or verification from the municipality; Written approval obtained from the municipality 								
Within 500 feet of a wetland.	∏Yes	X No						
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site		_						
Within the area overlying a subsurface mine.	Yes	X No						
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division		_						
Within an unstable area.	Yes	X No						
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map								
Within a 100-year floodplain	Yes	XNo						
- FEMA map	⊔ '∾	<u>ت</u>						

Page 2 of 5

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API or Permit
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17 9 NMAC Instructions: Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19 15.17 13 NMAC Previously Approved Design (attach copy of design) API Previously Approved Operating and Maintenance Plan API
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC Situng Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Cimatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Eroston Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19 15.17.9 NMAC and 19 15.17 13 NMAC
14 Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15 17 13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Form C-144 Oil Conservation Division - Page 3 of 5

16	I Marcha and Hard Loffen Loffen (10.15.17.12.D.NIMAG)					
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Stee Instructions: Please identify the facility or facilities for the disposal of liquids, drilling		cilities				
are required						
Disposal Facility Name:	Disposal Facility Permit #					
Disposal Facility Name	Disposal Facility Permit #:					
Will any of the proposed closed-loop system operations and associated activities Yes (If yes, please provide the information No	s occur on or in areas that will not be used for future se	rvice and operations?				
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropria	te requirements of Subsection H of 19.15.17.13 NMAC	2				
Re-vegetation Plan - based upon the appropriate requirements of Subsec						
Site Reclamation Plan - based upon the appropriate requirements of Sub	section G of 19 15 17 13 NMAC					
Siting Criteria (Regarding on-site closure methods only: 19.15.17.10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan. Recertain siting criteria may require administrative approval from the appropriate district office of for consideration of approval Justifications and/or demonstrations of equivalency are required.	tecommendations of acceptable source material are provided belov or may be considered an exception which must be submitted to the S					
Ground water is less than 50 feet below the bottom of the buried waste.		Yes X No				
- NM Office of the State Engineer - IWATERS database search; USGS: Data obta	ined from nearby wells	∐N/A				
Ground water is between 50 and 100 feet below the bottom of the buried waste	and from marketing the	Yes X No				
- NM Office of the State Engineer - tWATERS database search; USGS; Data obtain	ned from nearby wells	∐N/A _				
Ground water is more than 100 feet below the bottom of the buried waste. - NM Office of the State Engineer - tWATERS database search; USGS; Data obtai	ned from nearby wells	X Yes No				
	,					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other signific (measured from the ordinary high-water mark).	ant watercourse or lakebed, sinkhole, or playa lake	Yes X No				
- Topographic map; Visual inspection (certification) of the proposed site		□v ∇\n.				
Within 300 feet from a permanent residence, school, hospital, institution, or church in a - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	existence at the time of initial application.	∐Yes X No				
visual hispection (certification) of the proposed site, vicinal photo, satellite image		Yes X No				
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site						
Within incorporated municipal boundaries or within a defined municipal fresh water w pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality, Written approval obta		Yes X No				
Within 500 feet of a wetland	mice from the municipality	Yes X No				
- US Fish and Wildlife Wetland Identification map, Topographic map; Visual insp	ection (certification) of the proposed site					
Within the area overlying a subsurface mine.		Yes X No				
- Written confiramtion or verification or map from the NM EMNRD-Mining and M	Ameral Division					
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mi	meral Resources: USGS: NM Geological Society:	Yes X No				
Topographic map	norm resources, escept, him see region see lety,					
Withm a 100-year floodplain FEMA map		Yes X No				
18						
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each by a check mark in the box, that the documents are attached.	of the following items must bee attached to the closur	e plan. Please indicate,				
X Siting Criteria Compliance Demonstrations - based upon the appropriate	e requirements of 19 15.17 10 NMAC					
X Proof of Surface Owner Notice - based upon the appropriate requirement	ats of Subsection F of 19.15.17.13 NMAC					
Construction/Design Plan of Burial Trench (if applicable) based upon the	ne appropriate requirements of 19.15.17.11 NMAC					
Construction/Design Plan of Temporary Pit (for in place burial of a dryi	ng pad) - based upon the appropriate requirements of 19	9.15.17.11 NMAC				
X Protocols and Procedures - based upon the appropriate requirements of	19.15.17 13 NMAC					
Confirmation Sampling Plan (if applicable) - based upon the appropriate	e requirements of Subsection F of 19.15.17.13 NMAC					
X Waste Material Sampling Plan - based upon the appropriate requirement	ts of Subsection F of 19.15.17.13 NMAC	ļ				
X Disposal Facility Name and Permit Number (for liquids, drilling fluids a	-	nnot be achieved)				
X Soil Cover Design - based upon the appropriate requirements of Subsective Planshased upon the app						
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC						

Form C-144 Oil Conservation Division Page 4 of 5

Operator Application Certification: I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print) Crystal Tafoya Title Regulatory Technician
Signature Instal Talous Date 9/30/08
e-mail address: crystal.tafoya@conocophillips.com Telephone: 505-326-9837
C-tital additiess. Stycemetry a concept mine sym 1 receptione. 403 320 7031
20
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature: Approval Date: 1/-3-08
,
Title:OCD Permit Number:
21
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC
Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure
report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed
Closure Completion Date:
Closure Method:
Waste Excavation and Removal On-site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only)
If different from approved plan, please explain.
23 Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:
Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities
were utilized.
Disposal Facility Name: Disposal Facility Permit Number
Disposal Facility Name: Disposal Facility Permit Number: Ware the closed learner and associated activities performed on or in growth to will not be used for future conversed and apparting?
Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations? Yes (If yes, please demonstrate compliane to the items below) No
Required for impacted areas which will not be used for future service and operations:
Site Reclamation (Photo Documentation)
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
24
Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in
the box, that the documents are attached. Proof of Closure Notice (surface owner and division)
Proof of Deed Notice (required for on-site closure)
Plot Plan (for on-site closures and temporary pits)
Confirmation Sampling Analytical Results (if applicable)
Waste Material Sampling Analytical Results (if applicable)
Disposal Facility Name and Permit Number
Soil Backfilling and Cover Installation
Re-vegetation Application Rates and Seeding Technique
Site Reclamation (Photo Documentation)
On-site Closure Location: Latitude Longitude: NAD 1927 1983
<u> </u>
25
Operator Closure Certification:
I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print): Title:
Signature: Date:
a mail address:

New Mexico Office of the State Engineer POD Reports and Downloads


Township: 27N Range: 05W Sections:	N. A.G. MATTAGEN AND AND AND AND AND AND AND AND AND AN
NAD27 X: Y: Zone:	Search Radius:
County: Basin:	Number: Suffix:
Owner Name: (First) (Last)	C Non-Domestic C Domestic C All
POD// Surface Data Report Avg Depth to Water	er Report Water Column Report
Glear Form WATERS N	Menu Help


WATER COLUMN REPORT 08/20/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)

	(quarter	s are	e big	gge	est	t to	smallest	:)		Depth	Depth	Water	(in
POD Number	Tws	Rng	Sec	Œ	a	q	Zone	x	Y	Well	Water	Column	
RG 81026	27N	05W	27	4	4	3				460	186	274	
SJ 00199	27N	05W	03	2	1					1840			
SJ 00046	27N	05W	04	4	4					506	260	246	

Record Count: 3

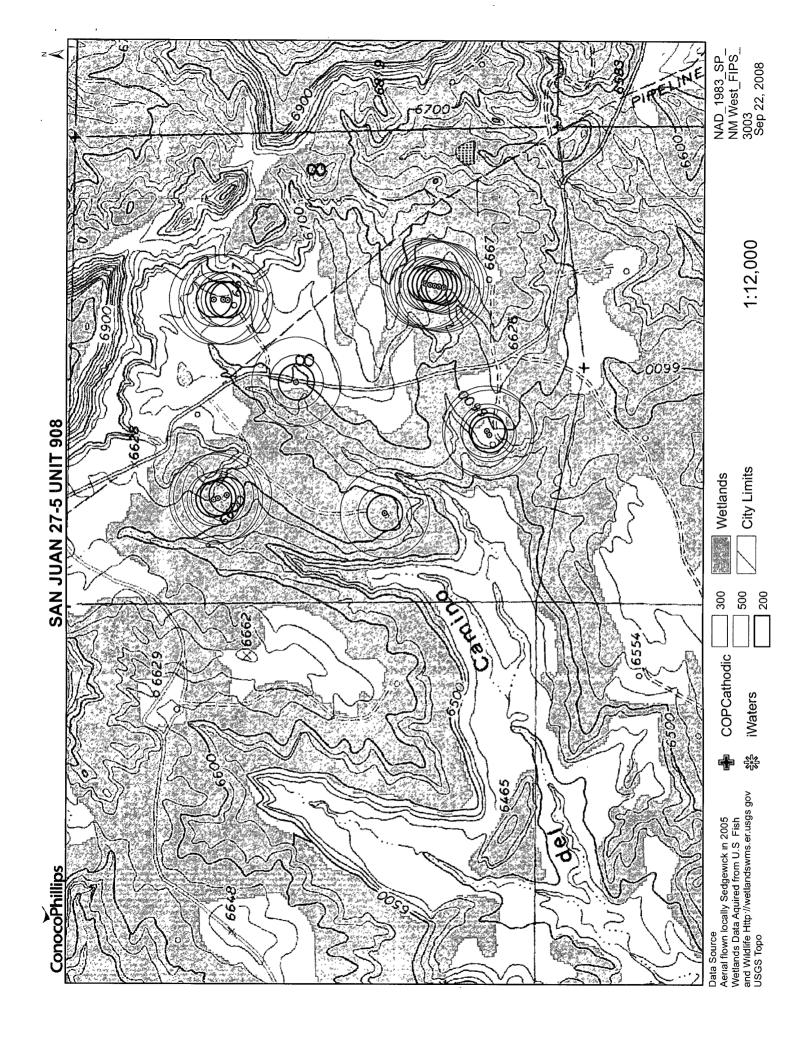

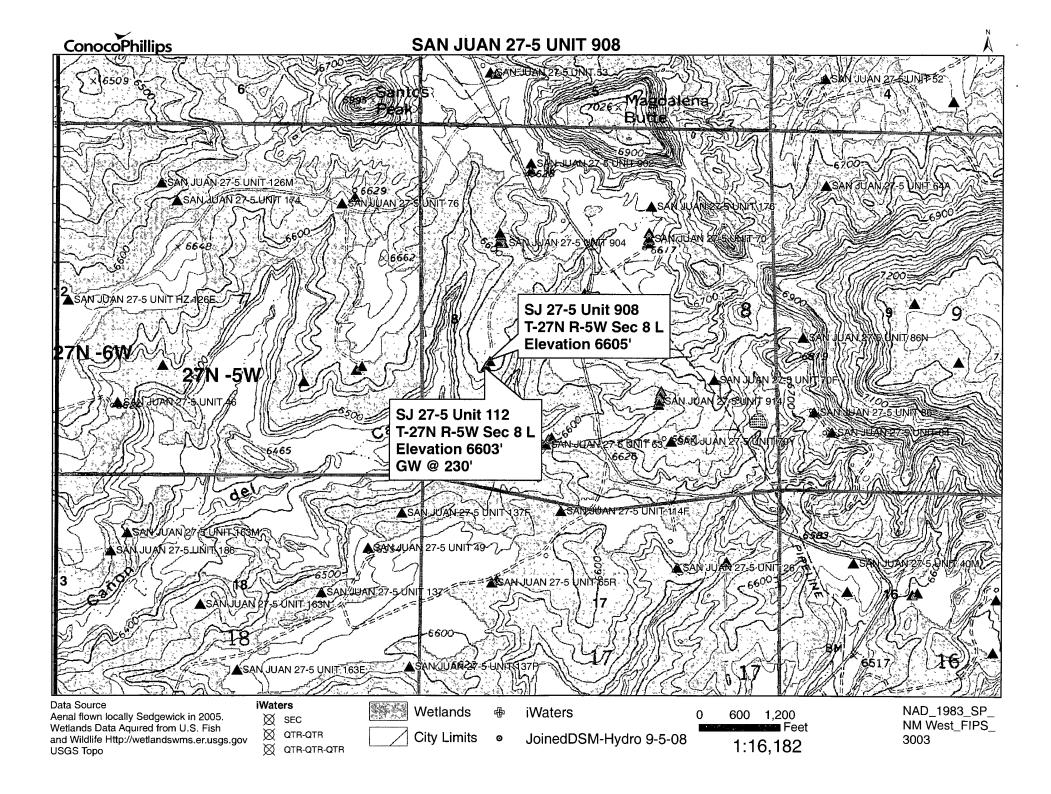

30-039-20239

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO (Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL	Location: Unit SW Sec. 8 Twp 27 Rng 5
Name of Well/Wells or Pipeline Ser	viced SAN JUAN 27-5 UNIT #112
	cps 1702w
Elevation 6603'Completion Date 9/19/	83 Total Depth 450' Land Type* N/A
Casing, Sizes, Types & Depths	N/A
If Casing is cemented, show amount	s & types usedN/A
If Cement or Bentonite Plugs have	been placed, show depths & amounts used
Depths & thickness of water zones	with description of water when possible:
Fresh, Clear, Salty, Sulphur, Etc.	230' SAMPLE TAKEN
	·
Depths gas encountered: N/A	·
Type & amount of coke breeze used:	4500 lbs.
Depths anodes placed: 420', 410', 350'	
Depths vent pipes placed: 444'	* -
Vent pipe perforations: 220'	
Remarks: gb #1	M
	MAY 3 1 1991
	OIL CON. DIV

If any of the above data is unavailable, please indesses so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

^{*}Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

UNITED STATES DEPARTMENT OF THE INTERIOR

SUBMIT IN DUPLICATE


Expires: December 31 1991


BUREAU OF LAND MANAGEMENT									5. LEASE DESIGNATION AND SERIAL NO						
													SF-079391		
WELL COMPLETION OR RECOMPLETION REPORT AND LOG*										6. IF I	NDIAN ALLOTTE	E OR TRIBE NAME			
Ta TYPE OF WELL: OIL WELL X DRY 1 OFF 13 11 30															
b TYPE OF	COMPLET	RON:										7 UNIT AGREEMENT NAME San Juan 27-5 Unit			
	NEW [] WORK	DEEP-	_	PLUG [DIFF TV	٠- ١	.,	<u>.</u> •		8 FA	RM OR LEASE NA		
	WELL X	OVER	EN	لــ	BACK		RESVR A	Other		, , , , , ,		• • • • • • • • • • • • • • • • • • •			
									بكرم				San Juan 27-	5 Unit #112	
2 NAME OF									₹ 5	0 /		8. ~-			
			URCES O	LA	SAS COM	PAI	NY.					10 5	30-039-20239 ELD AND POOL, 0		
3 ADDRESS			NO. Igton, NM (37499	(505	i) 3:	26-9700		~ J	N 2	000	A	Blanco MV/Ba		
4 LOCATIO					un accorda	nce i	with any St	ate requ	Date 1		VED 3	-		BLOCK AND SURVEY	
At top pro	d. interval i		FSL, 960'F How	WL.						CON DIST	LOW		R AREA		
							DHC-228	E		DIO!	W.	7	Sec. 8. T-27-1	N D E W	
At total de	spur						DHC-220		650	ددول	W Rais	<u> </u>		N, IX-3-VV	
					ſ	14. F	PERMIT NO) .	DATE ISSAE	23.73	Chicago		DUNTY OR PARISH	13. STATE	
					į.				ļ			·	Rio Arriba	New Mexico	
15 DATE SPU	IDDED 16		D. REACHED		17. DATE C			o prod.)		l .	VATIONS (DF, R	KB, RT, I		19. ELEV. CASINGHEAD	
7-28-69		8-5-69					9-99				6603' GR			<u></u>	
20. TOTAL DE	PTH, MO &T	rvo	21. PLUG, B.	ACK T	D MD&TVE	,	22. IF MULT				ERVALS ILLED BY	ROTAR	Y TOOLS	CABLE TOOLS	
7830'			7809	,				HOWM	2	"		0-783	nr i	1	
24. PRODUCT	TON INTERV	VAL (S) OF			TOP POTTO	<u> </u>	AME (MO A	NO TVO		L			25. WAS DIRECT	I	
	20' Mesa				Commine		•		,				SURVEY MA		
26. TYPE ELE CBL-CC		OTHER LO	GS RUN		_							27. WA	WELL CORED		
28.						C	ASING RE	CORD	Report all string	set m	wo#)				
CASING SIZ	FIGRADE	WEIGH	T, LB./FT.	DEE	TH SET (M		HOLE				EMENTING RECO	ORD	ĀN	IOUNT PULLED	
9 5/8		32.3#			235'	~		3/4	165 sx						
7		20#			3610'	_	8:	3/4	155 sx						
4 1/2		11.6	\$ 10.5#		7 830 ′		6	1/4	360 sx						
29			LINER RE	COR)				30.			π	IBING RECORD		
SIZE	TOP (ME) BOT	TOM (MD)	SAC	CKS CEMEN	7	SCREEN	(MD)	SIZE	DEPTH SET (MD)			PA	CKER SET (MD)	
				<u> </u>		_	ļ		2 3/8		7710				
31 PERFORA	TION BECC	RD (Interve	tire and ru	mber t			32.		<u> </u>	in en	T EDACTI IDE	CEME	NT SQUEEZE, E	TC	
4034, 4036, 40					1 4269 421			TH INTE	RVAL (MD)	D. SHC			NI SQUEEZE, E		
4382, 4388, 43							4034-47		KYAL (MD)	674 h		r gel, 200,000# 20/40 Brady sd			
4514, 4526, 45						-,	4924-52					00,000# 20/40 Brady sd			
4600, 4647, 46		-				•••	5396-60					00,000# 20/40 Brady sd			
5008, 5015, 50									nt'd on back	 					
33									RODUCTION	*					
DATE FIRST PRODUCTION PRODUCTION METHOD (Flowing					ng, gas lint, pumping—size and type of pump) O					SI	Producing or shut-in)				
DATE OF TEST		HOURS	ESTED	СНОК	E SIZE	PRO	D'N FOR	OIL-E	BL	GA\$	MCF	WATE	R-BBL	GAS-OIL RATIO	
11-19-9	0	1			ĺ	TES1	PERIOD			1642	MCF/D Pitot (]		ļ	
FLOW TUBING		CASING	PRESSURE	CALC	ULATED	Oil	L-BSL	<u> </u>	GAS-MCF	11043	WATER-BE			OIL GRAVITY-API (CORR.)	
	-	ł			UR RATE		-		ſ		ļ.			1	
SI 700 34 DISPOSIT	ION OF GAS	SI 72		ad ar	 -	_			1643 MCF/D		L		ITEST WITNESSE	D BY	
		To be			· 										
35 LIST OF A	TTACHMEN	its None		_											
36. I hereby co	36. I hereby certify that the foregoing and pitalished information is complete and correct as determined from all available records														
(Λ		// /	,							•				
SIGNED	[]ear	all 1	all	0	TITL	.E	Regulato	ry Adr	nınistrator			ace	SPIED FO	OR RECORD	
	,	7-7						<u> </u>				.			
			*(\$	ee in	structio	ns :	and Spa	ces f	or Additiona	i Data	on Reverse	e Side)	•	

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department of agents 1999 United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

MOCD


San Juan 27-5 Unit 908 Mines, Mills and Quarries Web Map

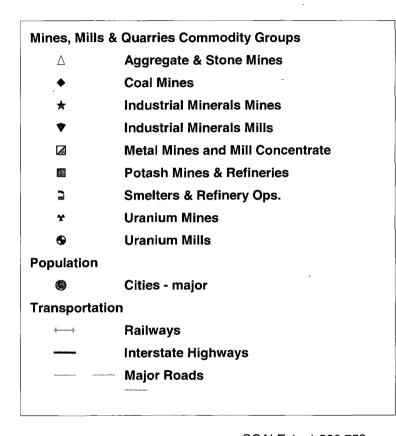

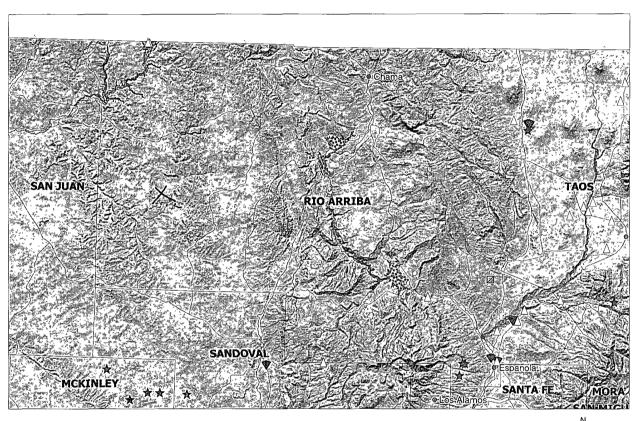





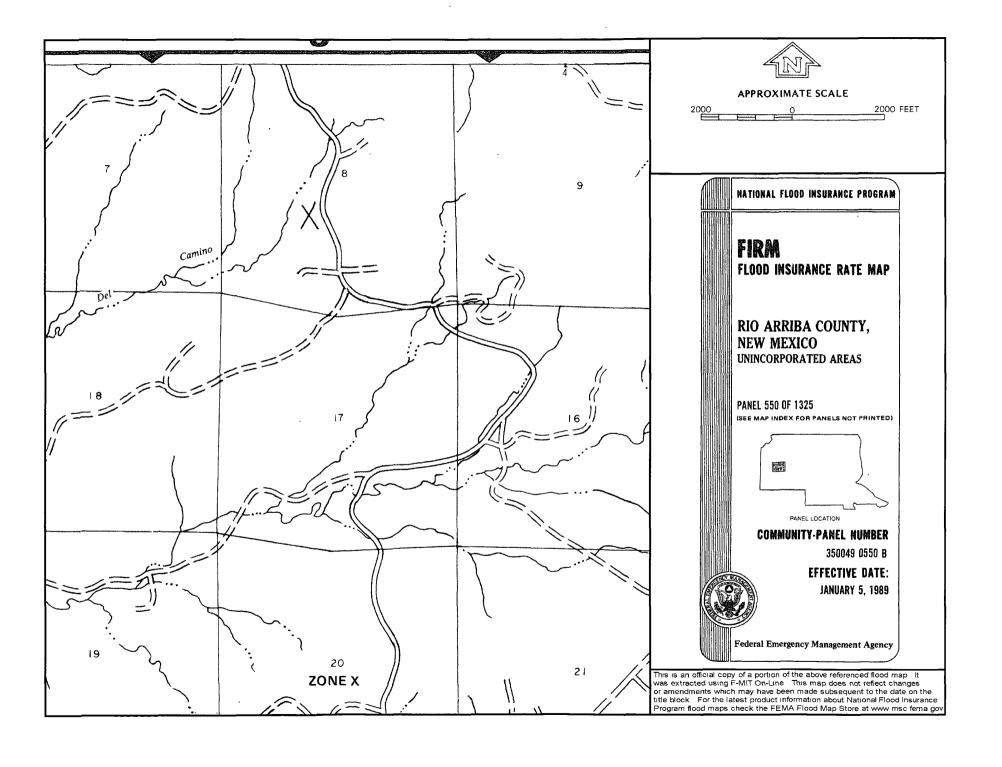

Hydrogeological report for San Juan 27-5 Unit 908

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The San Juan 27-5 Unit 908 is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 100' as determined by the topographic map and the Cathodic well data from the San Juan 27-5 Unit 112 with an elevation of 6603' and groundwater depth of 230'. The subject well has an elevation of 6605' which is about the same as the San Juan 27-5 Unit 112, therefore the groundwater depth is greater than 100'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The Cathodic data provided the indication of groundwater depth and the San Jose formation will create a stable area for this new location.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Thursday, July 10, 2008 8:16 AM

To:

'mark_kelly@nm.blm.gov'

Subject:

OCD Pit Closure Notification

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

EPNG A 1B

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E

Huerfanito Unit 83E

Huerfanito Unit 87E

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S

Huerfano Unit 108F

Huerfano Unit 282E

Huerfano unit 305

Huerfano unit 307

Huerfano Unit 554

Johnston Federal 24S

King 3

Lackey A Com 100S

Lambe 1C

Lambe 7S

Lively 8M

Lloyd A 100

Lloyd A 100S

Martin 100

McCord B 1F

McDurmitt Com 100S

McManus 13R

Mitchell 1S

Morris A 14

Newberry B 1N

Newsom B 503

Newsom B 8N

Pierce A 210S

Roelofs 1N

San Juan 27-4 Unit 132G

San Juan 27-4 Unit 132M

San Juan 27-4 Unit 139N

San Juan 27-4 Unit 140B

San Juan 27-4 Unit 141M

San Juan 27-4 Unit 147Y

San Juan 27-4 Unit 153B

San Juan 27-4 Unit 22M

San Juan 27-4 Unit 38P

San Juan 27-4 Unit 41N

San Juan 27-4 Unit 42N

San Juan 27-4 Unit 569N

C-- 1-- 07 4 11-3 50N

San Juan 27-4 Unit 59N

San Juan 27-4 Unit 60M

San Juan 27-5 Unit 113F

San Juan 27-5 Unit 59N

San Juan 27-5 Unit 84N

San Juan 27-5 unit 901

San Juan 27-5 Unit 902

San Juan 27-5 Unit 903 San Juan 27-5 Unit 904

San Juan 27-5 Unit 905

San Juan 27-5 Unit 906

San Juan 27-5 Unit 907.

(San Juan 27 5 Unit 908,

San Juan 27-5 Unit 909

San Juan 27-5 Unit 910

San Juan 27-5 Unit 912

San Juan 27-5 Unit 913

San Juan 27-5 Unit 914

San Juan 27-5 Unit 915

San Juan 27-5 Unit POW 916

San Juan 28-4 Unit 27M

San Juan 28-5 Unit 54F

San Juan 28-5 Unit 62E

San Juan 28-5 Unit 63M

San Juan 28-5 Unit 76N

San Juan 28-5 Unit 77N

San Juan 28-6 Unit 113N

The state of the state of

OIL CONS. DIV.

2007 AUS -1 PM 3: 43 DIST. 3


RECEIVED Form U-1va

[IIII Revised October 12, 2005
210 Submit to Appropriate District Office
State Lease - 4 Copies State of New Mexico.
though Mastels & Subart Resources Department 1026 N. French Dr., Hobbs, S.M. 80040 DISTRICT R 1301 W. Grand Avenue, Septe a. HM. SH216 CIL CONSERVATION DIVISION MATRIE IL 1820 Santa St Francis Or. Santa Fa, N.H. 67505 Per Lease - 9 Capies 3306 Rio Brenog Rit, beten, Ett. 67819 DESTRUCT IV AMENDED REPORT 1220 S. St. Francis Dr., Santa Vo. K.M. 87506 WELL LOCATION AND ACREAGE DEDICATION PLAT 30-039- 2 Basin Dakota/Blanco Mesaverde 599/72319 Property Cud fall Hurok SAM JUAN 27-5 UNIT <u>7454</u> 908 OCERT Elevation BURLINGTON RESOURCES OIL & GAS COMPANY LP 6605 14538 Sprince Location 27 N 5 W SCUTH WEST RID ARRIBA Bottom Hole Location If Different From Surface Vi. or (a; na. Lad Gen Feet from the Karth/South line | Feet bon the 27 N 5 W 2605 1590 WEST RIO ARRIBA SOUTH Only Sa. 320 W/2 NO ALLOWABLE TILL DZ ASSIGNED TO THIS COMPLETION UNTIL ALL DITERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN AFPROVED BY THE DIVISION 16 8 30%7'05 5208 le 17 OPERATOR CERTIFICATION Thirstly vertify that the tejerrollen contained berein to run and consider to the bast of my insulates and bati O . SURFACE LOCATION 9 4 BOTTOM HOLE LOCATION USA SF+079393 LAT: 35.585264" N LONG: 107.387926° W LAT: 36" 36,1743" H LOFG: 107" 25.2154" W SECTION B 1800 ** SURVEYOR CERTIFICATION hereby cortily that the stall location shows on this plat we white 2 from field makes by animal summer made by m Lat. 36.560040° fi Long 107.388475° W trader my supervision, and Bind the state to true us. In the state to the best of my belief. 984 LAT: 30° 35 28:9' M LANG: 40° 25.149:4' W 5/14/07 0-33 CANDI223 17028 Cullinate Haman N 78°52'24' V 2090.161 \$ 65°25'20' W 2670.27

DISTRICT I

BURLINGTON RESOURCES OIL & GAS COMPANY LP. SAN JUAN 27-5 UNIT 908 - 1852' FSL \$ 984' FWL (SURFACE) 2605' FSL # 1590' FWL (BOTTOM)

SECTION 8, T-27-N, R-5-W, N.M.P.M., RIO ARRIBA COUNTY, N.M.

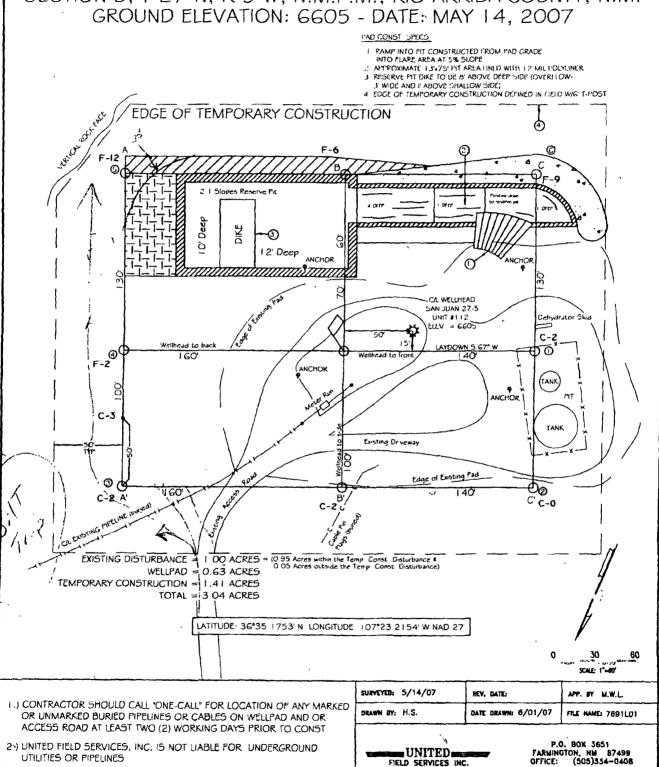


BURLINGTON RESOURCES OIL & GAS COMPANY LP.

SAN JUAN 27-5 UNIT 908 - 1852' FSL & 984' FWL (SURFACE)

2605' FSL & 1590' FWL (BOTTOM)

SECTION 8, T-27-N, R-5-W, N.M.P.M., RIO ARRIBA COUNTY, N.M.

GROUND ELEVATION: 6605 - DATE: MAY 14, 2007

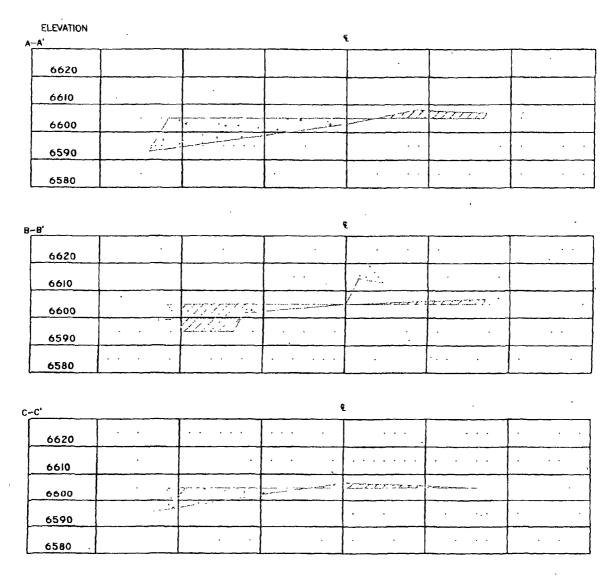

1" = 60' - HORIZ.1" = 30' - VERT.

2) UNITED FIELD SERVICES, INC. IS NOT: LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES

SURVEYEDS	5/14/07	REV.	DATE;	APP. BY	M.W.L.
DRAWN BY:	н.s.	DATE	DRAWN: 6/01/07	FRE NAME	E: 7691C01

UNITED FIELD SERVICES INC.

P.O. BOX 3651 FARMINGTON, NM 87488 OFFICE: (505)334-0408

I) CONTRACTOR SHOULD CALL "ONE-CALL" FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELLPAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONST

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Tests Method	Limit (mg/Kg)
EPA SW-846 8021B or 8260B	0.2
EPA SW-846 8021B or 8260B	50
EPA SW-846 418.1	2500
EPA SW-846 8015M	/5 00
EPA 300.1	/1009/500
	EPA SW-846 8021B or 8260B EPA SW-846 8021B or 8260B EPA SW-846 418.1 EPA SW-846 8015M

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.