District I

1625 N French Dr., Hobbs, NM 88240

District II

1301 W Grand Ave , Artesia, NM 88210

State of New Mexico Energy Minerals and Natural Resources

Department Oil Conservation Division

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

Form C-144

District III	1220 South St.	Francis Dr.	
1000 Rio Brazos Rd , Aztec, NM 87410 District IV	Santa Fe, NM	A 87505	For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the
1220 S St Francis Dr , Santa Fe, NM 87505			appropriate NMOCD District Office
799	Pit, Closed-Loop System	n, Below-Grade	Tank, or
Pro	posed Alternative Method	Permit or Closi	ure Plan Application
Type of action:	Permit of a pit, closed-loop sys	stem, below-grade tan	ik, or proposed alternative method
71		C	nk, or proposed alternative method
	Modification to an existing per		, FF
	=		ed or non-permitted pit, closed-loop system,
	below-grade tank, or proposed		F., F.,
Instructions: Please submit one	application (Form C-144) per indiv	idual pit, closed-loop	system, below-grade tank or alternative request
			sult in pollution of surface water, ground water or the
environment Nor does approval	relieve the operator of its responsibility to comply	with any other applicable g	overnmental authority's rules, regulations or ordinances
Operator: Burlington Resources C	Oil & Gas Company, LP		OGRID#: 14538
Address: PO Box 4289, Farming	ton, NM 87499		
Facility or well name: Canyon La	rgo Unit 279E		
API Number:	30-039-30439	OCD Permit Number	:
U/L or Qtr/Qtr: I(NE/SE) Sec	tion: 14 Township: 25N	Range:6	W County: Rio Arriba
Center of Proposed Design: Latitud	le: 36.397211° N	Longitude:	107.432063°W NAD: 1927 X 1983
Surface Owner: X Federal	State Private	Tribal Trust or Indian	Allotment
			State and the state of the stat
X Pit: Subsection F or G of 19.15	17.11 NMAC		
Temporary: X Drilling W	orkover		
Permanent Emergency	Cavitation P&A		,
		X LLDPE I	HDPE PVC Other
X Lined Unlined	Liner type Thickness 12 mil	· El 20212 [] ·	
X Lined Unlined X String-Reinforced	Liner type Thickness 12 mil	K Edol E	
	Factory Other	Volume4400	bbl Dimensions L 65' x W 45' x D 10'

Liner Seams Welded Factory Other	\$2728	RECEIVEL 2008
Below-grade tank: Subsection I of 19 15 17.11 NMAC	A 252	OIL CONS. DIV. DIST
Volume: bbl Type of fluid	/c <u>ç</u>	250261811
Tank Construction material:		25150261811
Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off		
Visible sidewalls and liner		_
Liner Type Thickness mtl HDPE PVC Other	_	
£		

Other

notice of intent)

Above Ground Steel Tanks Haul-off Bins

Alternative Method:

Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church) Four foot height, four strands of barbed wire evenly spaced between one and four feet X Alternate Please specify 4' hogwire fence with a single strand of barbed wire on top.								
A fatternate a field of specify a fing with class with a single serand of barbet with on top.								
Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible)								
8								
Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19 15 3.103 NMAC								
Administrative Approvals and Exceptions:								
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.								
Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons	ideration of ap	proval.						
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval								
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.								
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells								
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	X No						
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	XNo						
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	NA							
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image								
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pus)	Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.							
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	_							
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	XNo						
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.								
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	XNo						
 Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a wetland. US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site 	Yes	XNo						
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	XNo						
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	Yes	XNo						
Society; Topographic map Within a 100-year floodplain - FEMA map	Yes	XNo						

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19 15.17.9 NMAC
X Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17 9
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
X Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
X Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19 15.17.13 NMAC
Previously Approved Design (attach copy of design) API or Permit
12
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17 9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15 17 10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17 11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15 17.13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17 9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17.10 NMAC
Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19,15.17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15.17 11 NMAC
Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15 17.11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15 17.9 NMAC and 19.15.17.13 NMAC
14
Proposed Closure: 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.
Type. X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
Alternative Proposed Closure Method: Waste Excavation and Removal
Waste Excavation and Removal Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
X In-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan.
Please indicate, by a check mark in the box, that the documents are attached.
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15 17 13 NMAC

Form C-144 Oil Conscivation Division Page 3 of 5


Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks	or Haul-off Bins Only: (19 15.17 13 D NMAC)								
Instructions Please identify the facility or facilities for the disposal of liquids, drilling fluids an are required.	a aru cunings. Ose anachment y more man two jacunie	3							
Disposal Facility Name Disposa	al Facılity Permit #:	_							
Disposal Facility Name: Disposal Facility Permit #:									
Will any of the proposed closed-loop system operations and associated activities occur of Yes (If yes, please provide the information No	on or in areas that will not be used for future service	and opera	ations?						
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection I of Re-vegetation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate requirements of Subsection Countries Site Reclamation Plan - based upon the appropriate Reclamation Plan - based upo	19.15.17.13 NMAC	,							
17									
Siting Criteria (Regarding on-site closure methods only: 19 15.17.10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan. Recommen certain siting criteria may require administrative approval from the appropriate district office or may be for consideration of approval Justifications and/or demonstrations of equivalency are required. Please	considered an exception which must be submitted to the Santa		-						
Ground water is less than 50 feet below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS: Data obtained from	n nearby wells	Yes N/A	X No						
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes	X No						
- NM Office of the State Engineer - (WATERS database search; USGS; Data obtained from	n nearby wells	□N/A							
Ground water is more than 100 feet below the bottom of the buried waste.		Yes	No						
- NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from	nearby wells	□N/A							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant water (measured from the ordinary high-water mark).	rcourse or lakebed, sinkhole, or playa lake	Yes	X No						
- Topographic map; Visual inspection (certification) of the proposed site	,	٦							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	at the time of initial application.	⊥_Yes ¬√	X No						
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five hopurposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of Within incorporated municipal boundaries or within a defined municipal fresh water well field of pursuant to NMSA 1978, Section 3-27-3, as amended.	the time of the initial application.	Yes	X No						
- Written confirmation or verification from the municipality; Written approval obtained from Within 500 feet of a wetland	m the municipality	Yes	X No						
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (co	ertification) of the proposed site								
Within the area overlying a subsurface mine		Yes	XNo						
 Written confirantion or verification or map from the NM EMNRD-Mining and Mineral D Within an unstable area. Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Re 		Yes	XNo						
Topographic map	sources; USGS; NW Geological Society,								
Within a 100-year floodplain FEMA map		Yes	X No						
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the fo	ollowing items must bee attached to the closure pla	n. Please	indicate,						
by a check mark in the box, that the documents are attached.									
X Siting Criteria Compliance Demonstrations - based upon the appropriate require X Proof of Surface Owner Notice - based upon the appropriate requirements of Su									
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of surface of the construction of the constructi									
	•	17.11 NM.	AC						
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) Protocols and Procedures - based upon the appropriate requirements of 19 15.17	• • • •		-						
Confirmation Sampling Plan (if applicable) - based upon the appropriate require	ments of Subsection F of 19.15.17.13 NMAC								
Waste Material Sampling Plan - based upon the appropriate requirements of Sul	section F of 19.15.17.13 NMAC								
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill	cuttings or in case on-site closure standards cannot b	e achieve	d)						
Soil Cover Design - based upon the appropriate requirements of Subsection H o									
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17.13 NMAC X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC									


19			,	
Operator Application			Laws 6 Landau and 11 C 6	
•	information submitted with this application is tru			
Name (Print):	Ethel Tally	Title	Staff Regulatory Technician	
Signature	the sally	Date:	9-30-08	
e-mail address:	Ethel Tally@ConocoPhillips.com	Telephone	505-599-4027	
20		. I ∑		
OCD Approval:	Permit Application (including closure plan)			
OCD Representative	Signature: Branslon	Yourll.	Approval Date: 11-4-08	3
		_		
Title: En	vio Ispec	OCD Peri	nit Number:	
21				
Į	uired within 60 days of closure completion	1): Subsection K of 19 15 17 13 NMA	С	
Instructions: Operators	are required to obtain an approved closure plan	prior to implementing any clos	ure activities and submitting the closure report. Th	
	submitted to the division within 60 days of the co ias been obtained and the closure activities have		es. Please do not complete this section of the form	until an
approved closure plun n	,		a Campletian Note:	Ī
		Ciosur	e Completion Date:	
22				
Closure Method:				
Waste Excavation	· · · ·	hod Alternative Closure	Method Waste Removal (Closed-loop system)	ems only)
If different from	approved plan, please explain.			
23				
	ling Waste Removal Closure For Closed-loop S			
Instructions: Please ide were utilized.	ntify the facility or facilities for where the liquid	ds, drilling fluids and drill cutt	ings were disposed. Use attachment if more than	two facilities
Disposal Facility Nai	me:	Disposal Facility	y Permit Number.	1
Disposal Facility Nai			Permit Number.	
Were the closed-loop	system operations and associated activities perf			
Yes (If yes, plea	se demonstrate complilane to the items below)	□No		
Required for impacte	ed areas which will not be used for future service	and operations:		
l =	n (Photo Documentation)			
=	and Cover Installation			
Re-vegetation A	pplication Rates and Seeding Technique			
24				
	ttachment Checklist: Instructions: Each of to numents are attached.	he following items must be att	ached to the closure report. Please indicate, by a	check mark in
	re Notice (surface owner and division)			
	Notice (required for on-site closure)			
l ≒	on-site closures and temporary pits)			
	Sampling Analytical Results (if applicable)			
	l Sampling Analytical Results (if applicable)			
1===	ity Name and Permit Number			
l ⊯ '	g and Cover Installation			
	Application Rates and Seeding Technique			
	on (Photo Documentation)			
On-site Closure		Longitude:	NAD 1927	1983
				<u> </u>
25				
Operator Closure Co	ertification:			
I hereby certify that the	information and attachments submitted with this		and complete to the best of my knowledge and bel	ef. I also certify that
	th all applicable closure requirements and condit			
Name (Print).		Title:		
Signature [.]		Date:		
e-mail address:		Telephone:		

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 25N Range: 06W Sections: 10,11,12,13,14,15,22,23,24
NAD27 X: Zone: Search Radius:
County: Basin: Number: Suffix:
Owner Name: (First) (Last) One-Domestic Omestic
1 DOD (0 (D. D.)
POD / Surface Data Report Avg Depth to Water Report
Water Column Report
Clear Form iWATERS Menu Help
WATER COLUMN REPORT 09/30/2008
(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are biggest to smallest) Depth Depth Water FOD Number Tws Rng Sec q q q Zone X Y Well Water Colum
TOD NAMED TO THE PROOF OF THE MOTER COLUMN

No Records found, try again

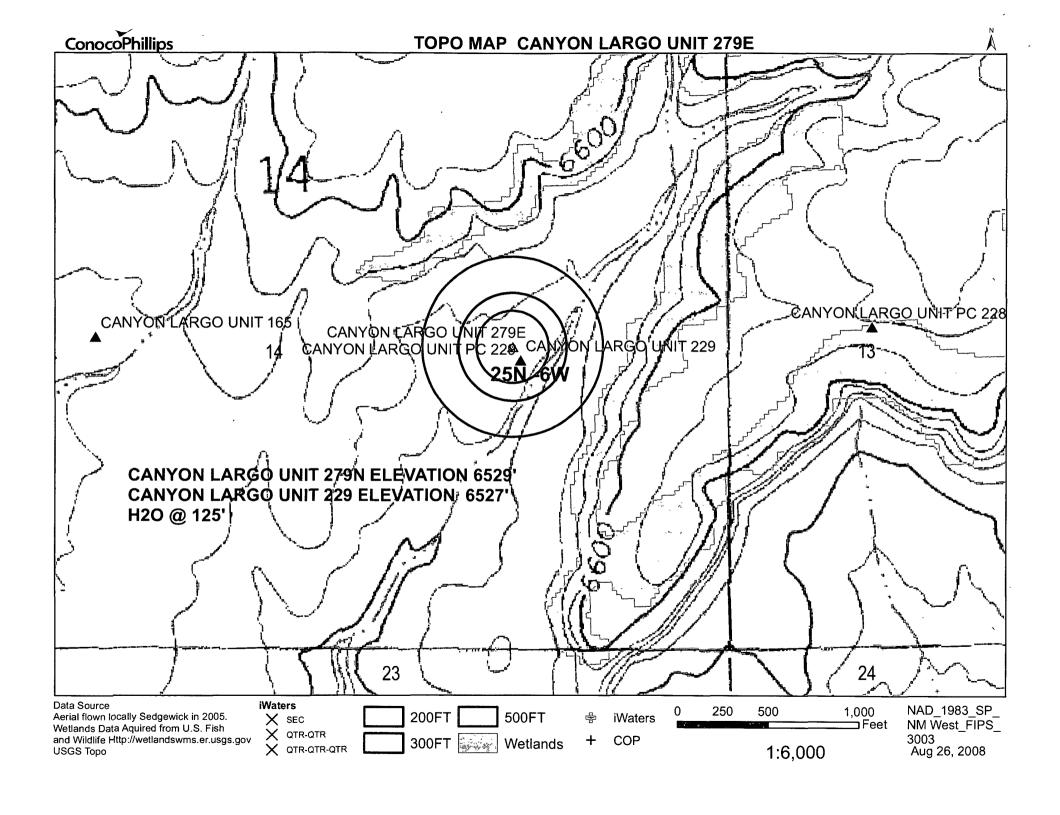

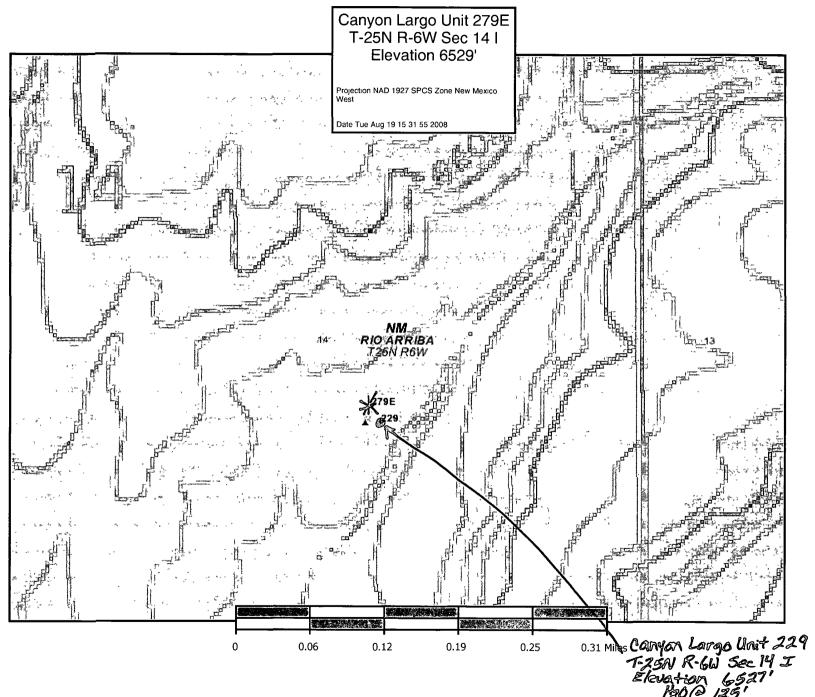

https://l48twp.conocophillips.net/servlet/com.esri.esrimap.Esrimap?ServiceName=SanJuan&ClientVersion=4.0&Form=True&Encode=False

DATA SHEET FOR DEEP GROUND BED CATHODIC. PROTECTION WELLS NORTHWESTERN NEW MEXICO

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.


Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

			:									. /
Form 9-236 (Re/. 5-63)		UN	IITED	ST	ATES	SI	UBMIT IN	DUPLICA		1	Form a	spproved. Bureau No. 42-R355.5.
	DEPAF						OR	struct	ther in-	5. LEASE D		TION AND SERIAL NO.
				-	URVEY			revers	e side)	1	07888	/
WELL CO	MDI ETION	1 OB	RECO	API I	ETION	REPOI	RT AN	D LOG	*			THE OR TRIBE NAME
1a. TYPE OF WEL										7. UNIT AG		
L TYPE OF COM	w	ELL	WELL X	U	DRY 📙	Other				1		
NEW X		EEP-	PLTG BACK	7 ;	DIFF.	Other _				S. FARM OR	ON LEASE	argo Unit
2. NAME OF OPERAT			DACK C							Canyo	n Lai	rgo Unit
El Paso	Natural: G	as Com	pany							9. WELL NO).	
8. ADDRESS OF OPE					0 =1						229	L. OR WILDCAT
BOX 990,	Farming	ton, N	lew Mex	cico	87401	u State r	equiremen	tal*				•
	1630's, 1		iy unu in t	1000144	nce with an	y Dause .	equal emen	••,		SO. BL	anco R. M.,	Pictured Clif
At top prod. int										OR ARE	A	05 22 20 6 22
	ervar reported	,c.o #					-			Sec. 1	4, T	-25-N, R-6-W
At total depth										12. COUNTY	NMP	1 13. STATE
				14.	PERMIT NO.	7	DATE.	ISSUED		PARISH		
15. DATE SPUDDED	16. DATE T.D.	REACHED	17. DATE	E COMP	L. (Ready t	o prod.)	1 18 8781	TATIONS (DE	PEP	Rio Ar		New Mexico
11- 5 - 73	11-20			4-23		,	10. ELE	65271		11, 02, 210.)		
20. TOTAL DEPTH, MD	▲ TVD 21. P	UG, BACK	T.D., MD &		22. IF MUL	TIPLE CO	MPL.,	23. INTE		ROTARY TO	OLS	CABLE TOOLS
26441		26341		}	HOW 31	ANI			>	0-2644		
24. PRODUCING INTER	RVAL(S), OF THE	S COMPLE	TION-TOP	BOTTO	M, NAME (ID AND T	vd) •				2	5. WAS DIRECTIONAL SUBVEY MADE
	2554-72	Pictu	red Cl	iffs	1			1		. •		NO
26. TIPE ELECTRIC		•			· · · · · · · · · · · · · · · · · · ·						1 27 5	AS WELL CORED
IEL, CDL-			Surve	Ţ								NO
23.					CORD (Rep		rings set i					·
CASING SIZE	WEIGHT, LE	./FT.	DEPTH SE			LE SIZE			NTING			AMOUNT PULLED
8 5/8" 2 7/8"	24# 6.44		264	<u>9 'GL</u>	<u> </u>	2 1/4 6 3/4			25 c u	u.ft.		
2 1/0	-	-		4		0 3/4	·		<u> </u>	1.1 0.		
29.		Time	nraonn					- 20		NIPINA PRO	ODD	
BIZE	TOP (MD)		RECORD	O L C E O	CEMENT*	SCREEN	(345)	30.		DEPTH SET (PACKER SET (MD)
			(11)		197	- SCREEN				bingles		
				CH/	40	<u></u>			-	mrugrez	S LOD	MT6: FOIL
81. PERFORATION REC	OED (Interval,	size and	number	17.	4	1 2.	AC	ID, SHOT,	FRACT	URE, CEMEN	T SQU	EEZE, ETC.
			/Q\	'Om	1974	BEPTH	I INTERVAL	L (MD)	AM	OUNT AND KI		MATERIAL USED
2554-2572	' with 18	shots	mer 2	one.	າ ົດ	2554	-2572 '		26,00	00# sand	, 26	,318 gallons wa
	"" ""		1 7	one.	-L1 -	1						
				" "	con. 3	/				······		
33.°				0 12		UCTION		<u> </u>	1274	-		
DATE FIRST PRODUCT	ION PRO	DUCTION !			, gas lift, p	ımping—	size and \$	ype of pum)		ut-in)	s (Producing or
DATE OF TEST	HOURS TESTE	CH	OKE SIZE		D'N. FOR	OIL—B	BL.	GASNC	٠.	WATER-BB		lut-in GAS-OIL BATIO
4-23-74	3		3/4"	TES	T PERIOD						1	
PLOW, TUBING PRESS.	CASING PRESS	CRE CA	LCULATED HOUR RATI		—BBL.	G.	3409 M	ICF/D I	WATER-	-BBL.	OIL G	BAVITT-API (CORR.)
84. DISPOSITION OF G	SI 808	or fuel. ve	nted, etc.)		·		AOF			TEST WITNE	SSED R	<u> </u>
		,, ••	,)									nergill
B5. LIST OF ATTACH!	MENTS									1 DOTEIL	1001	


TITLE Drilling Clerk


DATE _


36. I hereby certify, that the foregoing and attached information is complete and correct as determined from all available records

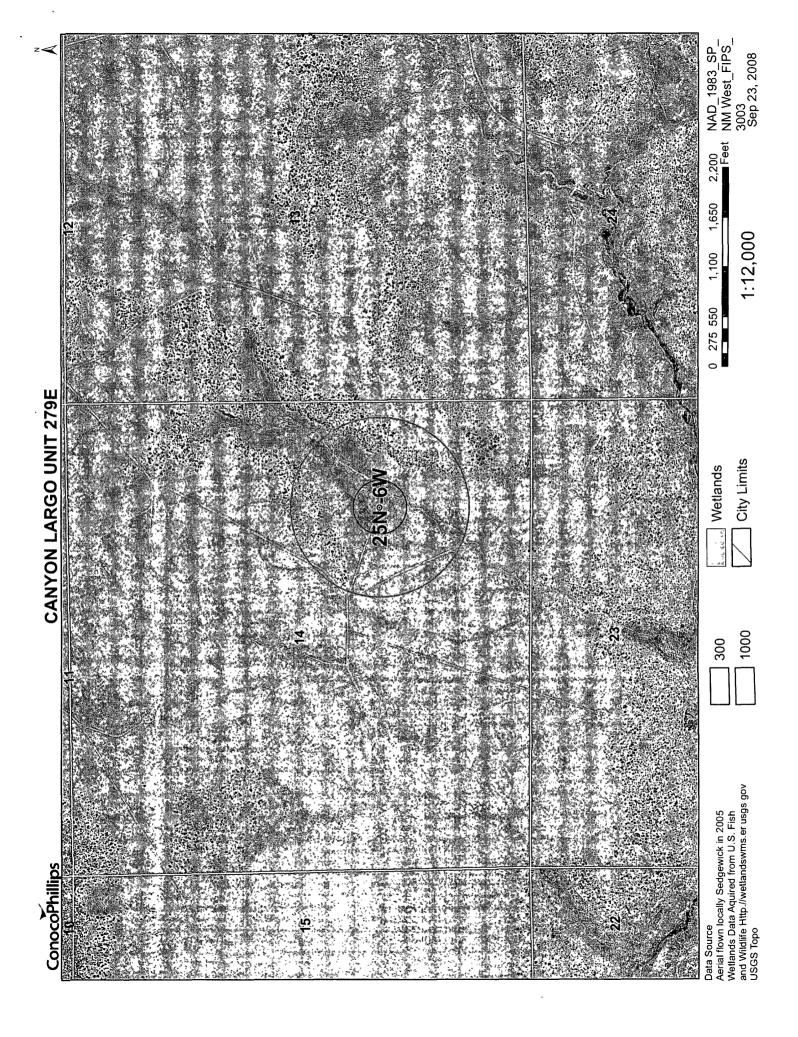


CANYON LARGO UNIT 279E/MINES, MILLS AND QUARRIES MAP

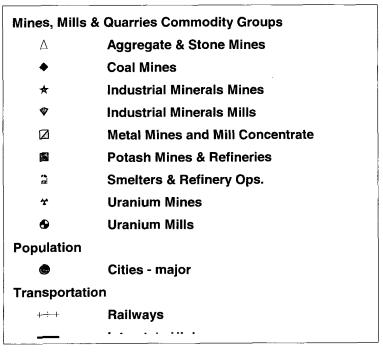

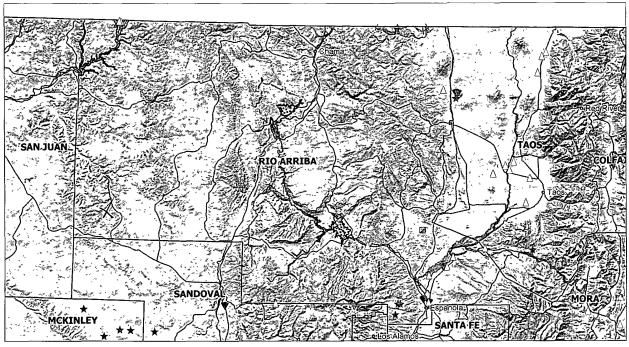





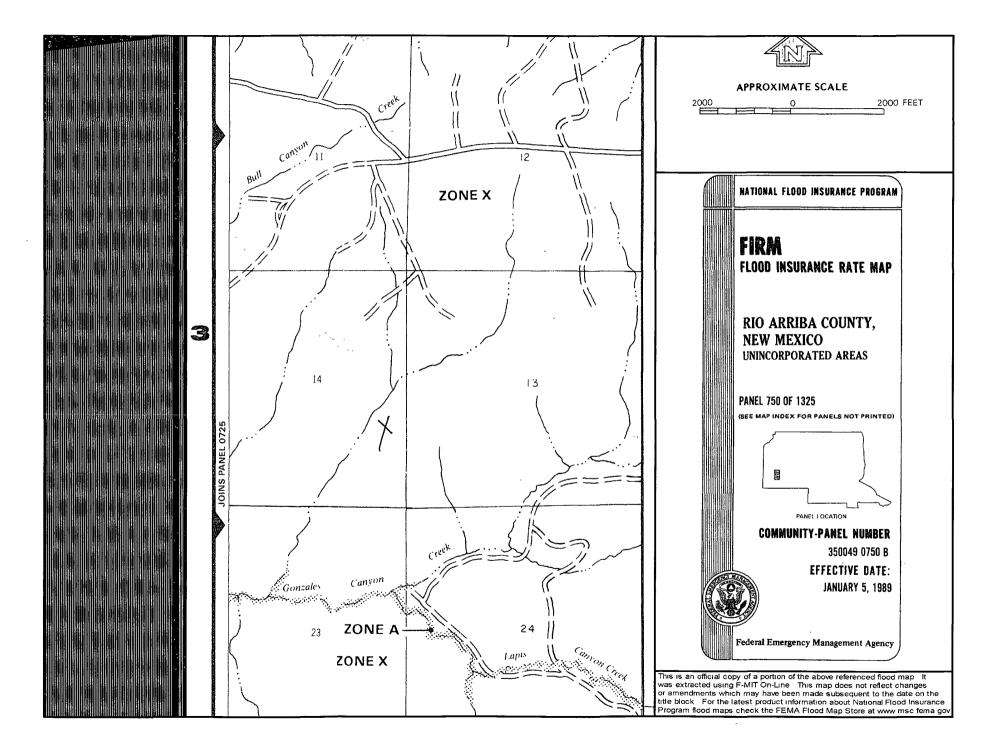

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Canyon Largo Unit 279N is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 100' as determined by the topographic map and the Cathodic well data from the Canyon Largo Unit 229 with an elevation of 6527 and groundwater depth of 125'. The subject well has an elevation of 6529' which is great than the Canyon Largo Unit 229, therefore the groundwater depth is greater than 100'. Using this cathodic data point, the indication of groundwater depth and the San Jose formation will create a stable area for this new location.

Hydrogeological report for Canyon Largo Unit 279E

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Thursday, July 10, 2008 8:16 AM

To:

'mark_kelly@nm.blm.gov'

Subject:

OCD Pit Closure Notification

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

EPNG A 1B

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E

Huerfanito Unit 83E

Huerfanito Unit 87E

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S

Huerfano Unit 108F

Huerfano Unit 282E

Huerfano unit 305

Huerfano unit 307 Huerfano Unit 554

Johnston Federal 24S

King 3

Lackey A Com 100S

Lambe 1C

Lambe 7S

Lively 8M

Lloyd A 100

Lloyd A 100S

Martin 100

McCord B 1F

McDurmitt Com 100S

McManus 13R

Mitchell 1S

Morris A 14

Newberry B 1N

Newsom B 503

Newsom B 8N

Pierce A 210S

Roelofs 1N

San Juan 27-4 Unit 132G

San Juan 27-4 Unit 132M

San Juan 27-4 Unit 139N

San Juan 27-4 Unit 140B

San Juan 27-4 Unit 141M

San Juan 27-4 Unit 147Y

San Juan 27-4 Unit 153B

Carrouan 27 4 Onic 1000

San Juan 27-4 Unit 22M

San Juan 27-4 Unit 38P

San Juan 27-4 Unit 41N

San Juan 27-4 Unit 42N

San Juan 27-4 Unit 569N

San Juan 27-4 Unit 59N

San Juan 27-4 Unit 60M

San Juan 27-5 Unit 113F

San Juan 27-5 Unit 59N

San Juan 27-5 Unit 84N

San Juan 27-5 unit 901

San Juan 27-5 Unit 902

San Juan 27-5 Unit 903

San Juan 27-5 Unit 904

San Juan 27-5 Unit 905

San Juan 27-5 Unit 906

San Juan 27-5 Unit 907

San Juan 27-5 Unit 908

San Juan 27-5 Unit 909

San Juan 27-5 Unit 910

San Juan 27-5 Unit 912

San Juan 27-5 Unit 913

San Juan 27-5 Unit 914

San Juan 27-5 Unit 915

San Juan 27-5 Unit POW 916

San Juan 28-4 Unit 27M

San Juan 28-5 Unit 54F

San Juan 28-5 Unit 62E

San Juan 28-5 Unit 63M

San Juan 28-5 Unit 76N

San Juan 28-5 Unit 77N

San Juan 28-6 Unit 113N

San Juan 28-6 Unit 459S

San Juan 28-7 Unit 151E

San Juan 28-7 Unit 195P

San Juan 29-6 Unit 22N

San Juan 29-6 Unit 8M

San Juan 29-7 Unit 30N

San Juan 29-7 Unit 57E

San Juan 29-7 unit 587

San Juan 29-7 Unit 588

San Juan 29-7 unit 589

San Juan 29-7 Unit 60N

San Juan 29-7 unit 67M

San Juan 29-7 Unit 70M

San Juan 30-5 Unit 27F

San Juan 30-5 Unit 71F

San Juan 30-5 Unit 73N

San Juan 30-6 Unit 441S

San Juan 31-6 Unit 24F

San Juan 31-6 Unit 27M

San Juan 31-6 Unit 31P

San Juan 31-6 Onic 31F

San Juan 31-6 Unit 39M

San Juan 31-6 Unit 3M

San Juan 31-6 Unit 45N

San Juan 31-6 Unit 49P

San Juan 31-6 Unit 4N

San Juan 31-6 Unit 4P

San Juan 31-6 Unit 6F

San Juan 31-6 Unit 7M

San Juan 31-6 Unit 8N

San Juan 32-7 Unit 18M

San Juan 32-7 Unit 19A

San Juan 32-7 Unit 71A

San Juan 32-7 Unit Com 20

San Juan 32-8 Unit 18N

San Juan 32-8 Unit 30M

San Juan 32-8 Unit 49M

Storey B LS 100

Storey B LS 100S

Sunray E 221S

Sunray G 2C

Vaughn 15N

Wood 3M

Wood 3N

Crystal L. Tafoya Regulatory Technician ConocoPhillips Company San Juan Business Unit Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102 Revised October 12, 2005 Submit to Appropriate District Office State Lease - 7 Copies Fee Lease - 3 Copies

☐ AMMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1 A	PI Number		2	Pool Code		³ Pool Name BASIN DAKOTA					
⁴ Property Coo	ie					⁶ Well Number 279E					
⁷ OGRID N	о.		BURL	INGTON	8 Operator Name 9 Elevation ON RESOURCES OIL AND GAS COMPANY LP 6529						
					10 SURFACE	LOCATION					
UL or lot no.	Section 14	Township 25-N	Range 6-W	Lot Idn	Feet from the 1610	North/South line SOUTH	East/West line EAST	County RIO ARRIBA			
			¹¹ E	ottom H	ole Location	If Different From	m Surface				
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County		
Dedicated Acres 320.00	13 Joint	or Infill	Consolidation	Code 15	Order No.						

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

E/2 DEDICATE SF-0i SECTI T-25-N,	78884 ON 14	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. Signature
WELL FLA	83 N & 3 W no	Printed Name Title and E-mail Address Date 18 SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from felid notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.
LAT: 36°23.831982' LONG: 107°25.887620'	1205'	Date of Survey: 9/04/07 Signature and Seal of Professional Surveyor: PROADHURS: MEX. 1593 1594 1595
S 89'40' W S 89'25'17" W	5281.5, (W) 5281.5, (W) 7 288.2, (W)	Certificate Number: NM 11393

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- · Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300.1	(1000)500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.