District I 1625 N French Dr , Hobbs, NM 88240

District II

1301 W. Grand Ave , Artesia, NM 88210

District III

1000 Rio Brazos Rd, Aztec, NM 87410

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe. NM 87505

State of New Mexico

Energy Minerals and Natural Resources

Form C-144 July 21, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe

<u>District IV</u> 1220 S. St. Francis Dr., Santa Fe, NM 87505	Santa 1 e, 1 ti		Environmental Bureau officappropriate NMOCD Distr	ice and provide a copy to the rict Office
1 A O A	it, Closed-Loop Systered Alternative Method			ation
Type of action: X Instructions: Please submit one applications and the submit of the	Permit of a pit, closed-loop sy. Closure of a pit, closed-loop sy. Modification to an existing pe Closure plan only submitted for below-grade tank, or proposed	stem, below-grade ta ystem, below-grade t rmit or an existing permitt alternative method idual pit, closed-loo iability should operations re	nk, or proposed alternate ank, or proposed alternated or non-permitted pit proposed or non-permitted pit proposed alternated pit proposed or non-permitted pit proposed propos	tive method ative method , closed-loop system, tank or alternative request tet, ground water of the
Operator: Burlington Resources Oil &	Gas Company, LP		OGRID#: 14538	
Address: PO Box 4289, Farmington, N	M 87499			
acility or well name: Huerfanito Unit	81G			
API Number: 30-04	15-34410	OCD Permit Number	er·	
U/L or Qtr/Qtr: F(SENW) Section: Center of Proposed Design: Latitude: Surface Owner: Federal	11 Township: 26N 36.50466' N State X Private	Range: Longitude: Tribal Trust or Indian	9W County: San 107.76102' W n Allotment	n Juan NAD: 1927 X 1983
Temporary X Drilling Workove Permanent Emergency Cavit X Lined Unlined Liner X String-Reinforced Liner Seams: X Welded X Factor	ation P&A type: Thickness 20 mi		HDPE PVC O	ther
	notice of is teel Tanks Haul-off Bins be: Thickness mil	ntent)	HDPE PVD Oth	RECEIVED
Below-grade tank: Subsection I of Volume: bbl Tank Construction material: Secondary containment with leak detection Visible sidewalls and liner Liner Type: Thickness	Type of fluid: On Visible sidewalls, lii	Other	omatic overflow shut-off	OIL CONS DIV. DIST.
Alternative Method: Submittal of an exception request is require	d Exceptions must be submitted to	o the Santa Fe Environ	mental Bureau office for c	consideration of approval

Fencing: Subsection D of 19.15 17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution of the light, four strands of barbed wire evenly spaced between one and four feet Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other Monthly inspections (If netting or screening is not physically feasible) Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers	tution or chur	c.h)
X Signed in compliance with 19.15.3.103 NMAC		
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval.	deration of ap	proval.
Siting Criteria (regarding permitting): 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.		
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - IWATERS database search; USGS; Data obtained from nearby wells	Yes	XNo
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	XNo
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	NA	
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	_	
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	Yes XNA	No
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	XNo
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.		1
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality, Written approval obtained from the municipality	Yes	XNo
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	XNo
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes	XNo
Within a 100-year floodplain - FEMA map	Yes	XNo

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC
Instructions: Each of the following terms must be attached to the application Please indicate, by a check mark in the box, that the documents are attached Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
Tydrogeologic Report (Below-graue Panks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC X Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9
Tryatogeologic Pata (Temporary and Emergency Fits) Vasce upon the requirements of 19.15.17.10 NMAC
X Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of
19.15.17.9 NMAC and 19.15.17.13 NMAC
Previously Approved Design (attach copy of design) API or Permit
12
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19 15 17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9
NMAC and 19.15 17.13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
Permanent Pits Permit Application Checklist: Subsection B of 19 15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15.17.10 NMAC
Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19.15.17 11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
Quality Control/Quality Assurance Construction and Installation Plan
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
☐ Emergency Response Plan ☐ Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC
14
Proposed Closure: 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
Type: XIDrilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative
Proposed Closure Method Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
X In-place Burtal On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
15
Waste Excavation and Removal Closure Plan Checklist: (19 15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan.
Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17 13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19 15.17 13 NMAC

Form C-144 Oil Conscivation Division Page 3 of 5

16 Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel	Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC)				
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fl are required	uids and drill cuttings Use attachment if more than two fo	icilities			
Disposal Facility Name:	Disposal Facility Permit #:				
,	Disposal Facility Permit #:				
Will any of the proposed closed-loop system operations and associated activities Yes (If yes, please provide the information No	occur on or in areas that will not be used for future so	ervice and operatio	ns?		
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subsection Site Reclamation Plan - based upon the appropriate requirements of Subsection Plan - based upon the ap	on I of 19.15.17.13 NMAC				
17					
Siting Criteria (Regarding on-site closure methods only: 19.15 17.10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan Recertain siting criteria may require administrative approval from the appropriate district office or for consideration of approval Justifications and/or demonstrations of equivalency are required	may be considered an exception which must be submitted to the				
Ground water is less than 50 feet below the bottom of the buried waste		= -	No		
- NM Office of the State Engineer - tWATERS database search; USGS: Data obtain	ed from nearby wells	∐N/A			
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes X	No		
- NM Office of the State Engineer - IWATERS database search; USGS; Data obtain	ed from nearby wells	□N/A			
Ground water is more than 100 feet below the bottom of the buried waste.		X Yes]No		
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained	ed from nearby wells	□N/A			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant (measured from the ordinary high-water mark).	nt watercourse or lakebed, sinkhole, or playa lake	Yes X]No		
- Topographic map; Visual inspection (certification) of the proposed site			,		
Within 300 feet from a permanent residence, school, hospital, institution, or church in ex - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	istence at the time of initial application	Yes X	No ,		
		Yes X	No		
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existen - NM Office of the State Engineer - iWATERS database, Visual inspection (certificat	ce at the time of the initial application.				
Within incorporated municipal boundaries or within a defined municipal fresh water well pursuant to NMSA 1978, Section 3-27-3, as amended.		Yes X]No		
- Written confirmation or verification from the municipality; Written approval obtain Within 500 feet of a wetland	. ,	Yes X]No		
- US Fish and Wildlife Wetland Identification map; Topographic map, Visual inspec	tion (certification) of the proposed site	□v 5v	1.,		
Within the area overlying a subsurface mine. - Written confirantion or verification or map from the NM EMNRD-Mining and Min	neral Division	Yes X	JNO		
Within an unstable area.		Yes X	No		
- Engineering measures incorporated into the design, NM Bureau of Geology & Mine	eral Resources; USGS; NM Geological Society,		·		
Topographic map Within a 100-year floodplain FEMA map		Yes X]No		
18					
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of by a check mark in the box, that the documents are attached.	the following items must bee attached to the closure	e plan. Please ind	icate,		
X Siting Criteria Compliance Demonstrations - based upon the appropriate r	equirements of 19.15.17.10 NMAC				
X Proof of Surface Owner Notice - based upon the appropriate requirements	of Subsection F of 19.15.17.13 NMAC				
Construction/Design Plan of Burial Trench (if applicable) based upon the	appropriate requirements of 19.15.17.11 NMAC				
Construction/Design Plan of Temporary Pit (for in place burial of a drying	pad) - based upon the appropriate requirements of 19	15 17 11 NMAC			
Protocols and Procedures - based upon the appropriate requirements of 19	15.17.13 NMAC				
Confirmation Sampling Plan (if applicable) - based upon the appropriate r					
Waste Material Sampling Plan - based upon the appropriate requirements					
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and	-	not be achieved)			
X Soil Cover Design - based upon the appropriate requirements of Subsection Re-vegetation Plan - based upon the appropriate requirements of Subsection					
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19 15.17.13 NMAC X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC					

19 <mark>Opera<u>tor Application (</u></mark>	Certification:		
	ormation submitted with this application is true,	accurate and complete to th	ne best of my knowledge and belief
Name (Print):	Crystal Tafoya	Title:	Regulatory Technician
Signature	to talena	Date:	10/3/08
e-mail address:	crystal tafoya@conocophalips.com	Telephone	505-326-9837
e man address.			
	remit Application (including closure plan)	W.	OCD Conditions (see attachment) Approval Date: //-3-08
l'itle: <u>E</u> n	vin spec	OCD Per	rmit Number:
Instructions: Operators are eport is required to be sub		tor to implementing any clo pletion of the closure activit en completed.	osure activities and submitting the closure report. The closure ties. Please do not complete this section of the form until an
		Closu	re Completion Date:
Closure Method: Waste Excavation a	and Removal On-site Closure Method	d Alternative Closu	re Method Waste Removal (Closed-loop systems only)
23			
	g Waste Removal Closure For Closed-loop Sys fy the facility or facilities for where the liquids,		Ground Steel Tanks or Haul-off Bins Only: ttings were disposed. Use attachment if more than two facilities
Disposal Facility Name:	:	Disposal Facili	ity Permit Number:
Disposal Facility Name:		-	aty Permit Number:
•	stem operations and associated activities perform	·····	
	demonstrate complilane to the items below)	No	· · · · · · · · · · · · · · · · · · ·
Required for impacted of	areas which will not be used for future service an	nd operations:	
	Photo Documentation)		
Soil Backfilling and	d Cover Installation		
Re-vegetation Appl	lication Rates and Seeding Technique		
24 Closure Report Atta		following items must be a	ttached to the closure report. Please indicate, by a check mark in
Proof of Closure l	Notice (surface owner and division)		
Proof of Deed No	tice (required for on-site closure)		
Plot Plan (for on-s	site closures and temporary pits)		
Confirmation San	npling Analytical Results (if applicable)		
	ampling Analytical Results (if applicable)		
=	Name and Permit Number		
	nd Cover Installation		
	plication Rates and Seeding Technique		
	(Photo Documentation)		
On-site Closure L		Longitude	NAD 1927 1983
25			
Operator Closure Certify that the infe		•	te and complete to the best of my knowledge and belief. I also certify that I closure plan.
Iame (Print):		Title:	
ignature		Date:	
-mail address		Telephone:	


New Mexico Office of the State Engineer POD Reports and Downloads


Township: 26N	Range: 09	W Sections:			
NAD27 X:	Y:	Zone:		Search Radius:	
County:	Basin:	4		Number:	Suffix:
Owner Name: (First)		(Last)	i	○ Non-Domestic	ODomestic
POD / S	Surface Data Re	port Av Water Column Repo		to Water Report	
	Clear Form	į į į į į į į į į į į	enu	Help	

WATER COLUMN REPORT 10/01/2008

(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Depth Depth Wat∈ POD Number Tws Rng Sec q q q Well Zone х Colum Water 26N 09w 01 2 2 3 SJ 02961 1500 09W 01 3 2 3 SJ 02962 26N 1500 3 09W 11 2 2 3 SJ 01756 26N 75 40 SJ 03811 POD1 26N 09W 12 348 175 17 26N 09W 16 SJ 00412 202 65 13 SJ 00214 26N 09W 26 2 4 2 230 71 946 26N 09W 26 4 2 1 215 27 SJ 00064 490 SJ 00063 26N 09W 26 4 2 3 479 234 24

Record Count: 8

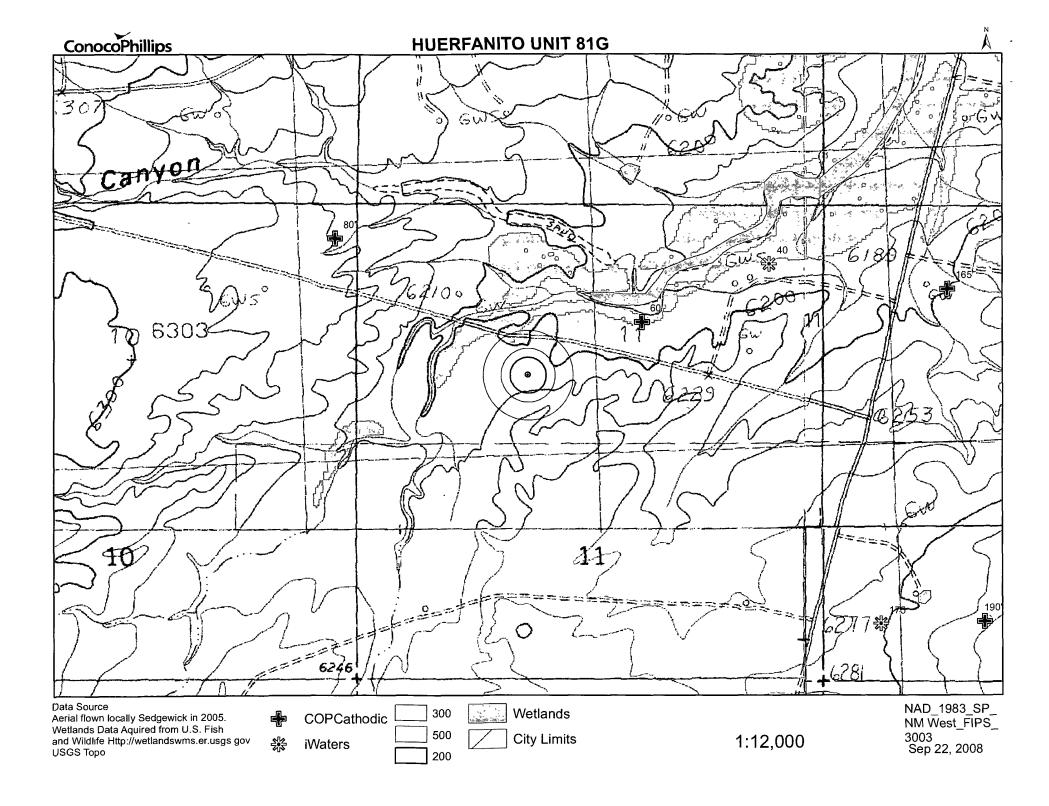

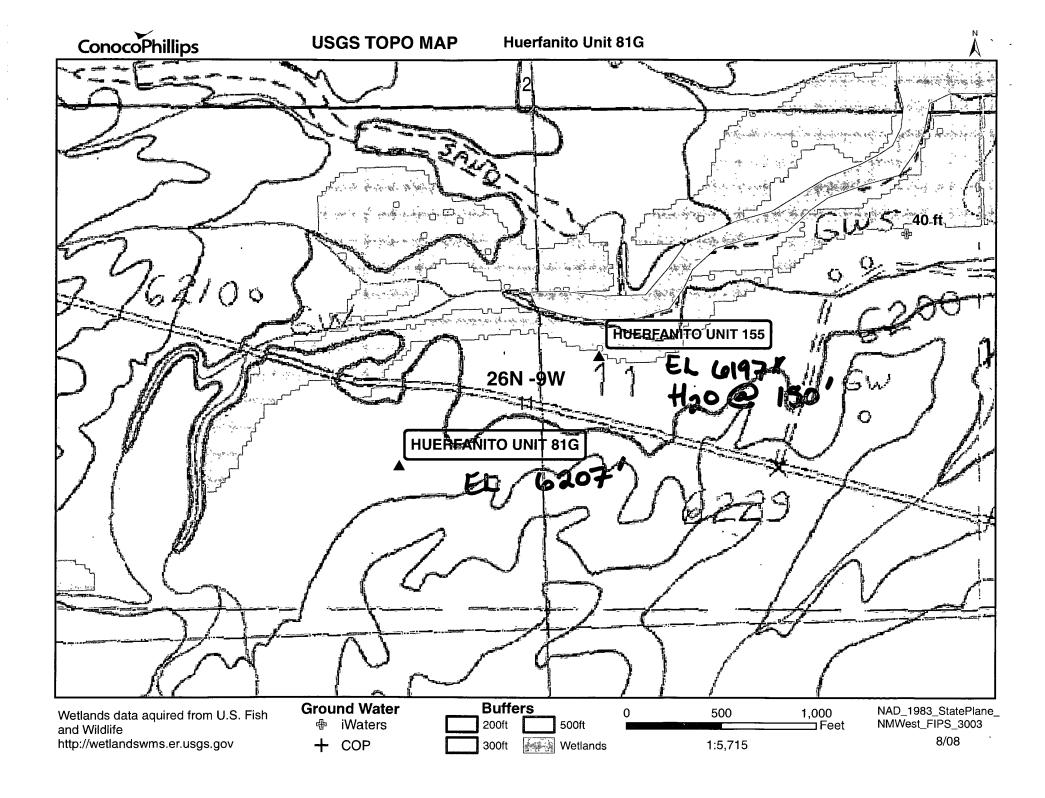

30-045-29432

DATA SHEET FOR DEEP GROUND BED CATHODIC. PROTECTION WELLS NORTHWESTERN NEW MEXICO

90690	6\$366A	07/0763-30
Operator Burling ton Resource	PS Location: Unit	Sec. 11 Twp 26 Rng 9
Name of Well/Wells or Pipeline Ser		
•		
ElevationCompletion Date 7-/:		
Casing Strings, Sizes, Types & Dep	oths $3''$ PVC \times	201
	•	
If Casing Strings are cemented, sh	now amounts & types	used 4 Bags Portland
If Cement or Bentonite Plugs have	been placed, show d	epths & amounts used
Depths & thickness of water zones	with description of	water: Fresh, Clear,
Salty, Sulphur, Etc. 150' See	ρ	
Depths gas encountered: Mone		
Ground bed depth with type & amount Loresco Sw coke breeze	nt of coke breeze us	ed: 300' - 1800 lbs
Depths anodes placed: 290, 280, 2	250, 243, 236, 22	9, 222, 215
Depths vent pipes placed: 300	, E E	EINEU
Vent pipe perforations: Bottom	150' M FEB	2 5 1398
Remarks:	;	ou. DIV.
,	~ ~ ~	M. 3 .

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

Weel CPS#

	IOCATION	V: C-	11-2	to # 6-9			COUNT	Y: San	JUGA		1	
ATE	7-15-	a 7					TYPE C	F COKE:	Locasi	0 54	<u>:</u> س	
	: 300						AMT. O	F COKE B	ACKFILL:	1200	165	
	E: 63							IPE: 30		7 - 2 1 1 1 H		
	R NAME:		1 pdl	ittec				PIPE: Bo		501		
IZE A	ND TYPE O	OF CASIN	1G: 0"	PVI			ANODE	AMT. & T	YPE: And	te-D	Duricon	
_				<u> </u>			BOULD	ER DRILLI	NG:			
EPTH		T	DEPTH	T		DEPTH		T.			ORMATIO	N:
т.	LOG	ANODE	FT.	LOG :	ANODE	FT.	LOG	ANODE	WATER D	EPTHS:	150'	
			1						ISOLATIC	N PLUG	S: ∫	
00			265	1.0		430					1	
05			270	18		435					OUTPUT	
10			275	1.4	2	440			ANODE#		NO COK	
15			280	1.4		445			1	290	1,7	3.7
20			285	1.4		450			2	280	110	3:5
25			290	1.7	1	455			3	250	26	5.7
30			295	2,2		460			4	243	3.1	6.8
35			300	T,D,		465			5	236	3.0	6.4
40			305			470			6	229	311	6.5
45			310			475			7	aaa.	<i>કેન્ટ્ર</i>	6.4
50			315			480			8	215	3.0	6.0
55			320			485			9			
160	44		325			490			10			
65	2.5		330			495			11			ļ
170	2.6		335			500			12			
175	2.7		340		<u> </u>	505			13			<u> </u>
180	2.8		345		<u> </u>	510	<u> </u>		14	ļ	!	<u> </u>
185	3.0		350		<u> </u>	515			15			
190	2.4		355		<u> </u>	520	<u> </u>		16			
195	1.6		360		↓	525	ļ		17		}	<u> </u>
200	1,4	<u> </u>	365	┩——	<u> </u>	530	+		18	<u> </u>		<u> </u>
205	18	 	370		↓	535	+		19	ļ		
210	3.1	+	375		↓ —	540	_		20	 _	 	
215	34	8	380		<u> </u>	545			21	 	 	
220	3.3		385		 	550	- 		22	}	+	
225	3.4	1-7	390		+	555 560	+		23		 	
230 235	3.5	10	395 400		 	565	+	- 	25	 	 	 -
235 240	3,3	5	400	-	╁	570	+	- 	26	 		
240 245	3.2	+	410		 	575	 		27	 		
250		4 3	415	+	+	580	+		28	 	+	+
255	13.5	╀╌╌	420		+	585	+	- 	29	 	+	
260	1,0	1	425		 	590	+	+	30	 	 	1
	- 1"	1	+	+	+	595	+		+	 	+	+
LOGIN	IG VOLTS:	11	27		VOLTA	GE SOUF	RCE: A	// 6	-l	<u></u>		
	L AMPS:	18			TOTAL	G/B RES	ISTANCI	E: 16	ວ			
REMA		1.8	4			J. J . (LO			<u> </u>			

Form 3160-4 (October 1990)

UNITED STATES DEPARTMENT OF THE INTERIOR

SUBMIT IN DUPLICATE (See other in-


FOR APPROVED OMB,NQ/1004-0137

		BL. A	IRFAU OF LAN	D MANAGEMEI	NT		T	5 LEASE C		NAND SERIAL NO
					••			SF	-078388	
WELL C	OMPL	TION OR F	RECOMPL	ETION RE	PORT ANI) LO	G*	6 IF INDIA	N. ALLOTTER	OR TRIBE NAME
1a TYPE OF	WELL.	OIL	GAS X	DRY Other						
						 ,	T		REEMENT N	· · · · · ·
g TABE OF	NEW V WORK OFFP. PLUG OFF						<u> </u>		rfanito Un	ME, WELL NO.
	MET X	OVER DEEP-	PLUG BACK	RESVR			1	B. FARM O	K LEASE NAI	ME, WELL NO.
									rfanito Uni	1 #155
2 NAME OF							1	9 API WEL		
	S AND TELE	RESOURCES O	L & GAS COMP	ANY					045-29432 AND POOL, C	
		, Farmington, NM	87499 (505	5) 326-9700			l		in Fruitland	
		(Report location clear		ce with any State re	quirements)*	200	(3 E)		• • • • • • • • • • • • • • • • • • • •	BLOCK AND SURVEY
At surface		1310'FNL, 2255'	FEL	[D]				OR AF	REA	
At top pro	od interval rep	ported below		IN.	1 108 4.3	1397	リリ			
At total de	epth			<u>, </u>	יוטע ב	(00)		ß Sec	. 11, T-26-	-N, R-9-W
			ET.	I. PERMIT NO (VIIIA TENEDI		W.	12 COUN	TV OP	13 STATE
			Ι''	I. PERMIT NO (ا ۱۳۵۵	PARIS		is sixie
			!		DES	i. 3		Sar	Juan	New Mexico
15 DATE SPU	JDDED 16	DATE T D REACHED		MPL (Ready to proc	1)	1	VATIONS (DF, RKE		TC)	19. ELEV, CASINGHEAD
4-7-97		4-9-97	5-22 ACK T.D. MD &TVD		COUR		6197 GR, 6211 RVALS R			
20 TOTAL DE	PIN MUSIV	21 PLUG, 8	ACK ID, MD &IVD		MANY		LLED BY	ROTARY TO	OLS	CABLE TOOLS
2142						L _		0-2	142	Į
24 PRODUCT	TION INTERVA	L (S) OF THIS COMPLI	ETION-TOP, BOTTO	M, NAME (MD AND T	VD)*			25.	WAS DIRECT	
1738-19	08 Fruitlan	d Coal							SURVEY MA	NUE
		THER LOGS RUN					2	7 WAS WE	LL CORED	
HRI, SI	DL/DSN							No		
28					D (Report all string					
CASING SIZ	E/GRADE	WEIGHT, LB./FT	DEPTH SET (MD	HOLE SIZE	149 cu.ft.	MENT CE	MENTING RECOR	10	AN	OUNT PULLED
8 5/8		10.5#	146 2139	6 1/4	434 cu.ft.					
				 						
										•
29		LINER RE			30				G RECORD	
SIŽE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT	SCREEN (MD	1 1/2 SIZE		DEPTH SET (M 1857	(D)	CKER SET (MD)	
	 	 			1 1/2		1037			
31 PERFORA	ATION RECOR	ID (Interval, size and nu	mber)	32	A	CID, SHO	T, FRACTURE, (CEMENT S	QUEEZE. E	TC.
1738-17	740, 1744-1	746, 1748-1755, 1	760-1762,	DEPTH IN	ITERVAL (MD)				ND OF MATE	
1800-18	814, 1850-1	856, 1866-1870, 1	886-1908	1738-1	814		ol 30# linear ge	1, 65.560	# 20/40 Ar	riz sd
				1850-1	OOR		00 SCF N2 bl 30# linear ge	N 80 000	H 20/40 0	riz od
				1030-	300		00 SCF N2	30,000	# 20/40 AI	12.30
33					PRODUCTION					
5-22-97		PRODU	CTION METHOD (FIG Flowing	iwing, gas lift, pumpin	g-size and type of p	ump)		WE	LL STATUS (Producing or shut-in)
DATE OF TEST		HOURS TESTED			-88L	GAS-	MCF	WATER-	3BL	GAS-OIL RATIO
5-22-97	,		1	EST PERIOD		150 P	itot Gauge	}		
FLOW TUBING	PRESS.	CASING PRESSURE	CALCULATED	OIL-BBL	GAS-MCF		WATER-BBL			OIL GRAVITY-API (CORR)
SI 150		SI 150	24-HOUR RATE		1	- 1				
	TION OF GAS	(Sold, used for fuel, ven.	ted etc.)					TE	ST WTNESS	ED BY
35 LIST OF A	ATTACHMENT	To be sold								
	a : - :	None								
36 1 bereby c	certury that the fi	oregoing and attached in	mormation is complet	e and correct as dele	HISVS ILS MOTE Denum	ncoen elde				
SIGNED /	Man.	Stud pu	Ld mi	E Regulatory A	dministrator		A	C CE	TED F	OR RECORD


*(See Instructions and Spaces for Additional Data on Reverse Side) JUN 1 2 1997


Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department of agency of the 1 2 1997


United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

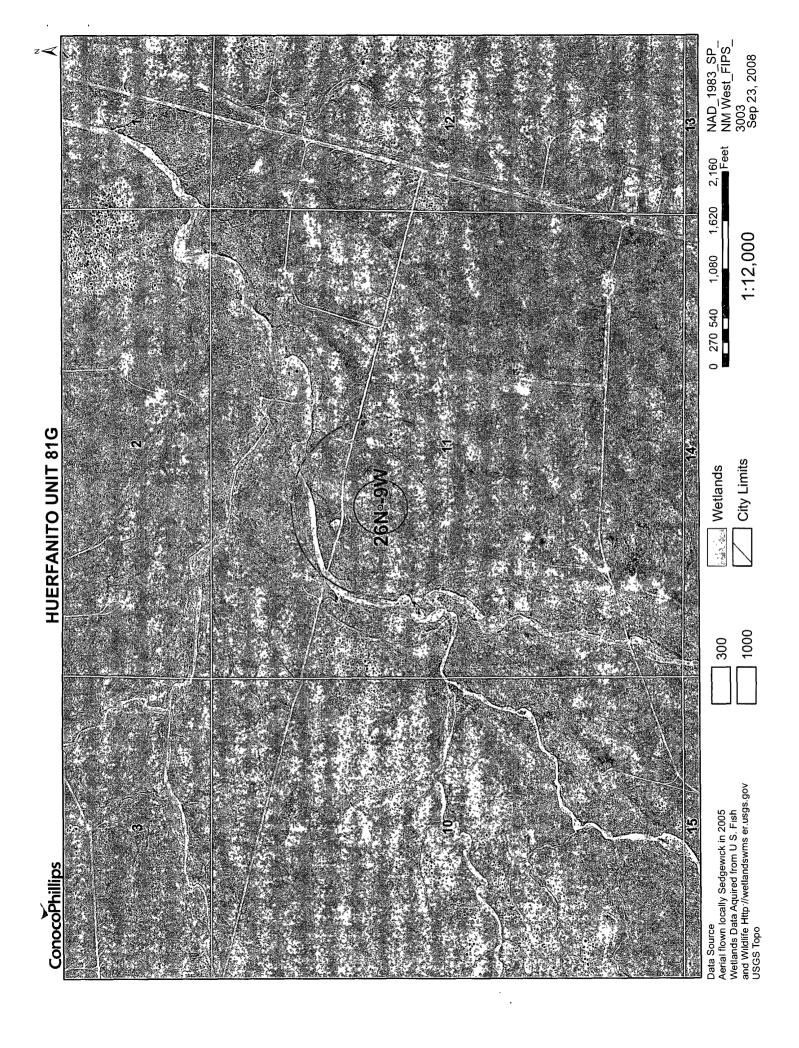


Huerfanito Unit 81G Mines, Mills and Quarries Web Map

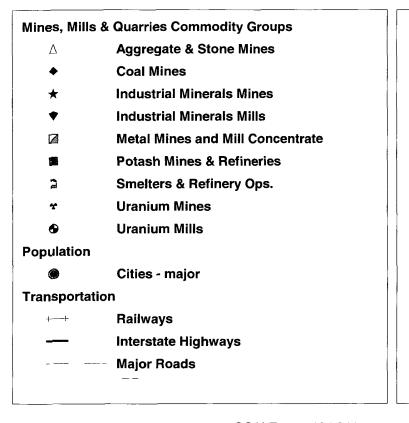

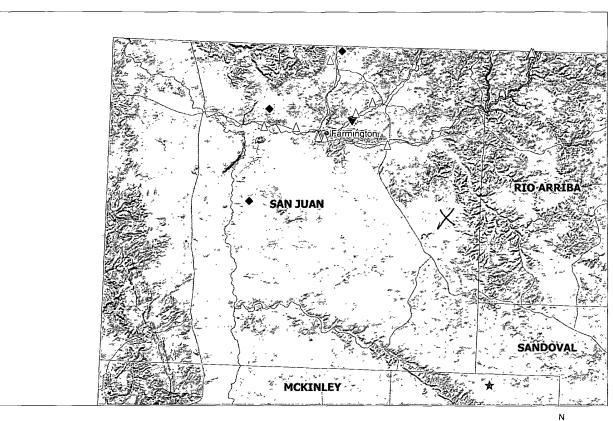





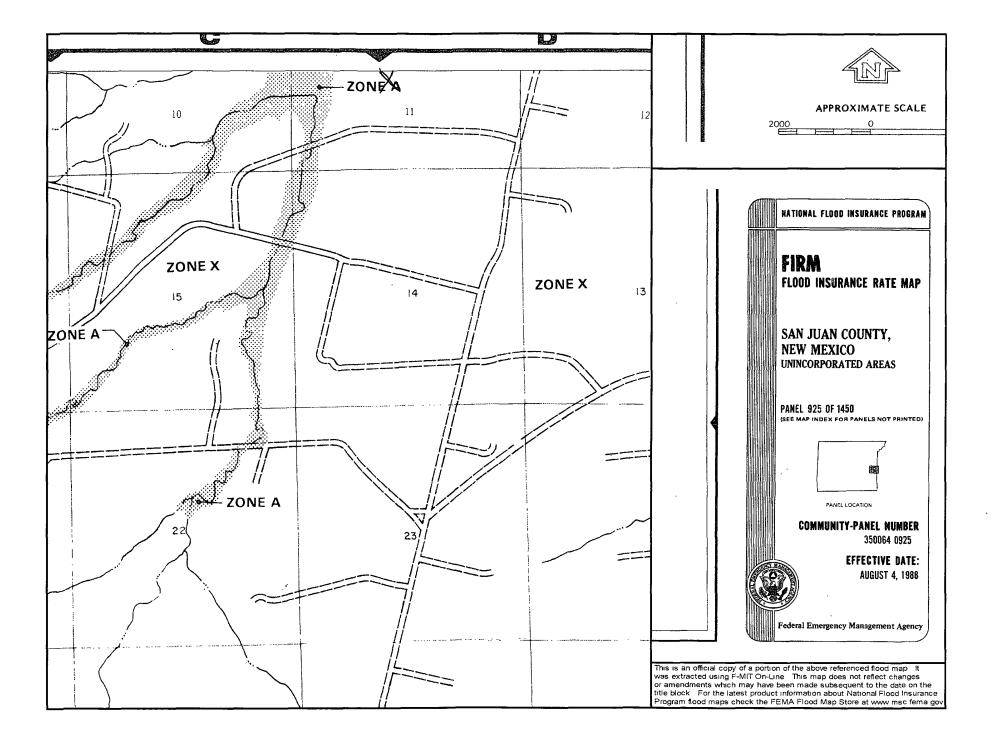

Hydrogeological Report for Huerfanito Unit 81G

Regional Geological context:

The Nacimiento Formation is of Paleocene age (Baltz, 1967, p. 35). It crops out in a broad band inside the southern and western margins of the central basin and in a narrow band along the west face of the Nacimiento Uplift. The Nacimiento is a nonresistant unit and typically erodes to low, rounded hills or forms badland topography.

The Nacimiento Formation occurs in approximately only the southern two-thirds of the San Juan Basin where it commformably overlies and intertongues with the Ojo Alamo Sandstone (Fassett, 1974, p. 229). The Nacimiento Formation grades laterally into the main part of the Animas Formation (Fassett and Hinds, 1971, p. 34); thus, in this area, the two formations occupy the same stratigraphic interval.

Strata of the Nacimiento Formation were deposited in lakebeds in the central basin area with lesser deposition in stream channels (Brimhall, 1973, p. 201). In general, the Nacimiento consists of drab, interbedded black and gray shale with discontinuous, white, medium- to very coarse grained arkosic sandstone (Stone e al., 1983, p.30). Stone et al. indicated that the formation may contain more sandstone than commonly reported because some investigators assume the slope-forming strata in the unit area shales, whereas in many places the strata actually are poorly consolidated sandstones. Total thickness of the Nacimiento Formation ranges from about 500 to 1,300 feet. The unit generally thickens from the basin margins toward the basin center (Steven et al., 1974). The sandstone deposits within the Nacimiento Formation are much thinner than the total thickness of the formation because their environment of deposition was localized stream channels (Brimhall, 1973, p. 201). The thickness of the combined San Jose, Animas, and Nacimiento Formations ranges from 500 to more than 3.500 feet.

Hydraulic Properties:

Reported well yields for 53 wells completed in either the Animas or Nacimiento Formations range from 2 to 90 gallons per minute and the median yield is 7.5 gallons per minute. The primary use of water from Nacimiento and Animas Formations is domestic and livestock supplies. There are no known aquifer tests for the Animas or Nacimiento Formations, but specific capacities reported for six wells range from 0.24 to 2.30 gallons per minute per foot of drawdown (Levings et al., 1990).

The Animas and Nacimiento Formations are in many ways hydrologically similar to the San Jose Formation because sands in both units produce approximately the same quantities of water. However, the greater percentage of fine materials in the Animas and Nacimiento Formations may restrict downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented fine material is highly erodible, forms a badland terrain, and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

References:

Baltz, E.H., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous rocks, east-central San Juan Basin, New Mexico: USGS Professional Paper

552, 101 p.

Brimhall, R.M., 1973, Ground-water hydrology of Tertiary rocks of the San Juan Basin, New Mexico, in Fassett, J.E., ed., Cretaceous and Tertiary rocks of the Southern Colorado Plateau: Four Corners Geological Society Memoir, p. 197-207.

Fassett, J.E., 1974, Cretaceous and Tertiary rocks of the eastern San Juan Basin, New Mexico and Colorado, in Guidebook of Ghost Ranch, central-northern New Mexico: New Mexico Geological Society, 25th Field Conference, p. 225-230.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: USGS Professional Paper 676, 76 p.

Levings, G.W., Craigg, S.d., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan structural basin, New Mexico, Colorado, Arizona, and Utah: USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Huerfanito Unit 81G is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 100' as determined by the topographic map and the Cathodic well data from the Huerfanito Unit 155 with an elevation of 6197' and groundwater depth of 150'. The subject well has an elevation of 6207' which is slightly greater than the Huerfanito Unit 155, therefore the groundwater depth is greater than 100'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The Cathodic data provided the indication of groundwater depth is greater than 100'. The hydro geologic analysis indicates the groundwater depth and the Nacimiento formation will create a stable area for this new location.



ConocoPhillips Company GRFS / PTRRC – San Juan Business Unit Juanita Farrell 3401 East 30th Street Farmington, NM 87402 Telephone: (505) 326-9597

Telephone: (505) 326-9597 Facsimile: (505) 324-6136

July 29, 2008

VIA CERTIFIED MAIL – RETURN RECEIPT REQUESTED 71106605959000260265

Lydia A Chavez PO Box 358 Blanco, NM 87412-0358

Subject:

Huerfanito Unit 81G

NW Section 11, T26N, R9W San Juan County, New Mexico

Dear Landowner:

Pursuant to Paragraph 1 (b) of Subsection F of 19.15.17.13 NMAC, an operator shall provide the surface owner of the operator's proposal to close a temporary pit on-site in compliance with the on-site closure methods specified in the same Subsection of the NMAC. In compliance of this requirement, please consider this notification of ConocoPhillips' intent to close the temporary pit on the above referenced location.

If you have any questions, please contact Steven Gillette @ (505) 326-9883.

Sincerely,

Juanita Farrell

Juanita Farrell Staff Associate, PTRRC District I 1625 N. French Dr., Hobbs, NM 88240 State of New Mexico Form C-102
Revised October 12, 2005
Instructions on back
bropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies Energy, Minerals & Natural Resources Department District II 1301 W. Grand Avenue, Artesia, NM 88210 OIL CONSERVATION DIVISION FOR District III 1000 Rio Brazos Rd., Aztec. NM 87410 1220 South St. Francis Dr. Santa Fe, NM 87505 AUG 2 8 2007. District IV 1220 S St Francis Cr., Santa Fe. NM 87505 Bureau of Land Management AMENDED REPORT Farmington Field Office WELL LOCATION AND ACREAGE DEDICATION PLAT 30-045- 12 34411 71599 BASIN DAKOTA Property Code Well Number Property Name HUERFANITO UNIT 81G 7138 OGRID No. *Operator Name Elevation 14538 BURLINGTON RESOURCES OIL & GAS COMPANY, LP 6207 ¹⁰ Surface Location UL or Jot no. Section Feet from the North/South line East/West line Feet from the F 11 26N 9W 1910 **NORTH** SAN JUAN 1930 WEST 11 Bottom Hole Location If Different From Surface La or lot no East/Mest Time 17 Dedicated Acres S Joint or Infall A Consulidation Code Order No. 320.0 Acres (N/2) NC ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION "OPERATOR CERTIFICATION 5192.22 I hereby centry that the information contained herean is true and complete to the test of my knowledge and belief, and that this organization either dwars a working interest or unlessed mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an energ of such a sumeral or working interest. Or to a voluntary pooling agreement or a compulsory pooling order heretogore entered by the division. LAT: 36.50466 N LDNG: 107.76102 W DATUM: NADB3 <u>a</u> LAT. 36 30.2789 N LONG: 107 45.6244 W DATUM: NAD27 LEASE USA SF-078388 andio Signature Kandis Roland 1930 665 Printed Name 130 "SURVEYOR CERTIFICATION I horeby centify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief 8 527 Date of Survey: JUNE 19, 2007. Signature and Sea) of Professional Surveyor SON C. EOWARD SEM MEXICO W. WENCH A OFESSION DWARDS 5198.82

Certificate Number

15269

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- · Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Components Tests Method			
Benzene	Benzene EPA SW-846 8021B or 8260B			
BTEX	BTEX EPA SW-846 8021B or 8260B			
TPH	TPH EPA SW-846 418.1			
GRO/DRO	GRO/DRO EPA SW-846 8015M			
Chlorides	EPA 300.1	(1000)/500		

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

Percent PLS

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

Percent PLS

Source No. two (better quality)

Purity

80 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.