N. French Dr., Hobbs, NM 88240

District II 1301 W Grand Ave, Artesia, NM 88210 District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV 1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico **Energy Minerals and Natural Resources**

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

Form C-144 July 21, 2008

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request Please be advised that approval of this request does not relieve the operator of hability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances. Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538 Address: PO Box 4289, Farmington, NM 87499 Facility or well name: Culpepper Martin 105S 30-045-34407 API Number: OCD Permit Number U/L or Qtr/Qtr: Section: 32N Township: Range: County: Center of Proposed Design: Latitude: 36.95983' N 108.12406' W NAD: 1927 X 1983 Longitude: Surface Owner: State X Private Tribal Trust or Indian Allotment Federal X Pit: Subsection F or G of 19.15.17.11 NMAC Temporary: X Drilling Workover Permanent Emergency Cavitation P&A X LLDPE HDPE PVC Other X Lined Unlined Liner type. Thickness 20 mil X String-Reinforced X Welded X Liner Seams Factory Volume 4400 bbl Dimensions L 65' x W 45' Subsection H of 19.15.17.11 NMAC Closed-loop System: Workover or Drilling (Applies to activities which require prior approval of a permit or Type of Operation: P&A Drilling a new well notice of intent) Other Above Ground Steel Tanks Haul-off Bins Drying Pad Unlined LLDPE HDPE PVD Other Lined Liner type: Thickness mil Liner Seams. Welded Factory Other 2003 Below-grade tank: Subsection I of 19 15.17.11 NMAC OIL CONS. DIV. DIST Volume bbl Type of fluid Tank Construction material: Secondary containment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off 18192027 Visible sidewalls and liner Visible sidewalls only Other Liner Type Thickness HDPE PVC Other Alternative Method:

Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17 11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)							
Chain link are foot in height two strongs of barbed wire of ton (Beguired if lay stad within 1000 foot of a narrow and regulary a school has retail in statistics and beguired in the state of a narrow and regulary a school has retail in statistics and beguired in the state of a narrow and regulary a school has retail in statistics and beguired in the state of a narrow and regulary as school has retail in statistics.							
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)							
Four foot height, four strands of barbed wire evenly spaced between one and four feet							
X Alternate Please specify 4' hogwire fence with a single strand of barbed wire on top.							
7							
Netting: Subsection E of 19.15 17.11 NMAC (Applies to permanent pits and permanent open top tanks)							
Screen Netting Other							
Monthly inspections (If netting or screening is not physically feasible)							
8 Signs: Subsection C of 19.15.17.11 NMAC							
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers							
X Signed in compliance with 19.15.3.103 NMAC							
9							
Administrative Approvals and Exceptions:							
Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance							
Please check a box if one or more of the following is requested, if not leave blank:							
Administrative approval(s) Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons	ideration of ap	proval.					
Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.							
Siting Criteria (regarding permitting): 19.15.17.10 NMAC							
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable							
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the							
appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for							
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria							
does not apply to drying pads or above grade-tanks associated with a closed-loop system.	l						
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.	Yes	X No					
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells							
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa							
lake (measured from the ordinary high-water mark).		٠٠٠٠					
- Topographic map; Visual inspection (certification) of the proposed site							
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	ПYes	XNo					
application.		A No					
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)							
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image							
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	∐No					
(Applied to permanent pits)	XNA						
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image							
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering	Yes	X No					
purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.							
NIM OF CHERLIE I WATERED LA							
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.							
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	Yes	X No					
adopted pursuant to NMSA 1978, Section 3-27-3, as amended							
- Written confirmation or verification from the municipality; Written approval obtained from the municipality Within 500 feet of a method		[VZ]					
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site							
		ĘŪν,					
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	∐Yes	X No					
		(E)					
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological	Yes	XNo					
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map							
Within a 100-year floodplain	Yes	V No					
- FEMA map	L 'es	X No					

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
X Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9
X String Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17.10 NMAC
X Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC
X Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17 9 NMAC and 19.15 17.13 NMAC
Previously Approved Design (attach copy of design) API or Permit
12
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15 17.9
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9
NMAC and 19.15 17.13 NMAC
Previously Approved Design (attach copy of design) API
Previously Approved Operating and Maintenance Plan API
13
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19 15.17.10 NMAC
Climatological Factors Assessment
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19.15 17.11 NMAC
Leak Detection Design - based upon the appropriate requirements of 19.15 17.11 NMAC
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17.12 NMAC
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15 17.11 NMAC
Nuisance or Hazardous Odors, including H2S, Prevention Plan
Emergency Response Plan
Oil Field Waste Stream Characterization
Monitoring and Inspection Plan
Erosion Control Plan
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19 15 17.13 NMAC
14
Proposed Closure: 19.15.17.13 NMAC
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: X Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System
Alternative
Proposed Closure Method Waste Excavation and Removal
Waste Removal (Closed-loop systems only)
X On-site Closure Method (only for temporary pits and closed-loop systems)
XIn-place Burial On-site Trench
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)
15
Waste Excavation and Removal Closure Plan Checklist: (19 15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15 17.13 NMAC
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

Form C-144 Oil Conservation Division Page 3 of 5

16 Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Ste						
Instructions: Please identify the facility or facilities for the disposal of liquids, drilling are required.	y filias and artii cuttings. Ose attachment y more than two je	Kunes				
Disposal Facility Name:	Disposal Facility Permit #:					
Disposal Facility Name.	Disposal Facility Permit #:					
Will any of the proposed closed-loop system operations and associated activitiently Yes (If yes, please provide the information No	es occur on or in areas that will not be used for future so	ervice and opera	ations?			
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate Re-vegetation Plan - based upon the appropriate requirements of Subset Site Reclamation Plan - based upon the appropriate requirements of Su	ate requirements of Subsection H of 19.15.17 13 NMAC ction I of 19.15.17.13 NMAC	đ				
17						
Siting Criteria (Regarding on-site closure methods only: 19 15 17.10 NMA Instructions Each siting criteria requires a demonstration of compliance in the closure plan. certain siting criteria may require administrative approval from the appropriate district office for consideration of approval Justifications and/or demonstrations of equivalency are required.	Recommendations of acceptable source material are provided belo or may be considered an exception which must be submitted to the		nental Bureau office			
Ground water is less than 50 feet below the bottom of the buried waste		Yes	XNo			
- NM Office of the State Engineer - tWATERS database search; USGS: Data obt	ained from nearby wells	∐N/A				
Ground water is between 50 and 100 feet below the bottom of the buried waster	e	Yes	XNo			
- NM Office of the State Engineer - iWATERS database search; USGS; Data obta	ined from nearby wells	□ N/A				
Ground water is more than 100 feet below the bottom of the buried waste.		X Yes	No			
- NM Office of the State Engineer - iWATERS database search; USGS; Data obta	uned from nearby wells	∏N/A	_			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other signific (measured from the ordinary high-water mark).	cant watercourse or lakebed, sinkhole, or playa lake	Yes	XNo			
- Topographic map, Visual inspection (certification) of the proposed site						
Within 300 feet from a permanent residence, school, hospital, institution, or church in - Visual inspection (certification) of the proposed site; Aerial photo; satellite image		Yes	X No			
		Yes	XNo			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site						
Within incorporated municipal boundaries or within a defined municipal fresh water v pursuant to NMSA 1978, Section 3-27-3, as amended.	·	Yes	X No			
 Written confirmation or verification from the municipality, Written approval obt Within 500 feet of a wetland 	amed from the municipality	Yes	X No			
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual insp	pection (certification) of the proposed site		<u> </u>			
Within the area overlying a subsurface mine		Yes	X No			
- Written confiramtion or verification or map from the NM EMNRD-Mining and I	Mineral Division					
Within an unstable area.		Yes	X No			
 Engineering measures incorporated into the design; NM Bureau of Geology & M Topographic map 	ineral Resources; USGS; NM Geological Society;					
Within a 100-year floodplain FEMA map		Yes	X No			
18						
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each by a check mark in the box, that the documents are attached.	of the following items must bee attached to the closur	e plan. Please	indicate,			
X Siting Criteria Compliance Demonstrations - based upon the appropriat	e requirements of 19.15.17.10 NMAC					
X Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15 17 13 NMAC						
Construction/Design Plan of Burnal Trench (if applicable) based upon t	he appropriate requirements of 19.15 17 11 NMAC					
Construction/Design Plan of Temporary Pit (for in place burial of a dry	ing pad) - based upon the appropriate requirements of 19	9.15.17.11 NM	AC			
X Protocols and Procedures - based upon the appropriate requirements of			ŀ			
Confirmation Sampling Plan (if applicable) - based upon the appropriate	•		ľ			
Waste Material Sampling Plan - based upon the appropriate requiremen			l			
☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids a	•	not be achieved	i)			
X Soil Cover Design - based upon the appropriate requirements of Subsective Re-vegetation Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirement Plan - based upon the appropriate requiremen						
X Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17.13 NMAC X Ste Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15 17.13 NMAC						

19				,
Operator Application	Certification: formation submitted with this application is true, accura	ate and complete to the h	est of my knowledge and belief	
Name (Print):	Crystal Tafoya	Title:	Regulatory Technician	
Signature:	1 1 1 7 1 1 1 1	Date:	10/168	
	crystal.tafoya@conocophilips.com	Telephone	505-326-9837	
e-mail address	crystal tardya e conocophimps com	reicphone	303-420-7031	
20				
OCD Approval:	Permit Application (including closure plan)	Closure Plan (only)	OCD Conditions (see attachment)	
OCD Representative S	Signature: Syanglon James	DI .	Approval Date: 1/1/4/	log.
	-			<u> </u>
Title:	in spec.	OCD Perm	it Number:	A variable of the same of the
21	· · ·			
,	red within 60 days of closure completion): Subsec	tion K of 1915 1713 NMAC		
Instructions Operators at	re required to obtain an approved closure plan prior to	implementing any closu	re activities and submitting the closure report.	
1 '	abmitted to the division within 60 days of the completion		. Please do not complete this section of the fort	n until an
approved closure plan nas	s been obtained and the closure activities have been con	· —	Completion Date:	
		Closure	Completion Date:	
22				
Closure Method:			Marked Division N	
Waste Excavation		Alternative Closure	Method Waste Removal (Closed-loop sy	stems only)
If different from a	pproved plan, please explain			
23				
	ng Waste Removal Closure For Closed-loop Systems tify the facility or facilities for where the liquids, drillin			n two facilities
were utilized.	ay the factily or factilities for where the aquilis, article	ig jiuius una ariii cuiii	gs were atsposea. Ose anachment ij more ma	n iwo jucinites
Disposal Facility Name	e·	Disposal Facility	Permit Number:	
Disposal Facility Name	e:	Disposal Facility	Permit Number:	
· —	system operations and associated activities performed or	1	be used for future service and opeartions?	
Yes (If yes, please	e demonstrate complilane to the items below)	No		
	areas which will not be used for future service and ope	rations		
1 =	(Photo Documentation) nd Cover Installation			
	plication Rates and Seeding Technique			
Closure Report Att	achment Checklist: Instructions: Each of the follow	wing items must be atta	ched to the closure report. Please indicate, by	a check mark in
the box, that the docu		o .	•	
I <u>=</u>	Notice (surface owner and division)			
	fotice (required for on-site closure)			
	a-site closures and temporary pits)			l
1 🗏	ampling Analytical Results (if applicable)			
=	Sampling Analytical Results (if applicable)			
l	y Name and Permit Number			
1 = ·	and Cover Installation			
	pplication Rates and Seeding Technique n (Photo Documentation)			
On-site Closure		Longitude:	NAD	1983
On-site Closure	Lanuac.		100	1 1705
25				
Operator Closure Cer	tification:			
	oformation and attachments submitted with this closure	report is ture, accurate	and complete to the best of my knowledge and b	elief. I also certify that
the closure complies with	all applicable closure requirements and conditions spec	cified in the approved c	osure plan	
Name (Print).		Title:		
Comptime				
Signature.		Date:		
e-mail address		Telephone:		

New Mexico Office of the State Engineer POD Reports and Downloads


Township: 3	2N	Range: 12W	Sections:			
NAD27 X:		Y:	Zone:		Search Radius:)
County:		Basin:	- · · · · · · · · · · · · · · · · · · ·	1	Number:	Suffix:
Owner Name: (First)		. (Last) (a) All	(○ Non-Domestic	O Domestic
POD	/ Sun	ace Data Repo	ort Av		Water Report)
Clear Form iWATERS Menu Help						


WATER COLUMN REPORT 10/01/2008

(quarters are 1=NW 2=NE 3=SW 4=SE)

	(quarter	s are	big	gge	st	to	smal.	lest)		Depth	Depth	Wat∈
POD Number	Tws	Rng	Sec	q	Œ	đ	Zone	x	Y	Well	Water	Colum
SJ 01213	32N	12W	18	2	3	4				640	20	62
SJ 01212	32N	12W	18	4	1	3				43	5	3
SJ 03583	32N	12W	23	1	1	1				167	60	1(
SJ 00055	32N	12W	25	2						504		
SJ 02110	32N	12W	28	2	1	4	W	391500	2170000	171	90	3
SJ 01106	32N	12W	35	3	4					180	115	ϵ

Record Count: 6

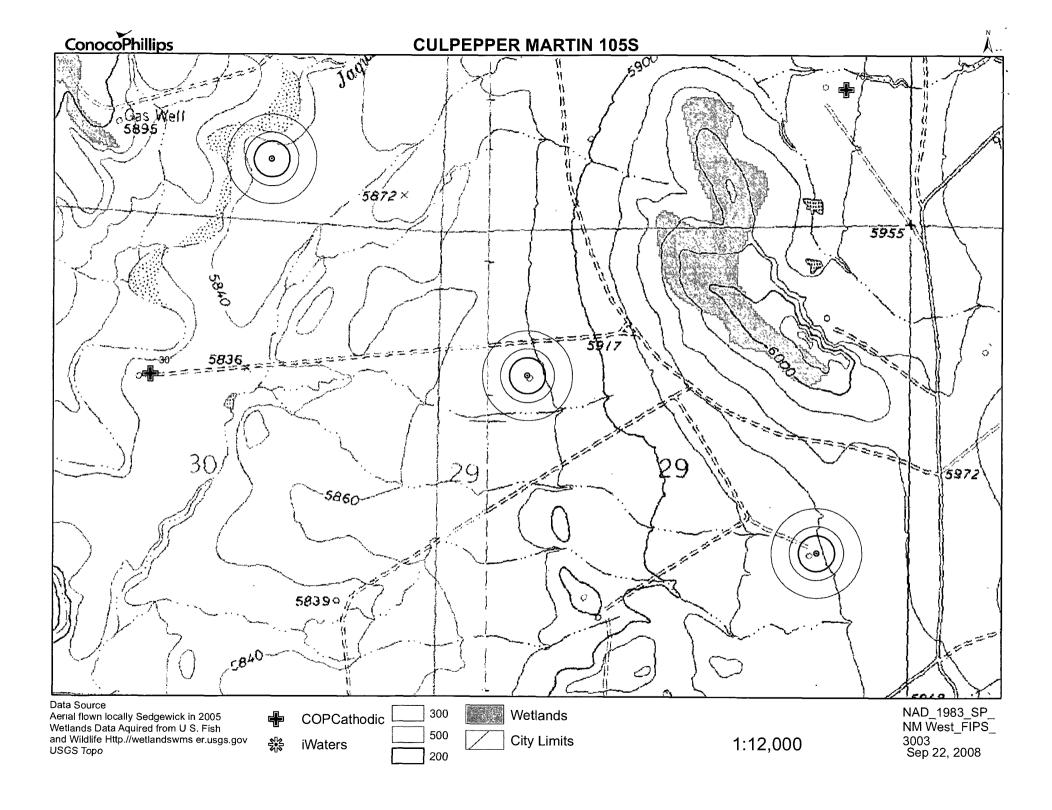

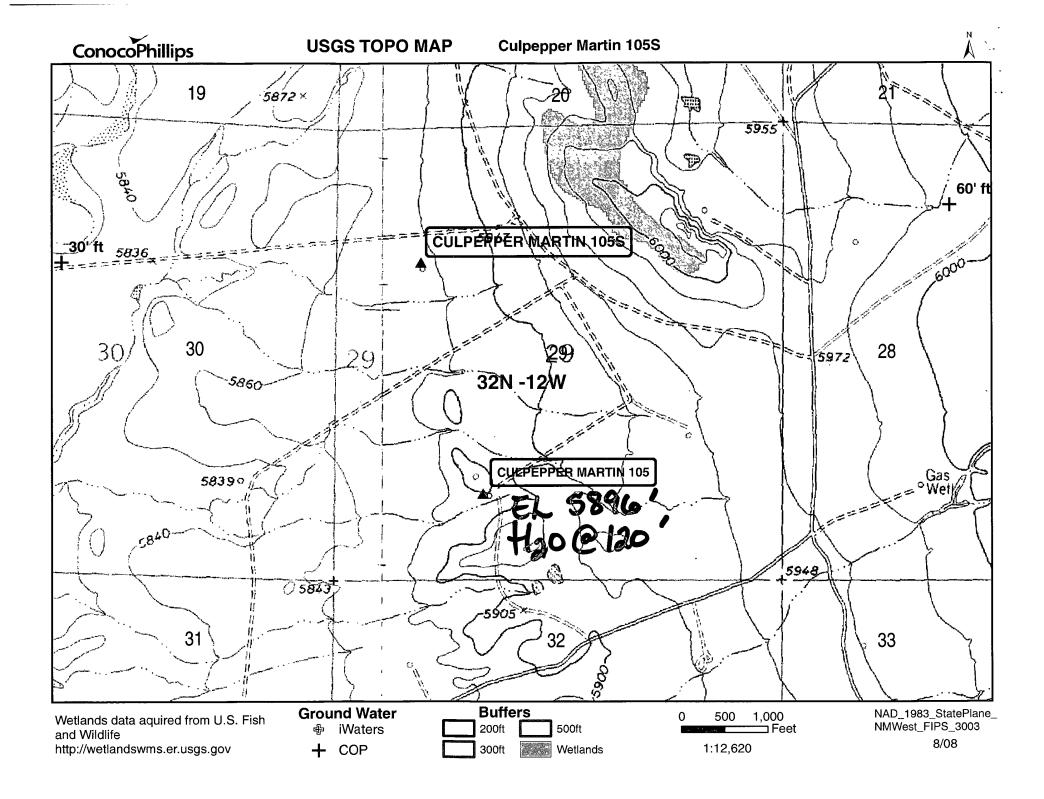

Ground Bed Drilling Log

Well: Culpepper M # 105 Dual Well: cp/m # 13

Diameter: 6 3/4"

Date: 03/18/03 State: N.M.

If So Where:

Ground Bed Depth: 300 ft
Indicate Water Zone Depth: 120

Isolation Plugs Set: NO

Company: Burlington Resource

Perforate Pipe: 300' to 160'

Power Source: Battery

Location: Sec. n29-32n-12w

Coke:

Anodes:

Type: Loresco SWS

Total Weight: 2300 lbs.

Type: Silicon Iron Type D

Weight: 45 lbs.

Coke Depth: 300' to 150'

Volts: 6.8

Amps: 12.2

Resistance: .55

Depth	Drilling Log	r ,	Anodes Log		Remarks
Ft	a 1a	Logged	Coked	Depth	
0'- 60'	Sand Stone				
60'- 120	Sandy				
120' -300'	Shale				
140		2.0			
150	"	2.0			
160	46	2.3			
170	66	2.3			
180	44	2.4	4.0	#10	
190	44	2.2	5.5	#9	-
200'	"	2.3	4.8	#8	
210'	"	2.4	4.6	#7	
220'	"	2.3	5.2	#6	
230'	"	2.6	5.5	#5	
240'	"	2.2	5.5	#4	
250'	44	2.6	5.8	#3	
260'		2.7	5.8	#2	
270'	44	2.7	4.2	#1	
280'	46	1.2			
290'	"	1.0			
300,	66	6.5			

Submit to Appropriate

State of New Mexico Energy, Minerals and Natural Resources Department

Form C-105 Revised 1-1-89

District Office State Lease - 6 copies Fee Lease - 5 copies

Signature

DISTRICT I

P.O. Box 1980, Hobbs, NM 88240 DISTRICT II

OIL CONSERVATION DIVISION P. O. Box 2089

WELL API NO.

30-045-31752


P.O. Drawer DD, Artesia, NM 88210 Santa Fe, New Mexico 87504-2088 5. Indicate Type of Lease STATE FEE X 6. State Oil & Gas Lease No. DISTRICT III 1000 Rio Brazos Rd., Aztec, NM 87410 WELL COMPLETION OR RECOMPLETION REPORT AND LOG MAR 200 7-Lease Name or Unit Agreement Name 1a. TYPE OF WELL GAS WELL X DRY OIL WELL 100 Culpepper Martin b TYPE OF COMPLETION: NEW WORK PLUG DIFF OTHER) BACK RESVR WELL OVER DEEPEN Well No. 2 Name of Operator 8. **BURLINGTON RESOURCES OIL & GAS COMPANY** 105 Pool name or Wildcat 3. Address of Operator PO BOX 4289, Farmington, NM 87499 **Basin Fruitland Coal** 4. Well Location 1745 1005 Feet From The South Feet From The West Unit Letter N: Line and Line Section Township 32N Range 12W NMPM San Juan County, NM 13. Elevations (DF&RKB, RT, GR, etc.) 11. Date T.D. Reached 12. Date Compl. (Ready to Prod.) 14. Elev. Casinghead 10. Date Spudded 2/9/2004 5896' GL, 5904' KB 11/26/2003 12/26/2003 17. If Multiple Compl. How Cable Tools 15. Total Depth 16, Plug Back T.D. 18. Intervals Rotary Tools Many Zones? Drilled By 2420 0-2475' 19. Producing Interval(s), of this completion - Top, Bottom, Name 20. Was Directional Survey Made 2020-2241' Fruitland Coal No 21. Type Electric and Other Logs Run 22. Was Well Cored GR-CCL CASING RECORD (Report all strings set in well) 23. **DEPTH SET** HOLE SIZE CEMENTING RECORD **CASING SIZE** WEIGHT LB/FT. AMOUNT PULLED 20# 140 9 7/8 81 cu. ft. 5:5 50 10.5# 2465 6 1/4 588 cu. ft. 4 1/2 308 LINER RECORD **TUBING RECORD** 24. PACKER SET SIZE TOP **BOTTOM** SACKS CEMENT **SCREEN** DEPTH SET SIZE SN @ 2243' 26. Perforation record (interval, size, and number) ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC 2020-2034', 2109-2112', 2117-2124', 2204-2214', AMOUNT AND KIND MATERIAL USED DEPTH INTERVAL 2226-2241 2020-2241 585 bbls 25# Inr gel, 135,000# 20/40 Brady sand, 1,109,600 SCF N2 PRODUCTION Production Method (Flowing, gas lift, pumping - Size and type pump) **Date First Production** Well Status (Prod. or Shut-in) Flowing 2/9/2004 SI Hours Tested Date of Test Choke Size Prod'n for Oil - Bbl. Gas - MCF Water - Bbl Gas - Oil Ratio Test Period 2/9/2004 Oil - Bbl Oil Gravity - API - (Corr.) Calculated 24 Water - Bbl Flow Tubing Press. Casing Pressure Gas - MCF Hour Rate 108 29. Disposition of Gas (Sold, used for fuel, vented, etc.) Test Witnessed By To be sold 30. List Attachments None 31. I hereby certify that the information shown on both sides of this form is true and complete to the best of my knowledge and belief Printed

Name Tammy Wimsatt


Title


Regulatory Specialist

Date 3/16/2004

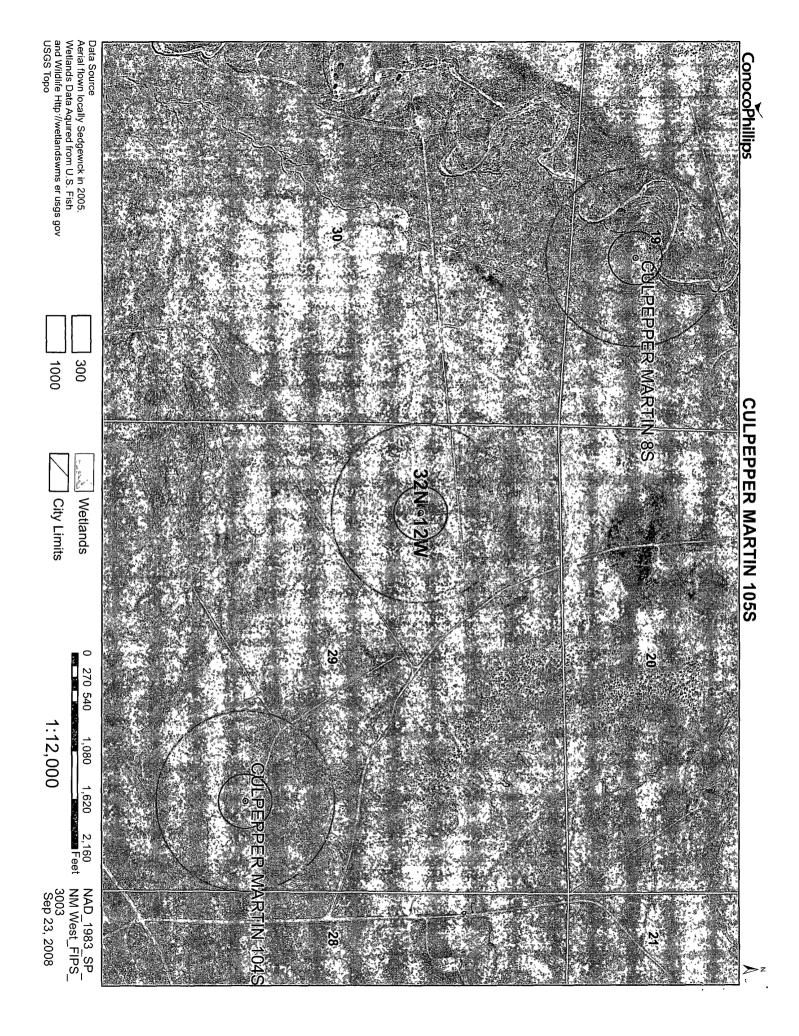


Culpepper Martin 105S Mines, Mills and Quarries Web Map

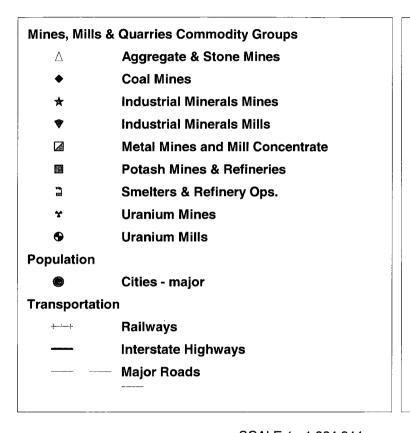

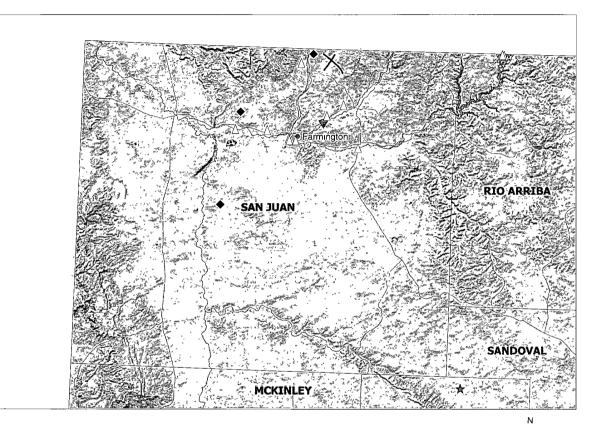





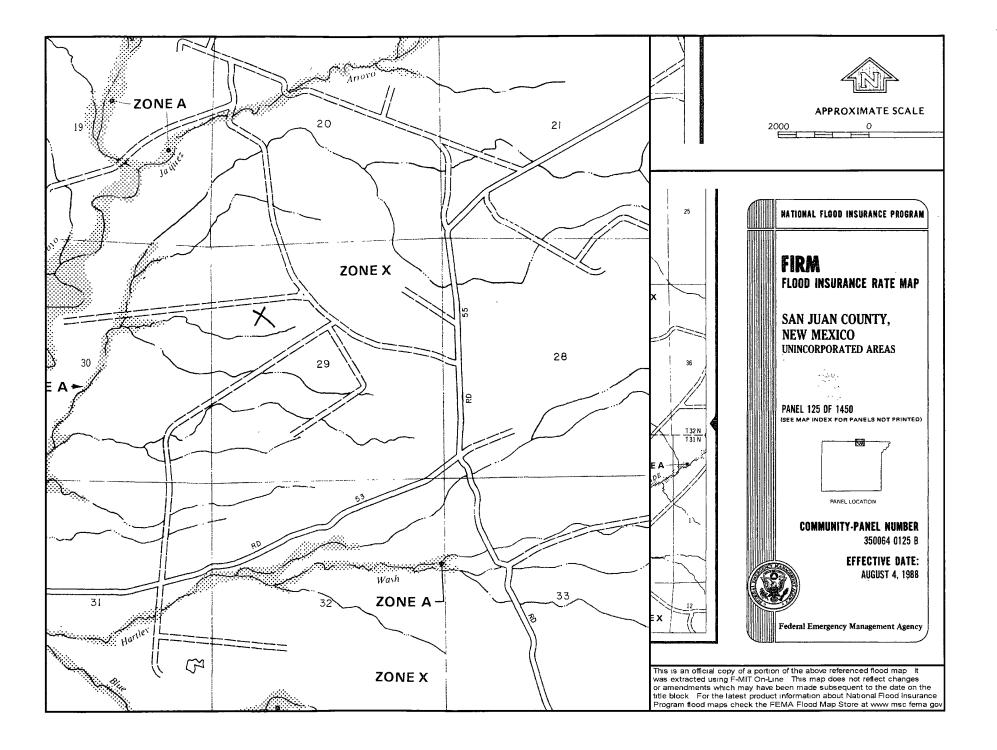

Hydrogeological Report for Culpepper Martin 105S

Regional Geological context:

The Nacimiento Formation is of Paleocene age (Baltz, 1967, p. 35). It crops out in a broad band inside the southern and western margins of the central basin and in a narrow band along the west face of the Nacimiento Uplift. The Nacimiento is a nonresistant unit and typically erodes to low, rounded hills or forms badland topography.

The Nacimiento Formation occurs in approximately only the southern two-thirds of the San Juan Basin where it commformably overlies and intertongues with the Ojo Alamo Sandstone (Fassett, 1974, p. 229). The Nacimiento Formation grades laterally into the main part of the Animas Formation (Fassett and Hinds, 1971, p. 34); thus, in this area, the two formations occupy the same stratigraphic interval.

Strata of the Nacimiento Formation were deposited in lakebeds in the central basin area with lesser deposition in stream channels (Brimhall, 1973, p. 201). In general, the Nacimiento consists of drab, interbedded black and gray shale with discontinuous, white, medium- to very coarse grained arkosic sandstone (Stone e al., 1983, p.30). Stone et al. indicated that the formation may contain more sandstone than commonly reported because some investigators assume the slope-forming strata in the unit area shales, whereas in many places the strata actually are poorly consolidated sandstones. Total thickness of the Nacimiento Formation ranges from about 500 to 1,300 feet. The unit generally thickens from the basin margins toward the basin center (Steven et al., 1974). The sandstone deposits within the Nacimiento Formation are much thinner than the total thickness of the formation because their environment of deposition was localized stream channels (Brimhall, 1973, p. 201). The thickness of the combined San Jose, Animas, and Nacimiento Formations ranges from 500 to more than 3.500 feet.

Hydraulic Properties:

Reported well yields for 53 wells completed in either the Animas or Nacimiento Formations range from 2 to 90 gallons per minute and the median yield is 7.5 gallons per minute. The primary use of water from Nacimiento and Animas Formations is domestic and livestock supplies. There are no known aquifer tests for the Animas or Nacimiento Formations, but specific capacities reported for six wells range from 0.24 to 2.30 gallons per minute per foot of drawdown (Levings et al., 1990).

The Animas and Nacimiento Formations are in many ways hydrologically similar to the San Jose Formation because sands in both units produce approximately the same quantities of water. However, the greater percentage of fine materials in the Animas and Nacimiento Formations may restrict downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented fine material is highly erodible, forms a badland terrain, and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

References

Baltz, E.H., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous rocks, east-central San Juan Basin, New Mexico: USGS Professional Paper

552, 101 p.

Brimhall, R.M., 1973, Ground-water hydrology of Tertiary rocks of the San Juan Basin, New Mexico, in Fassett, J.E., ed., Cretaceous and Tertiary rocks of the Southern Colorado Plateau: Four Corners Geological Society Memoir, p. 197-207.

Fassett, J.E., 1974, Cretaceous and Tertiary rocks of the eastern San Juan Basin, New Mexico and Colorado, in Guidebook of Ghost Ranch, central-northern New Mexico: New Mexico Geological Society, 25th Field Conference, p. 225-230.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: USGS Professional Paper 676, 76 p.

Levings, G.W., Craigg, S.d., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan structural basin, New Mexico, Colorado, Arizona, and Utah: USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Culpepper Martin 105S is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 100' as determined by the topographic map and the Cathodic well data from the Culpepper Martin 105 with an elevation of 5896' and groundwater depth of 120'. The subject well has an elevation of 5881' which is slightly less than the Culpepper Martin 105, therefore the groundwater depth is greater than 100'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The Cathodic data provided the indication of groundwater depth is greater than 100'. The hydro geologic analysis indicates the groundwater depth and the Nacimiento formation will create a stable area for this new location.



Mary Kay Cornwall
Staff Associate
Property Tax, Real Estate, ROW & Claims

ConocoPhillips Company 3401 E. 30th Street P.O. Box 4289 Farmington, NM 87499-1429 (505) 324-6106 (505) 324-6136

October 1, 2008

VIA CERTIFIED MAIL – RETURN RECEIPT REQUESTED 7110-6605-9590-0026-2452

Montoya Sheep & Cattle Company Attn: Stella Montoya 1592 Highway 170 La Plata, NM 87418

Re: Culpepper Martin 8S

SWSE Section 19, T32N, R12W San Juan County, New Mexico

Culpepper Martin 105S SWNW Section 29, T32N, R12W San Juan County, New Mexico

Dear Landowner:

Pursuant to Paragraph 1 (b) of Subsection F of 19.15.17.13 NMAC, an operator shall provide the surface owner notification of the operator's proposal to close a temporary pit on-site in compliance with the on-site closure methods specified in the same Subsection of the NMAC. In compliance of this requirement, please consider this notification of ConocoPhillips' intent to close the temporary pit on the above referenced location.

If you have any questions, please contact Joni Clark @ (505)326-9701.

Sincerely,

Mary Kay Cornwall

Mary Kay Cornwall Staff Associate, PTRRC DISTRICT I 1825 N. French Dr., Hobbs, N.M. 88240

State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised October 12, 2005

DISTRICT II 1301 W. Grand Avenue, Artesia, N.M. 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, NM 87505

Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies


AMENDED REPORT

DISTRICT IV

WELL LOCATION AND ACREAGE DEDICATION PLAT Pool Name 1 API Number ² Pool Code BASIN FRUITLAND COAL Well Number *Property Code Property Name CULPEPPER MARTIN 105 S A7 OGRID No. Operator Name Elevation

BURLINGTON RESOURCES OIL AND GAS COMPANY LP 5881 10 Surface Location UL or lot no. Lot Idn Feet from the North/South line Feet from the East/West line Section Township Range County NORTH 985 WEST SAN JUAN Ε 29 32N 12W 1630' 11 Bottom Hole Location If Different From Surface North/South line UL or lot no. Section Township Lot Idn Feet from the Feet from the East/West line Range County 12 Dedicated Acres 18 Joint or Infill 14 Consolidation Code 16 Order No. 320 Acres - (W/2)

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

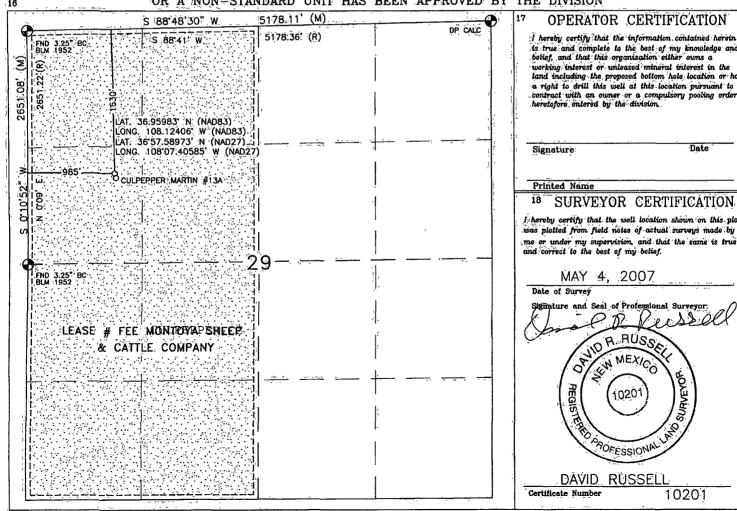

OPERATOR CERTIFICATION

As true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hale location or has a right to drill this well at this location pursuant to a contract with an owner or a compulsory pooling order heretofore intered by the division.

Date

18 SURVEYOR CERTIFICATION

Ishereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

MAY 4, 2007

NO R. RUSSEL W MEXICO POFESSIONAL

DAVID RUSSELI

10201

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	5 00
Chlorides	EPA 300.1	(1000)500

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.