State of New Mexico Energy Minerals and Natural Resources

Form C-144 July 21, 2008

1301 W Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV 1220 S. St. F

Department Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office.

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

1220 S. St. Francis Dr., Santa Fe, NM 8/503	
- 1 U \) ~	Pit, Closed-Loop System, Below-Grade Tank, or sed Alternative Method Permit or Closure Plan Application
Type of action:	X Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
	Modification to an existing permit
	Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
Instructions: Please submit one ap	plication (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request
	this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the
environment. Nor does approval reliev	te the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.
1 Operator: Burlington Resources Oil	& Gas Company, LP OGRID#: 14538
Address: PO Box 4289, Farmington	ı, NM 87499
Facility or well name: Lewis Park 1	
API Number:30	-045-29855 OCD Permit Number:
U/L or Qtr/Qtr: P(SESE) Section	n: 13 Township: 31N Range: 8W County: San Juan
Center of Proposed Design: Latitude:	36.892830' N Longitude: 107.621620' W NAD: X 1927 1983
Surface Owner: X Federal	State Private Tribal Trust or Indian Allotment
X Lined Unlined Lin X String-Reinforced Liner Seams: X Welded X Fac	over avitation P&A aer type: Thickness 20 mil X LLDPE HDPE PVC Other ctory Other Volume: 7000 bbl Dimensions L 120' x W 55' x D 12'
3 Closed-loop System: Subsection Type of Operation: P&A	on H of 19.15.17.11 NMAC Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
Lined Unlined Liner	ad Steel Tanks
4 Below-grade tank: Subsection I Volume: bt	of 19.15.17.11 NMAC of Type of fluid: ection
Tank Construction material:	Type of fluid: OIL CONS. DIV. DIST.
Secondary containment with leak det	ection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
Visible sidewalls and liner	Visible sidewalls only Other
Liner Type: Thickness	mil HDPE PVC Other
Alternative Method:	
Submittal of an exception request is requ	uired. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

7	Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks) Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, instituted in four foot height, four strands of barbed wire evenly spaced between one and four feet X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top. Netting: Subsection E of 19.15.17.11 NMAC (Applies to permanent pits and permanent open top tanks) Screen Netting Other	tion or church)
	Monthly inspections (If netting or screening is not physically feasible)		
8	Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers X Signed in compliance with 19.15.3.103 NMAC		
9	Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance. Please check a box if one or more of the following is requested, if not leave blank: Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval.	eration of appr	oval.
	Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.	.747.	
10	Siting Criteria (regarding permitting) 19.15.17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.		
	Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	Yes	X No
	Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo
	Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	XNo
•	(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	∐NA	
	- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applied to permanent pits)	Yes X NA	No
	- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	_	
	Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	XNo
: ;	- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.	etre. Pres	
	Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality. Written approval obtained from the municipality	Yes	XNo
	Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	XNo
	Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	XNo
	Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes	XNo
÷	Within a 100-year floodplain - FEMA map	Yes	XNo

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checkl							
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in t	· ·						
Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC							
X Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragra							
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.							
X Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC							
X Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NM.	AC						
X Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate	requirements of Subsection C of						
19.15.17.9 NMAC and 19.15.17.13 NMAC							
Previously Approved Design (attach copy of design) API	or Permit						
12							
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC							
Instructions. Each of the following items must be attached to the application. Please indicate, by a check mark in the Coolegie and Hydrogoplasia Poto (only for an either election), based when the provincements of Poto.							
Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Pa	• • • • •						
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropria	ite requirements of 19.15.17.10 NMAC						
Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC	}						
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NM.	AC						
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate	requirements of Subsection C of 19.15.17.9						
NMAC and 19.15.17.13 NMAC							
Previously Approved Design (attach copy of design) API	-						
Previously Approved Operating and Maintenance Plan API	<u> </u>						
13							
Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC	·						
Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark is	n the box, that the documents are attached.						
Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.	17.9 NMAC						
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.	17.10 NMAC						
Climatological Factors Assessment							
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 N	MAC ,						
Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.	15.17.11 NMAC						
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC							
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of	of 19.15.17.14 NMAC *** Control ***						
Quality Control/Quality Assurance Construction and Installation Plan							
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NM.	17 . O						
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15	.17.11 NMAC						
Nuisance or Hazardous Odors, including H2S, Prevention Plan	· · · · · · · · · · · · · · · · · · ·						
Emergency Response Plan							
Oil Field Waste Stream Characterization	"						
Monitoring and Inspection Plan	· , ·						
Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC a	and 19 15 17 13 NMAC						
	md 19.13.17.13 TWATE						
14 Proposed Closure: 19.15.17.13 NMAC	•••						
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan	** ** ** ** ** ** ** ** ** ** ** ** **						
Type: Drilling X Workover Emergency Cavitation P&A Permanent Pit Belo							
Alternative							
Proposed Closure Method: Waste Excavation and Removal							
Waste Removal (Closed-loop systems only)							
X On-site Closure Method (only for temporary pits and closed-loop systems)	- • • •						
XIn-place Burial On-site Trench							
Alternative Closure Method (Exceptions must be submitted to the Santa Fe	Environmental Bureau for consideration)						
Waste Excavation and Removal Closure Plan Checklist (19.15.17.13 NMAC) Instructions: Each of the	following items must be attached to the closure plan						
Please indicate, by a check mark in the box, that the documents are attached.	John The State of Minerica to the Coomic plant						
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC							
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subse	ction F of 19.15.17.13 NMAC						
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)							
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Sub	* ** ** **********						
	osection H of 19.15.17.13 NMAC						
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 N	' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '						

Form C-144 Oil Conservation Division

Page 3 of 5

16 •				
Waste Removal Closure For Closed-loop Systems That Utilize Above G Instructions: Please identify the facility or facilities for the disposal of liquid	Ground Steel Tanks or Haul-off Bins Only: (19.15.17.1	3.D NMAC)		
facilities are required.	as, arming finas and arm canness. Ose anaciment y	*	A	
Disposal Facility Name:	Disposal Facility Permit #:	· · · · · · · · · · · · · · · · · · ·	1997	115 115
Disposal Facility Name:	Disposal Facility Permit #:			
Will any of the proposed closed-loop system operations and associa Yes (If yes, please provide the information No	ated activities occur on or in areas that will nbe us	ed for future se	rvice and	
Required for impacted areas which will not be used for future service and o Soil Backfill and Cover Design Specification - based upon the Re-vegetation Plan - based upon the appropriate requirements Site Reclamation Plan - based upon the appropriate requirements	of Subsection I of 19 15 17 13 NMAC	9.15.17.13 NM	AC	
17 Siting Criteria (Regarding on-site closure methods only: 19.15.17 Instructions Each siting criteria requires a demonstration of compliance in the closucertain siting criteria may require administrative approval from the appropriate distroffice for consideration of approval. Justifications and/or demonstrations of equivalent	re plan Recommendations of acceptable source material are rict office or may be considered an exception which must be su	bmitted to the Sant		
Ground water is less than 50 feet below the bottom of the buried wa	aste.		Yes	X No
- NM Office of the State Engineer - iWATERS database search; USG	S Data obtained from nearby wells		N/A	
Ground water is between 50 and 100 feet below the bottom of the b	ouried waste		Yes	X No
- NM Office of the State Engineer - iWATERS database search; USGS	s; Data obtained from nearby wells		□N/A	
Ground water is more than 100 feet below the bottom of the buried	waste.		X Yes	No
- NM Office of the State Engineer - iWATERS database search; USGS	S, Data obtained from nearby wells		□N/A	
Within 300 feet of a continuously flowing watercourse, or 200 feet of any of (measured from the ordinary high-water mark).	other significant watercourse or lakebed, sinkhole, or pla	aya lake	Yes	XNo
- Topographic map; Visual inspection (certification) of the proposed si	te			
Within 300 feet from a permanent residence, school, hospital, institution, or - Visual inspection (certification) of the proposed site; Aerial photo; sat			Yes	X No
Within 500 horizontal feet of a private, domestic fresh water well or spring t purposes, or within 1000 horizontal fee of any other fresh water well or spri - NM Office of the State Engineer - iWATERS database; Visual inspec	ing, in existence at the time of the initial application.	watering	Yes	X No
Within incorporated municipal boundaries or within a defined municipal fres pursuant to NMSA 1978, Section 3-27-3, as amended.		adopted	Yes	XNo
 Written confirmation or verification from the municipality; Written approximation of a wetland 	pproval obtained from the municipality	-	Yes	X No
- US Fish and Wildlife Wetland Identification map; Topographic map;	Visual inspection (certification) of the proposed site		□	110
Within the area overlying a subsurface mine.			Yes	X No
- Written confiramtion or verification or map from the NM EMNRD-M	lining and Mineral Division			[[]].
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Ge Topographic map	eology & Mineral Resources; USGS; NM Geological So	ociety;	Yes	X No
Within a 100-year floodplain FEMA map			Yes	XNo
18 On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instruction	ons: Each of the following items must bee attach	hed to the closu	re plan. Ple	ase indicate,
by a check mark in the box, that the documents are attached. X Siting Criteria Compliance Demonstrations - based upon the	e appropriate requirements of 19 15 17 10 NMAC	<u>}</u>		
X Proof of Surface Owner Notice - based upon the appropriate		-	٠٠٠ کي	* * * * * * * * * * * * * * * * * * * *
Construction/Design Plan of Burial Trench (if applicable) by				,
Construction/Design Plan of Temporary Pit (for in place but	• • • •		f 19.15.17.1	NMAC
X Protocols and Procedures - based upon the appropriate requi		=,	and the second	
Confirmation Sampling Plan (if applicable) - based upon the		15.17.13 NMA	Ch. Print	\$ * *
X Waste Material Sampling Plan - based upon the appropriate				
X Disposal Facility Name and Permit Number (for liquids, dri	lling fluids and drill cuttings or in case on-site clo	sure standards	cannot be ac	hieved)
X Soil Cover Design - based upon the appropriate requirement			, .	
X Re-vegetation Plan - based upon the appropriate requirement	nts of Subsection I of 19.15.17.13 NMAC			

19 •		· ·	•	
Operator Application Certification:			مو ا	
I hereby certify that the information submitted with this application is to			Strate services	• •
Name (Print): Rhonda Rogers	Title:	Regulatory Technician	 ,	
Signature: 2 Nonda Soger	Date:	12/8/2008		
e-mail address: rogerrs@conocophillups.com	Telephone:	505-599-4018		
20				
OCD Approval: Permit Application (including closure pl	an) Closure Plan (only)	OCD Conditions (see attack	chment)	
OCD Representative Signature:	641.	Approval Date:	12-11-08	
Title: Ewiro / spcc	OCD Permi	t Number:		
21				
Closure Report (required within 60 days of closure completi	ion): Cubacutan V ac 10 1c 17 17 NRAC			ļ
Instructions: Operators are required to obtain an approved closure pla			re report. The closure	
report is required to be submitted to the division within 60 days of the c		Please do not complete this section	of the form until an	
approved closure plan has been obtained and the closure activities hav	e been completed.			
	Closure	Completion Date:		
22	,			
Closure Method:				
Waste Excavation and Removal On-site Closure M	Method Alternative Closure M	1ethod Waste Removal (Cl	osed-loop systems only)	İ
If different from approved plan, please explain.		_	•	
				
23 Closure Report Regarding Waste Removal Closure For Closed-loo	n Systoms That Hillian Above Curr	and Steel Toules on Houl off Ding	Owless	
Instructions: Please identify the facility or facilities for where the liqu				, ,
were utilized.		.,	,	
Disposal Facility Name:	Disposal Facility F	Permit Number:		
Disposal Facility Name:	Disposal Facility F		11 11 11 11 11 11 11 11 11 11 11 11 11	
Were the closed-loop system operations and associated activities pe	_	be used for future service and opea	rtions?	.
Yes (If yes, please demonstrate compliane to the items below)	∐No			
Required for impacted areas which will not be used for future servi	ce and operations:		.11	
Site Reclamation (Photo Documentation)		•	. '	
Soil Backfilling and Cover Installation			م مام مه چین مه	
Re-vegetation Application Rates and Seeding Technique				
.24		Ma.	- A - N	
Closure Report Attachment Checklist: Instructions: Each of the box, that the documents are attached.	of the following items must be attach	ned to the closure report. Please in	idicate, by a check mark	in
Proof of Closure Notice (surface owner and division)				
Proof of Deed Notice (required for on-site closure)			2	
Plot Plan (for on-site closures and temporary pits)			A Carpore	
Confirmation Sampling Analytical Results (if applicable	1			
Waste Material Sampling Analytical Results (if applicable				
Disposal Facility Name and Permit Number	ne)		*	
Soil Backfilling and Cover Installation				
Re-vegetation Application Rates and Seeding Technique	.		1	,
Site Reclamation (Photo Documentation)	•			
On-site Closure Location: Latitude:	Longitude:	NAD	1927	: 12. a,v:17,182 07
On-site Ciosure Location. Latitude.	Longitude.	NAU L	1727	
		.,	The state of the	. ,
Operator Clasura Cartification:				
Operator Closure Certification: I hereby certify that the information and attachments submitted with thi	is alosura ranort is tura magnesta and	d complete to the heat of my brand	adae and helief I also	ortify that
the closure complies with all applicable closure requirements and cond			the separation of the	ingy mai
		•	, x, 15,	
Name (Print):	Title:			
Signature:	Date:			
				•
e-mail address:	Telephone:		3 - 51-136	.,

DATA SHEET FOR DEEP BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO

(SUBMIT 2 COPIES TO OCD AZTEC OFFICE)

15-30-045-10457 220-30-045-28223

PPCO DESIGNATION: FM-461

OPERATOR: PHILLIPS PETROLEUM COMPANY FARMINGTON, N.M. 87401

LOCATION: M 24 31 8 LEASE NUMBER: 650117

(505) 599-3400

NAME OF WELL/S OR PIPELINE SERVED: (1) SJ 32-8 UNIT #15 MV

(2) 32-8#220

ELEVATION: NA

COMPLETION DATE: 05/04/63

TOTAL DEPTH: 160 FT.

LAND: FEDERAL

CASING INFO.; SIZE: NA IN. TYPE: NA DEPTH: NA FT. CEMENT USED: NA

IF CEMENT OR BENTONITE PLUGS HAVE BEEN PLACED, SHOW DEPTHS & AMOUNTS:

PLUG DEPTH: NONE PLUG AMOUNT: NONE

WATER INFORMATION:

WATER DEPTH (FT): (1) 389 (2) -0-

WATER INFORMATION: NA

DEPTHS GAS ENCOUNTERED (FT): NA

TYPE AND AMOUNT OF COKE BREEZE USED:

COKE TYPE: METALLURGICAL COKE BREEZE

COKE AMOUNT: 2191 LBS.

DEPTHS ANODES PLACED (FT):

80,100,120,135,145,195,205,380,430,440

DEPTH VENT PIPE PLACED (FT): 160

VENT PIPE PERFORATIONS (FT): TOP 70 BOTTOM 160

REMARKS: -0-

IF ANY OF THE ABOVE DATA IS UNAVAILABLE, PLEASE INDICATE SO. COPIES OF ALL LOGS, INCLUDING DRILLERS LOG, WATER ANALYSIS & WELL BORE SCHEMATICS SHOULD BE SUBMITTED WHEN AVAILABLE. UNPLUGGED ABANDONED WELLS ARE TO BE INCLUDED.

* - LAND TYPE MAY BE SHOWN: F-FEDERAL; I-INDIAN; S-STATE; P-FEE IF FEDERAL OR INDIAN, ADD LEASE NUMBER.

NA-INFORMATION NOT AVAILABLE

FEB21 1992 OIL CON. DIV. DIST. 3

CC: CP FILE -- FARMINGTON HOUSTON

REPRODUCTION OF "OCD" FORM

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-128

Well Location and/or Gas Proration Plat

	~2"	 				1
. ,	**	 	4.		,	

SAN JUAN ame of Producing	Formation_	_County, New	Mexico. G. L	Feet From the West Line. Elevation 6452-4 UNGRADED Dedicated Acreage 320 daries of Section)
ame of Producing		tess Verds ances must be	Pool 31.	Dedicated Acreage 320
		ances must be		
	ote: All dista	88079951 Pederul	from outer boun	daries of Section)
		Pederal	,	
			`	
			`	
		 \		
		 X	1	· .
	\/		-	Sally De la
	v	/\		
*	\mathcal{N}			
	/ \	/ \		
	/ \		24	the same of the state of the same
		7		La Transport Lange Car
	Facilie	Morchwest 21pe	-	A. A. T. C.
	line Ce	1 \	•	(Japa-1-191966 m)
<u>L</u> .	790'-0		· ∔	OIL COLL COM.
	7.30-0	30994		EISTE
	8			
/	\$11-	}		
		į	V	
•	CALE: 1"=1000'	Yes No.	This is to	
. Is this Well a D	oual Comp. ?	YesNo		certify that the above plat was from field notes of actual surv
. If the answer t		*	•	ne or under my supervision an
any other dually dedicated acreas		No .		me are true and correct to the knowledge and belief.
	-		•	
ame Original signosition. Castrict &	agraces	Dugan	Date Surve	eyed 7 FERRUARY 1956

New Mexico Office of the State Engineer POD Reports and Downloads

Range: 08W Sections: 11,12,14,13,23,24 Township: 31N Zone: Search Radius: NAD27 X: Y: X.7 Number: County: Basin: Suffix: ○ Non-Domestic ○ Domestic ○ All Owner Name: (First) (Last) POD / Surface Data Report Avg Depth to Water Report Water Column Report Clear Form iWATERS Menu Help

WATER COLUMN REPORT 12/08/2008

(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Depth Depth Water (POD Number Y Well Water Column Tws Rng Sec q q q Zone X 465 75 08W 24 4 4 3 390 SJ 01167 31N

Record Count: 1

New Mexico Office of the State Engineer POD Reports and Downloads

Range: 08W Township: 31N Sections: 11,12,14,13,23,24 NAD27 X: Y: Zone: Search Radius: Number: County: Basin: Suffix: Owner Name: (First) (Last) ○ Non-Domestic ○ Domestic ● All POD / Surface Data Report Avg Depth to Water Report Water Column Report Clear Form iWATERS Menu Help

WATER COLUMN REPORT 12/08/2008

(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Depth Depth Water (POD Number Rng Sec qqq Zone Well Water Column SJ 01167 08W 24 4 4 3 465 390 75 31N

Record Count: 1

Depth

15

Well

Y

Depth

10

Water

Water (

5

Column

New Mexico Office of the State Engineer POD Reports and Downloads

Township: 30N Range: 08W Sections: 7,18,19 NAD27 X: Y: Zone: Search Radius: County: Basin: Number: Suffix: ○ Non-Domestic ○ Domestic ● All Owner Name: (First) (Last) POD / Surface Data Report Avg Depth to Water Report Water Column Report Clear Form iWATERS Menu Help WATER COLUMN REPORT 12/08/2008

Zone

Х

(quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest)

Rng Sec qqq


08W 19


30N

Record Count: 1

POD Number


SJ 01516

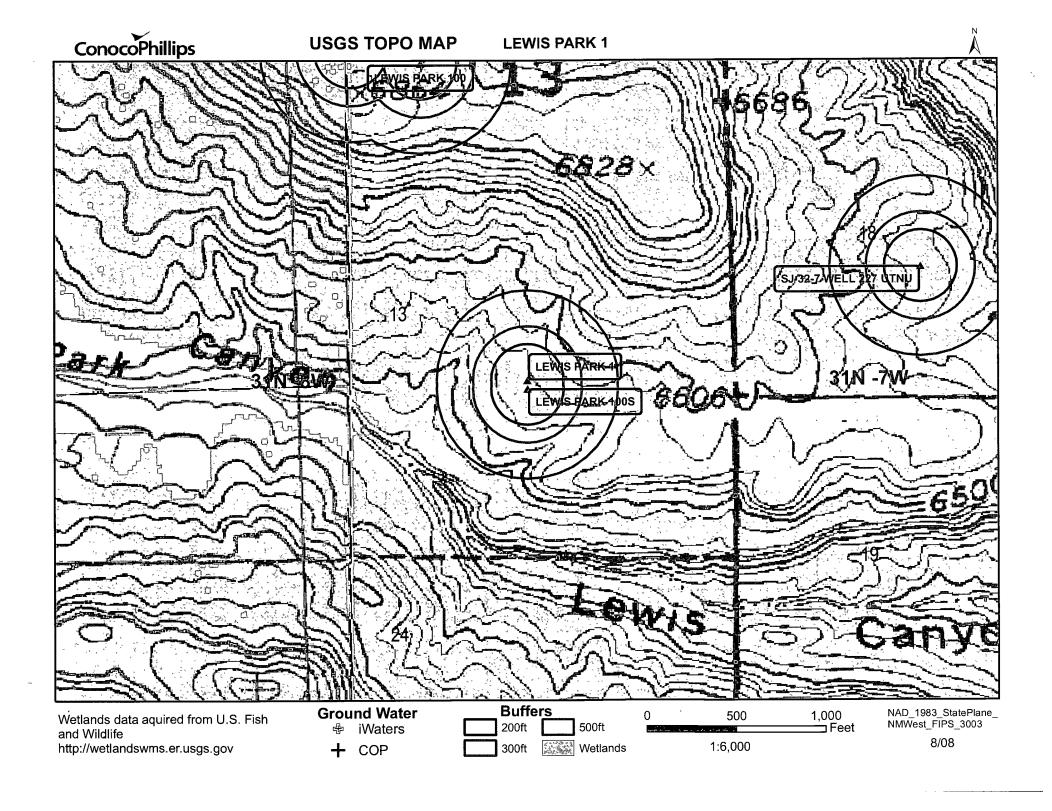


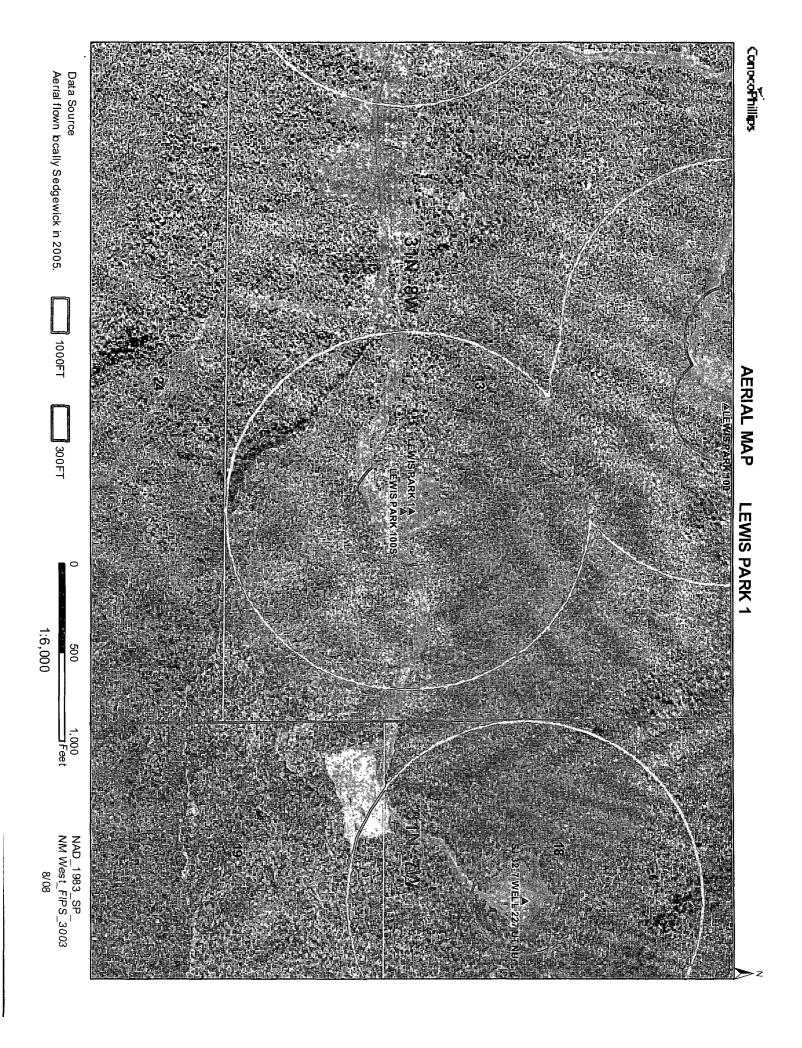

Lewis Park 1 Mines, Mills and quarries Web Map

Mines, Mill	s & Quarries Commodity Groups
Δ	Aggregate & Stone Mines
•	Coal Mines
*	Industrial Minerals Mines
•	Industrial Minerals Mills
	Metal Mines and Mill Concentrate
	Potash Mines & Refineries
	Smelters & Refinery Ops.
*	Uranium Mines
•	Uranium Mills

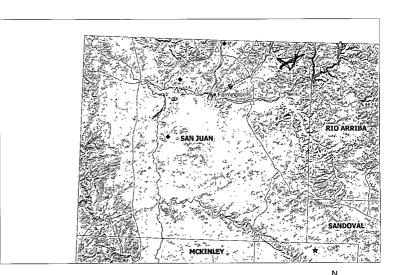






FEMA MSC Viewer



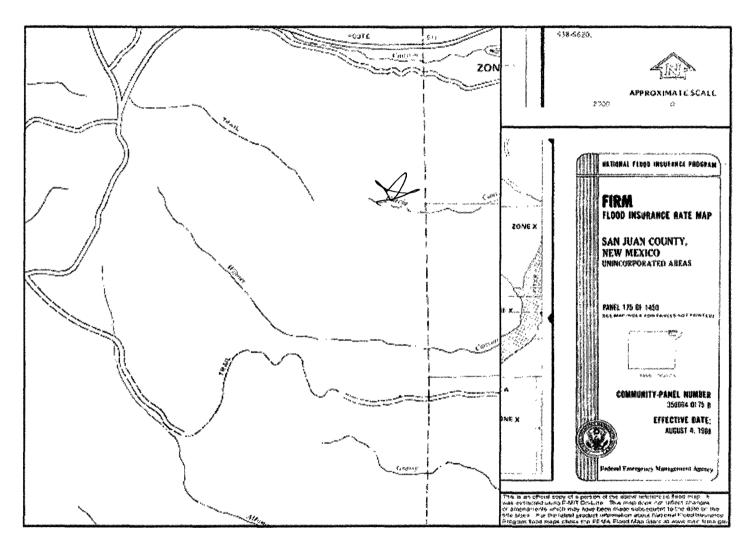

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Lewis Park 1 is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300° of any continuously flowing watercourse or 200° from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The groundwater depth is considered to be greater than 100° as determined by the topographic map and the Cathodic well data from the San Juan 32-8 15 with an elevation of 6452° and groundwater depth of 389°. The subject well has an elevation of 6536° which is greater than the San Juan 32-8 15, therefore the groundwater depth is greater than 100°. There are iWATERS data points located in the area as indicated on the TOPO Map. The Cathodic data provided the indication of groundwater depth and the Nacimiento formation will create a stable area for this new location.

Hydrogeological Report for Nacimiento Formation

Regional Geological context:

The Nacimiento Formation is of Paleocene age (Baltz, 1967, p. 35). It crops out in a broad band inside the southern and western margins of the central basin and in a narrow band along the west face of the Nacimiento Uplift. The Nacimiento is a nonresistant unit and typically erodes to low, rounded hills or forms badland topography.

The Nacimiento Formation occurs in approximately only the southern two-thirds of the San Juan Basin where it commformably overlies and intertongues with the Ojo Alamo Sandstone (Fassett, 1974, p. 229). The Nacimiento Formation grades laterally into the main part of the Animas Formation (Fassett and Hinds, 1971, p. 34); thus, in this area, the two formations occupy the same stratigraphic interval.

Strata of the Nacimiento Formation were deposited in lakebeds in the central basin area with lesser deposition in stream channels (Brimhall, 1973, p. 201). In general, the Nacimiento consists of drab, interbedded black and gray shale with discontinuous, white, medium- to very coarse grained arkosic sandstone (Stone e al., 1983, p.30). Stone et al. indicated that the formation may contain more sandstone than commonly reported because some investigators assume the slope-forming strata in the unit area shales, whereas in many places the strata actually are poorly consolidated sandstones. Total thickness of the Nacimiento Formation ranges from about 500 to 1,300 feet. The unit generally thickens from the basin margins toward the basin center (Steven et al., 1974). The sandstone deposits within the Nacimiento Formation are much thinner than the total thickness of the formation because their environment of deposition was localized stream channels (Brimhall, 1973, p. 201). The thickness of the combined San Jose, Animas, and Nacimiento Formations ranges from 500 to more than 3.500 feet.

Hydraulic Properties:

Reported well yields for 53 wells completed in either the Animas or Nacimiento Formations range from 2 to 90 gallons per minute and the median yield is 7.5 gallons per minute. The primary use of water from Nacimiento and Animas Formations is domestic and livestock supplies. There are no known aquifer tests for the Animas or Nacimiento Formations, but specific capacities reported for six wells range from 0.24 to 2.30 gallons per minute per foot of drawdown (Levings et al., 1990).

The Animas and Nacimiento Formations are in many ways hydrologically similar to the San Jose Formation because sands in both units produce approximately the same quantities of water. However, the greater percentage of fine materials in the Animas and Nacimiento Formations may restrict downward vertical leakage to the Ojo Alamo Sandstone or Kirtland Shale. The poorly cemented fine material is highly erodible, forms a badland terrain, and supports only spotty vegetation. These conditions are more conductive to runoff than retention of precipitation.

References:

Baltz, E.H., 1967, Stratigraphy and regional tectonic implications of part of Upper Cretaceous rocks, east-central San Juan Basin, New Mexico: USGS Professional Paper

552, 101 p.

Brimhall, R.M., 1973, Ground-water hydrology of Tertiary rocks of the San Juan Basin, New Mexico, in Fassett, J.E., ed., Cretaceous and Tertiary rocks of the Southern Colorado Plateau: Four Corners Geological Society Memoir, p. 197-207. Fassett, J.E., 1974, Cretaceous and Tertiary rocks of the eastern San Juan Basin, New

Mexico and Colorado, in Guidebook of Ghost Ranch, central-northern New Mexico: New Mexico Geological Society, 25th Field Conference, p. 225-230.

Fassett, J.E., and Hinds, J.S., 1971, Geology and fuel resources of the Fruitland Formation and Kirtland Shale of the San Juan Basin, New Mexico and Colorado: USGS Professional Paper 676, 76 p.

Levings, G.W., Craigg, S.d., Dam, W.L., Kernodle, J.M., and Thorn, C.R., 1990, Hydrogeology of the San Jose, Nacimiento, and Animas Formations in the San Juan structural basin, New Mexico, Colorado, Arizona, and Utah: USGS Hydrologic Investigations Atlas HA-720-A, 2 sheets.

Stone, W.J., Lyford, F.P., Frenzel, P.F., Mizell, N.H., and Padgett, E.T., 1983, Hydrogeology and water resources of San Juan Basin, New Mexico: New Mexico Bureau of Mines and Mineral Resources, Hydrologic Report 6.

Rogers, Rhonda S

From: Rogers, Rhonda S

Sent: Monday, December 08, 2008 11:34 AM

To: 'Mark_kelly@nm.blm.gov'
Subject: Surface Owner Notification

The following location temporary pit will be closed on-site. Please let me know if you have any questions. Thank you Lewis Park 1.

Rhonda Rogers

Regulatory Technician ConocoPhillips - SJBU phone (505) 599-4018 e-mail rogerrs@conocophillips.com District .I PO Box 1980, Hobbs, NM 88241-1980

District II PO Drawer DD, Antesia, NM 88211-0719

District III 1000 Fig Brazos Rd., Aztec, NM 87410

Ostrict IV PO Box 2088, Santa Fe, NM 87504-2088 State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION PO Box 2088
Santa Fe, NM 87504-2088

Form C-102
Revised February 21, 1994
Instructions on back
Appropriate District Office
State Lease – 4 Copies

Sucret to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

AMENDED REPORT

PU BCX 2088,	Santa Fe,	NM 8/304-20	<i>3</i> 00						1 1 1		
		!	WELL	LOCAT	ION AND A	CREAGE DED	ICAT	IC', PL	AT		
1	API Numbe	<u> </u>		*Pool Co	эе			PIII Name	·		
30-045	- 2°	9855	715	599	Ва	sin Dakota					
'Property	Code				*Propert	y Name				* WE	ell Number
7260		_			LEWIS	PARK					1
'CGAID	No.			10701	*Operator			45			levation .
14538			308F 11	NG TO'.	RESOURCES	S OIL & GAS	5 CO	MP://Y	L		6536 ·
,			_		¹⁰ Surface				_		
UL or Let no.	Section	Township	Range	Lot Ior	Feet from the	North/South line	1	t from the	East/West		County
<u>=</u>	13	31N	8W		1050	SOUTH	1	180	EAS	5 l	SAN JUA
				Hole .		f Different					
UL or lot no.	Section	Townshap	Range	Let Ior	Feet from the	North/South line	Fee	t from the	East/West	t line	County
	<u></u>										
12 Oeditated Acres	5	¹³ Joant or Infil	11 2º Conso	lidation Coo	e ¹⁵ Order No.						
E/320					<u></u>						
NCLO	WABLE W	ILL BE AS	SIGNEC	TO -	IS COMPLETI	ON UNTIL ALL	INTE	RESTS H	AVE BEE	EN CO	NSOL IDATED
		OR A	NON-ST	ANDARI	UNIT HAS B	EEN APPROVED	BY T				
16			514	90.0				17 CPER			[FICATIO
				ıl		1	l	true and comp	lets to the D	information lest of my	n contained herein knowledge and beli
		**	-	1		İ	1				
							1				•
		į					. [>	
	~ P/	A EUV	FIN	. '			8(\	′ (Ś	. 1
	出自由	للد للمشتاري		├─╁╴		 	. 4	5:E-atur	UJ	KAA	huel
	Ini _	PR 1 9 1	999	II .			2608	Peggy		fi _o l	4
	nn i	33		,]		ì	~	Printed		TTET	
	OUU	COM	DIA	ဝ						Adm:	inistrat
•	(0) NF	COLOGIA S	ો	1				Title			
N		CON.	•	- 1	NIMANIM	.02045			2-15-	99	
				12		-82815		Date		است سبير	
75				13		ı		16 E JRV	EYOR (CERT	IFICATIO
51				.]				I was " offer the	TYME TIBLE ACT	tes of acti	tion shown on this wal surveys made by We same is true and
		1		1		i I		correct to th	we best of my	belief.	Me same is true and
				1			. 4				
						\	. 14	VOV	EMBER	18.	1998
		1		1		; 	560.	Data of			
				- 			~ i	Signature and	See1 05 779	ED.	WARD
						1180		4	(JE)	NE.	180
		1		Ί		i †		l	WA	ME	6/01/
				ıl ı		l <u>ō</u> l		1	3/3/	6857	191
				1		iR		1//			
l		I .		1		<u> = </u>		/= <i>h</i> 6		10	X 5/_

5241.06

Burlington Resources Oil & Gas Company, LP San Juan Basin Pit Design and Construction Plan

In accordance with Rule 19.15.17 the following information describes the design and construction of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

General Plan:

- BR will design and construct a properly sized and approved temporary pit which will contain liquids and solids and should prevent contamination of fresh water and protect public health and environment.
- 2. Prior to constructing the pit, topsoil will be stockpiled in the construction zone for later use in restoration.
- 3. BR will sign the well location in compliance with 19.15.3.103 NMAC.
- 4. BR shall construct all new fences around the temporary pit utilizing 48" steel mesh field-fence (hogwire) on the bottom with a single strand of barbed wire on top. T-posts shall be installed every 12 feet and corners shall be anchored utilizing a secondary T-post. Temporary pits will be fenced at all times excluding drilling or workover operations, when the front side of the fence will be temporarily removed for operational purposes.
- 5. BR shall construct the temporary pit so that the foundation and interior slopes are firm and free of rocks, debris, sharp edges or irregularities to prevent liner failure.
- 6. BR shall construct the pit so that the slopes are no steeper than two horizontal feet to one vertical foot.
- 7. Pit walls will be walked down by a crawler type tractor following construction.
- 8. All temporary pits will be lined with a 20-mil, string reinforced, LLDPE liner, complying with EPA SW-846 method 9090A requirements.
- Geotextile will be installed beneath the liner when rocks, debris, sharp edges or irregularities cannot be avoided.
- 10. All liners will be anchored in the bottom of a compacted earth-filled trench at least 18 inches deep.
- 11. BR will minimize liner seams and orient them up and down, not across a slope. Factory seams will be used whenever possible. BR will ensure all field seams are welded by qualified personnel. Field seams will be overlapped four to six inches and will be oriented parallel to the line of maximum slope. BR will minimize the number of field seams in corners and irregularly shaped areas.
- 12. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides, or a manifold system.
- 13. The pit shall be protected from run-off by constructing and maintaining diversion ditches around the location or around the perimeter of the pit in some cases.
- 14. The volume of the pit shall not exceed 10 acre-feet, including freeboard.
- 15. Temporary blow pits will be constructed to allow gravity flow to discharge into lined drill pit.
- 16. The lower half of the blow pit (nearest lined pit) will be lined with a 20-mil, string reinforced, LLDPE liner. The upper half of the blow pit will remain unlined as allowed in Rule 19.15.17.11 F.11.
- 17. BR will not allow freestanding liquids to remain on the unlined portion of a temporary blow pit.

Burlington Resources Oil & Gas Company, LP San Juan Basin Maintenance and Operating Plan

In accordance with Rule 19.15.17 the following information describes the operation and maintenance of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

General Plan:

- BR will operate and maintain a temporary pit to contain liquids and solids and maintain the integrity of the liner and liner system to prevent contamination of fresh water and protect public health and environment.
- 2. BR will conserve drilling fluids by transferring liquids to pits ahead of the rigs whenever possible. All other drilling fluids will be disposed at Basin Disposal Inc., permit # NM-01-005.
- 3. BR will not discharge or store any hazardous waste in any temporary pit.
- 4. If any pit liner's integrity is compromised, or if any penetration of the liner occurs above the liquid's surface, then BR shall notify the Aztec Division office by phone or email within 48 hours of the discovery and repair the damage or replace the liner.
- 5. If a leak develops below the liquid's level, BR shall remove all liquids above the damaged liner within 48 hours and repair the damage or replace the liner. BR shall notify the Aztec Division office by phone or email within 48 hours of the discovery for leaks less than 25 barrels. BR shall notify the Aztec Division office as required pursuant to Subsection B of 19.15.3.116 NMAC shall be reported within twenty-four (24) hours of discovery of leaks greater than 25 barrels. In addition, immediate verbal notification pursuant to Subsection B, Paragraph (1), and Subparagraph (d) of 19.15.3.116 NMAC shall be reported to the division's Environmental Bureau Chief.
- 6. The liner shall be protected from any fluid force or mechanical damage through the use of mud pit slides, or a manifold system.
- 7. The pit shall be protected from run-off by constructing and maintaining diversion ditches around the location or around the perimeter of the pit in some cases.
- 8. BR shall immediately remove any visible layer of oil from the surface of the temporary pit after cessation of a drilling or workover operation. Oil absorbent booms will be utilized to contain and remove oil from the pit's surface. An oil absorbent boom will stored on-site until closure of pit.
- 9. Only fluids generated during the drilling or workover process may be discharged into a temporary pit.
- 10. BR will maintain the temporary pit free of miscellaneous solid waste or debris.
- 11. During drilling operations, BR will inspect the temporary pit at least once daily to ensure compliance with this plan. Inspections will be logged in the IADC reports. BR will file this log with the Aztec Division office upon closure of the pit.
- 12. After drilling operations, BR will inspect the temporary pit weekly so long as liquids remain in the temporary pit. A log of the inspections will be stored at BR's office electronically and will be filed with the Aztec Division office upon closure of the pit.
- 13. BR shall maintain at least two feet of freeboard for a temporary pit.
- 14. BR shall remove all free liquids from a temporary pit within 30 days from the date the operator releases the drilling rig.
- 15. BR shall remove all free liquids from a cavitation pit within 48 hours after completing cavitation. BR may request additional time to remove liquids from the Aztec Division office if it is not feasible to remove liquids within 48 hours.

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)			
Benzene	EPA SW-846 8021B or 8260B	0.2			
BTEX	BTEX EPA SW-846 8021B or 8260B				
TPH	EPA SW-846 418.1	2500			
GRO/DRO	EPA SW-846 8015M	500			
Chlorides	EPA 300.1	(1000)/500			
	1	1 12 12			

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre:
Present Pure Live Seed (PLS) = Purity X Germination/100
Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)
Purity
Source No. The basis of PLS as follows:
Source No. One (poor quality)
Source No. two (better quality)
Purity
Source No. two (better quality)
Purity
80 percent
Germination
Percent PLS
20 percent
Percent PLS
50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.