District I 1,625 N. French Dr , Hobbs, NM 88240 District II 1301 W Grand Ave , Artesia, NM 88210

District III

State of New Mexico Energy Minerals and Natural Resources

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade

Form C-144

Department Oil Conservation Division 1220 South St. Francis Dr.

tanks, submit to the appropriate NMOCD District Office

District	<u>IV</u>					
1220 S	St	Francis Dr	, Santa	Fe,	NM	87505
$\overline{\sim}$	$\overline{}$	~ _				

District IV  1220 S St Francis Dr., Santa Fe, NM 87505	Santa Fe, NM 87505	For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office
	Closed-Loop System, Below-	-Grade Tank, or
101	Alternative Method Permit or	
		grade tank, or proposed alternative method
		-grade tank, or proposed alternative method
=	odification to an existing permit	5.445 tams, or proposed attendance memora
XC	-	permitted or non-permitted pit, closed-loop system, nethod
Instructions: Please submit one applicat	ion (Form C-144) per individual pit, clos	sed-loop system, below-grade tank or alternative request
		erations result in pollution of surface water, ground water or the applicable governmental authority's rules, regulations or ordinances
Operator: Burlington Resources Oil & Ga	s Company, LP	OGRID#: 14538
Address: PO Box 4289, Farmington, NM	87499	
Facility or well name: Johnston Federal 1	5S	
API Number: 30-045-3	32129 OCD Permit	t Number:
U/L or Qtr/Qtr: L(NWSW) Section:	35 Township: 31N Range:	e: 9W County: San Juan
Center of Proposed Design: Latitude:	36'51.1090' N Longitude	e: <b>107'45.3376' W</b> NAD: <b>X</b> 1927 1983
Surface Owner: X Federal	State Private Tribal Trust of	or Indian Allotment
Permanent Emergency Cavitation  X Lined Unlined Liner type  X String-Reinforced  Liner Seams. X Welded X Factory		PE HDPE PVC Other  4400 bbl Dimensions L 65' x W 45' x D 10'
	f 19.15.17.11 NMAC  ng a new well	pplies to activities which require prior approval of a permit or
Drying Pad Above Ground Steel	Tanks Haul-off Bins Other	1567
Lined Unlined Liner type: Liner Seams. Welded Factory	Thickness mul LLDPI	DE HDPE PVD Other 234567897
Below-grade tank: Subsection I of 19.1	5 17 11 NMAC	S HEOLIVE
Volume bbl	Type of fluid:	and automatic overflow shut-off  her    Comparison of the comparis
Tank Construction material.	Type of finite.	
Secondary containment with leak detection	Visible sidewalls, liner, 6-inch lift a	and automatic overflow shut-off
	Visible sidewalls only Other	10212223
Liner Type Thickness mi		her
5 Alternative Method:		
		Francisco (F. C. 1997)
Submittal of an exception request is required.	exceptions must be submitted to the Santa Fe E	Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)  Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)  Four foot height, four strands of barbed wire evenly spaced between one and four feet  Alternate. Please specify						
Netting: Subsection E of 19.15.17 11 NMAC (Applies to permanent pits and permanent open top tanks)  Screen Netting Other  Monthly inspections (If netting or screening is not physically feasible)						
Signs: Subsection C of 19 15.17.11 NMAC  12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers  X Signed in compliance with 19.15.3 103 NMAC						
Administrative Approvals and Exceptions:  Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.  Please check a box if one or more of the following is requested, if not leave blank:  Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for consideration of approval.  Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.						
Siting Criteria (regarding permitting): 19.15.17.10 NMAC  Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.						
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank.  - NM Office of the State Engineer - iWATERS database search; USGS, Data obtained from nearby wells	Yes No					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).  - Topographic map; Visual inspection (certification) of the proposed site	Yes No					
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applies to temporary, emergency, or cavitation pits and below-grade tanks)	Yes No					
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image						
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.  (Applied to permanent pits)	Yes No					
<ul> <li>Visual inspection (certification) of the proposed site; Aerial photo; Satellite image</li> <li>Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.</li> </ul>	Yes No					
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site						
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended  - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No					
Within 500 feet of a wetland.  - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes No					
Within the area overlying a subsurface mine.  - Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes No					
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	Yes No					
Within a 100-year floodplain - FEMA map	Yes No					

Form C-144 Oil Conservation Division Page 3 of 5

16 *Weste Donor L. Closure For Closed Law Systems That Helling About Cround Steel	Tonks on Houl off Dire Only (10.15.17.12.D.M.)						
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Instructions Please identify the facility or facilities for the disposal of liquids, drilling fluore required.	tanks of Haut-off Bins Univ: (19.15.17.13.D NMAC) uids and drill cuttings. Use attachment if more than two fa	cilities					
•	Disposal Facility Permit #.						
	Disposal Facility Permit #:						
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for future service and operations?  Yes (If yes, please provide the information No							
Required for impacted areas which will not be used for future service and operations:  Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19.15.17 13 NMAC  Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC  Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC							
17							
Siting Criteria (Regarding on-site closure methods only: 19.15.17 10 NMAC Instructions: Each siting criteria requires a demonstration of compliance in the closure plan Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval Justifications and/or demonstrations of equivalency are required Please refer to 19.15 17 10 NMAC for guidance.							
Ground water is less than 50 feet below the bottom of the buried waste - NM Office of the State Engineer - iWATERS database search; USGS. Data obtain	ed from nearby wells	Yes X No					
Ground water is between 50 and 100 feet below the bottom of the buried waste  - NM Office of the State Engineer - iWATERS database search; USGS; Data obtain	ed from nearby wells	Yes X No					
Ground water is more than 100 feet below the bottom of the buried waste.		X Yes No					
NM Office of the State Engineer - IWATERS database search; USGS; Data obtain	ed from nearby wells	N/A					
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant (measured from the ordinary high-water mark).	nt watercourse or lakebed, sinkhole, or playa lake	Yes X No					
- Topographic map; Visual inspection (certification) of the proposed site							
Within 300 feet from a permanent residence, school, hospital, institution, or church in ex  - Visual inspection (certification) of the proposed site; Aerial photo; satellite image	istence at the time of initial application	Yes X No					
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application.  - NM Office of the State Engineer - iWATERS database, Visual inspection (certification) of the proposed site  Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.							
<ul> <li>Written confirmation or verification from the municipality; Written approval obtain</li> <li>Within 500 feet of a wetland</li> </ul>	ned from the municipality						
- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspec	tion (certification) of the proposed site	Yes X No					
Within the area overlying a subsurface mine.  - Written confirantion or verification or map from the NM EMNRD-Mining and Mil	neral Division	Yes X No					
Within an unstable area.  - Engineering measures incorporated into the design; NM Bureau of Geology & Mine	eral Resources; USGS; NM Geological Society;	Yes X No					
Topographic map Within a 100-year floodplain FEMA map		Yes XNo					
18							
On-Site Closure Plan Checklist: (19.15.17 13 NMAC) Instructions: Each of by a check mark in the box, that the documents are attached.	the following items must bee attached to the closure	e plan. Please indicate,					
X Siting Criteria Compliance Demonstrations - based upon the appropriate r	requirements of 19 15 17.10 NMAC						
X Proof of Surface Owner Notice - based upon the appropriate requirements	of Subsection F of 19.15.17 13 NMAC						
Construction/Design Plan of Burnal Trench (if applicable) based upon the	appropriate requirements of 19.15.17 11 NMAC						
Construction/Design Plan of Temporary Pit (for in place burial of a drying	g pad) - based upon the appropriate requirements of 19	15 17 11 NMAC					
X Protocols and Procedures - based upon the appropriate requirements of 19	0.15.17.13 NMAC	]					
Confirmation Sampling Plan (if applicable) - based upon the appropriate r	-						
X Waste Material Sampling Plan - based upon the appropriate requirements							
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and	•	not be achieved)					
X Soil Cover Design - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection X Re-vegetation Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subsection Plan - based upon the appropriate requirements of Subs							
X   Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC   Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC							

19				
Operator Application				
I hereby certify that the	information submitted with this application is true, accu			
Name (Print).	Crystal Tafoya	Title:	Regulatory Technician	
Signature:	Canstal Tologo	Date	1/2/09	
e-mail address:	crystal.tafoya@conocophillips.dom	Telephone:	505-326-9837	
20				
OCD Approval:	Permit Application (including closure plan)	Closure Plan (only)	OCD Conditions (see attachment)	
OCD Representative	Signature: Branch Sall		Approval Date:	<u></u> 9
				_
Title:	Envirolsper	OCD Perr	nit Number:	<del></del>
21				
	uired within 60 days of closure completion): Sub- are required to obtain an approved closure plan prior t			The closure
•	submitted to the division within 60 days of the completion			
approved closure plan h	as been obtained and the closure activities have been c	ompleted.		
		Closur	e Completion Date:	
22 Closure Method:				
	on and Removal On-site Closure Method	Alternative Closure	Method Waste Removal (Closed-loop sys	tems only)
=	a approved plan, please explain.		Waste Removal (Closed-100p sys	icins omy)
The different from	approved plan, please explant.			
23				
	ding Waste Removal Closure For Closed-loop System			
were utilized.	entify the facility or facilities for where the liquids, dril	ung jiuias ana ariti cutti	ngs were disposed. Use attachment if more than	i two facilities
Disposal Facility Na	me·	Disposal Facility	Permit Number:	
Disposal Facility Na			Permit Number:	
,	p system operations and associated activities performed	-		
Yes (If yes, plea	se demonstrate complilane to the items below)	No		
Required for impacte	ed areas which will not be used for future service and of	perations:		
Site Reclamation	n (Photo Documentation)			
Soil Backfilling	and Cover Installation			
Re-vegetation A	application Rates and Seeding Technique			
24				
	ttachment Checklist: Instructions: Each of the foll	owing items must be atte	ched to the closure report. Please indicate, by a	check mark in
	cuments are attached.			
	re Notice (surface owner and division)			
=	Notice (required for on-site closure)			
	on-site closures and temporary pits)			
=	Sampling Analytical Results (if applicable)			
<b>=</b>	I Sampling Analytical Results (if applicable)			
<b>=</b> '	ity Name and Permit Number			
= '	g and Cover Installation			
Re-vegetation	Application Rates and Seeding Technique			
Site Reclamati	on (Photo Documentation)			
On-site Closur	e Location: Latitude:	Longitude:	NAD [ ] 1927 [ ]	1983
25				
Operator Closure Co	ertification:			
	information and attachments submitted with this closure	-		lief. I also certify that
the closure complies wit	th all applicable closure requirements and conditions sp	ecified in the approved (	tosure plan.	
Name (Print)		Title <sup>.</sup>		
Signature:		Date:		
e-mail address		Telenhone:		

# New Mexico Office of the State Engineer POD Reports and Downloads


Town	ship: 31N	Range: 09W	Sections: 25	,26,27,34	1,35,36	,
NAD27	X:	Y:	Zone:		Search Radius:	
County:		Basin:		Ž	Number:	Suffix:
Owner Name: (	First)	(L	ast) • All		O Non-Domestic	① Domestic
	POD / Sur	face Data Repor	t Ave		o Water Report	<b>.</b>
		Clear Form	iWATERS Me	enu	Help	
	,	•	u. s uuw.			to the second second to the second second to the second se
		W.	ATER COLUMN R	EPORT :	12/31/2008	
POD Number SJ 00016	· -		-	•	Depth Y Well 118	Depth Wate Water Colum


Record Count: 1

# New Mexico Office of the State Engineer POD Reports and Downloads

Township: 30N Range: 09W Sections: 1,2,3 Search Radius: NAD27 X: Y: Zone: County: Number: Suffix: Basin: Owner Name: (First) Non-Domestic Domestic (Last) • All POD / Surface Data Report Avg Depth to Water Report Water Column Report Clear Form iWATERS Menu Help WATER COLUMN REPORT 12/31/2008 (quarters are 1=NW 2=NE 3=SW 4=SE) (quarters are biggest to smallest) Depth Depth Wat€ POD Number Tws Rng Sec qqq Х Well Water Colum

No Records found, try again

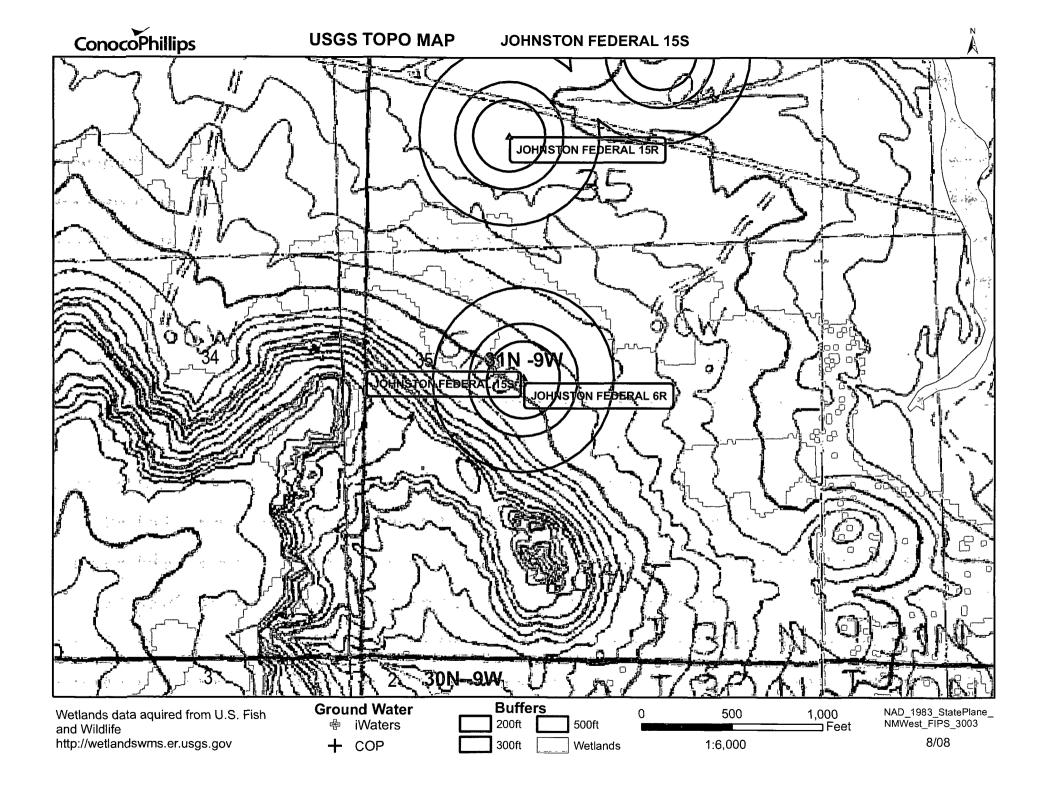

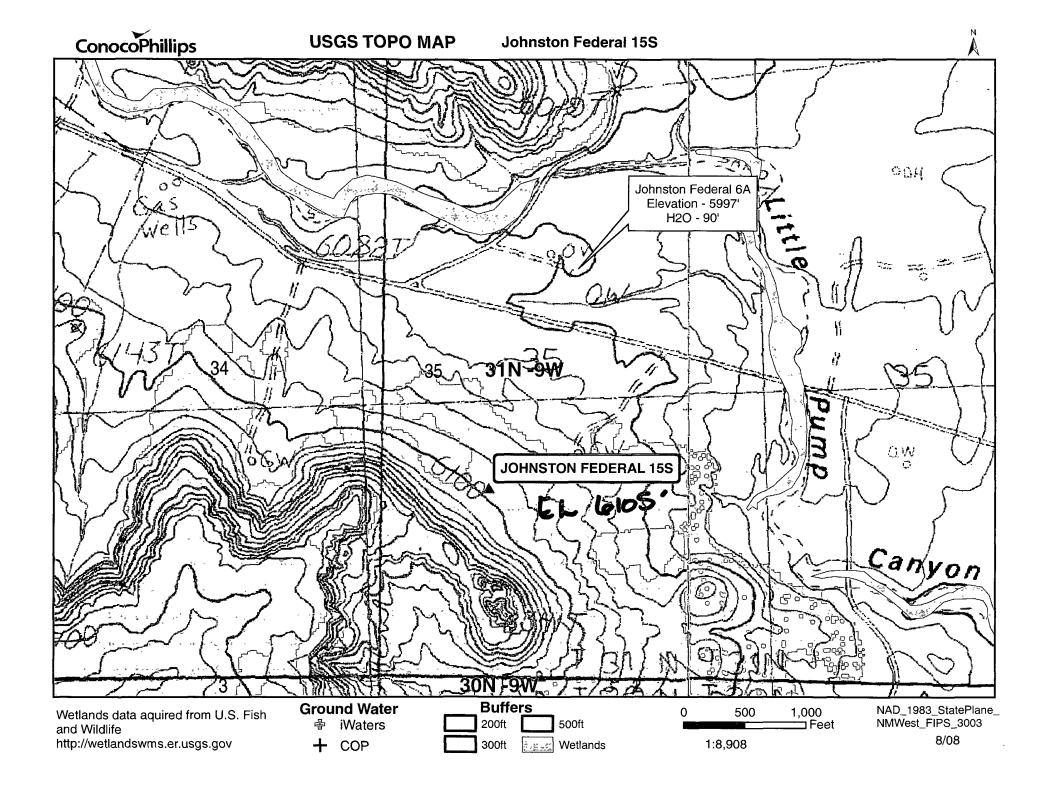


# DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO

Operator Meridian Oil Inc. Location: Unit F Sec. 35 Twp3/ Rng 9
Name of Well/Wells or Pipeline Serviced Johnston Fel 415 and 64
2318-w
Elevation 6/26 Completion Date/0.25 Total Depth 320 Land Type 1
Casing Strings, Sizes, Types & Depths Set 80 of 84 P.O.C.
easing.
If Casing Strings are cemented, show amounts & types used Used 30
secks of neet cement.
If Cement or Bentonite Plugs have been placed, show depths amounts used
95' 70 75' 4 sacks coment.
Depths & thickness of water zones with description of water: Fresh Clear,
Salty, Sulphur, Etc. 90' and was clear.
Depths gas encountered: 320
Ground bed depth with type & amount of coke breeze used: 330 with
40 socks Asbury 45.18.
Depths anodes placed: "/ 15 of 595' and "15 is of 175"
Depths vent pipes placed: 295' fo surface.
Vent pipe perforations: Vent pipe is perforated up ton
Remarks: nECEIVEM
N == 28 4 1002
ON COM DIV.
If any of the above data is unavailable, please indicate so. Copies of all


logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.


Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.


Form 9-33: (KeV. 5-68)	[	JNITED :	STATES	SUBMI	r in DUPLI	CATE •	F	Form approved.  Budget Bureau No. 42-R\$55.5/
•	DEPART			TERIOR	etr	e other in- uctions on		SIGNATION AND SERIAL NO.
			L SURVEY		rev	verse side)	SF 0784	
				13	CL			ALLOTTER OR TRIBE NAME
	MPLETION C		PLETION I	KEPOKT"	AND LC	)G +	1	
In. TYPE OF WEL	L: OIL WELL	WELL X	DRY	other		1:2	7 NIT AGRE	EVENT NAME
L TYPE OF COM	PLETION:	PLTG []	DIFF.	1				
WELL X	OVER LEN	BACK	EESVR .	Other	SEOFOCICA	L SHIPHEY		on-Federal
Inton Tayas	Petroleum,	A Division	of Allied	, ,,	ALC: 1	ration	9. WELL NO.	on-rederar
3. ADDRESS OF OPER					- Otopo.			6 A
Suite 1122,	1860 Lincoli	n Street,	Denver, Co	lorado	80203		10. FIELD AND	D POOL, OR WILDCAT
4 LOCATION OF WEL	L (Report location c	learly and in acc	cordance with an	y State require	menta)*		Blanco	Mesaverde Field
At surface SE NW Section	on 35-T31N-R	9W (1850'	FNL. 1620'	FWL)			11. SEC., T., R	L, M., OR BLOCK AND BURYEY
	erval reported below	(0000		1			0	. 25 main pou
Same At total depth				(ot)		)	Section	n 35-T31N-R9W
		í	14 PERMIT NO.		ATE ISSUED		12. COUNTY O	R 13. STATE
Same				1	1 4/397	9 .	San Jua	n New Mexico
15 DATE SPUDDED	16. DATE T.D. REAC	HED 17. DATE	OMPL (Ready to	7	EL EVATIONS			19 ELEV CASINGHEAD
5/8/75	5/20/75		7/75		~:~ <b>59</b> .97 (		'-	5998
20 TOTAL DEPTH, MD 4		ACK T.D., MD & TV	D 22 IF MULT			TERVALS VILLED BY	ROTARY TOOL	
5300		0210	SOTTOM NAME (V	ID AND TYLLS	!	<u>→</u> !	Surface (	to total depth
	Verde 4351-							SUBVET MALE NO
								i
26 TYPE BLECTRIC A								27 WAS WELL CORED
Densilog, Te	emperature,	LL-GR, SWN	-GR					No
CASING SIZE	WEIGHT, LB./FT.	CASING	G RECORD (Rep	ort all strings .E SIZE		EMENTING B		- , <del></del>
9-5/8"	36	256		-3/4"		275 sx		MOUNT PULLED
7-370	23	3177		-3/4		430 sx		None None
′ - <del></del>	23							- None
29.	LIN	ER RECORD			30	Т	UBING RECO	RI
812.5			ACRE CEMENTS	SCREEN (MD			EPTH SET (VD	; ·
4-1/2"	2932	<u>5272</u>	310		2-3/	/ 8:	5187	None
21 PERFORATION BEC	ond (Interval, size a	nd number)		82.	ACID. SHO	T. FRACTU	JRE. CEMENT	SQUEEZE, ETC.
	ut: 4 holes			DEPTH INTE				OF MATERIAL USED
	noles 5170-7:			5086-51				tr & 30,000# sand
	: 1 holes 41 1 hole 4585.			4351-46	88	50,80	0 gal. wt	er & 51,000# sand
holes 4644-4	-	-	<b>-</b> , 5			_		<del>.</del> . <del></del>
33 *	, , , , , , , , , ,		PROF	CTION		!		
DATE FIRST PRODUCTS			wing, gas lift, pu		nd type of p	ump)		STATES (Producing or
7/7/75	5   1	flowing					SI w	vaiting on pipeline
7/7/75	HOLRS TESTED	3/4"	PROD'N. FOR TEST PERIOD	OILBBL	9.18	465	WATERBBI.	GAS OIL BATTO
PLOW. TUBING PRIMES.	CASING PRESSURE	CALCULATED	OIG-BBL.	GASM	cr.	WATER-	RBL.	OIL GRAVITY-API (CORR )
259	550	24-HOUR BATE			3719			
34 DISPOSITION OF GA	8 (Sold, used for fue	i, vented, etc.)				}	TEST WITNESS	_
Vented						i	Don E	Barnes
35 LIST OF ATTACES	NA S							
36 I hereby certify	that the foregoing a	ng attached info	rmation is compl	ete and correc	t as determi	und from a	il available re	cords
f	an Pour							
SIGNED /	CYLL'SC	K112	TITI E ASS	istant D	ist. Erc	o. man	ager DAPE	7/14/75

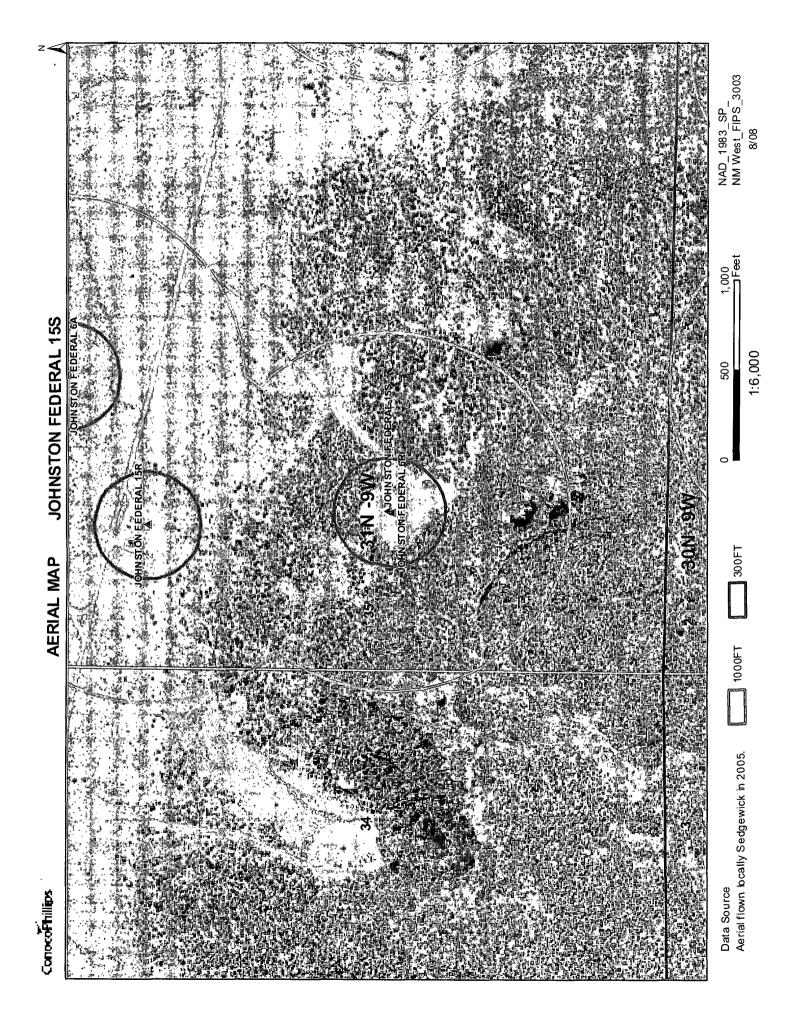

# MMQonline Public Version Map

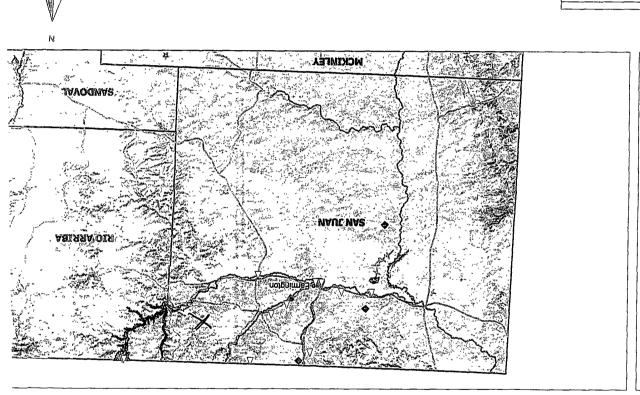

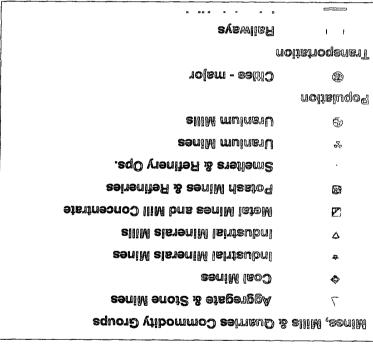

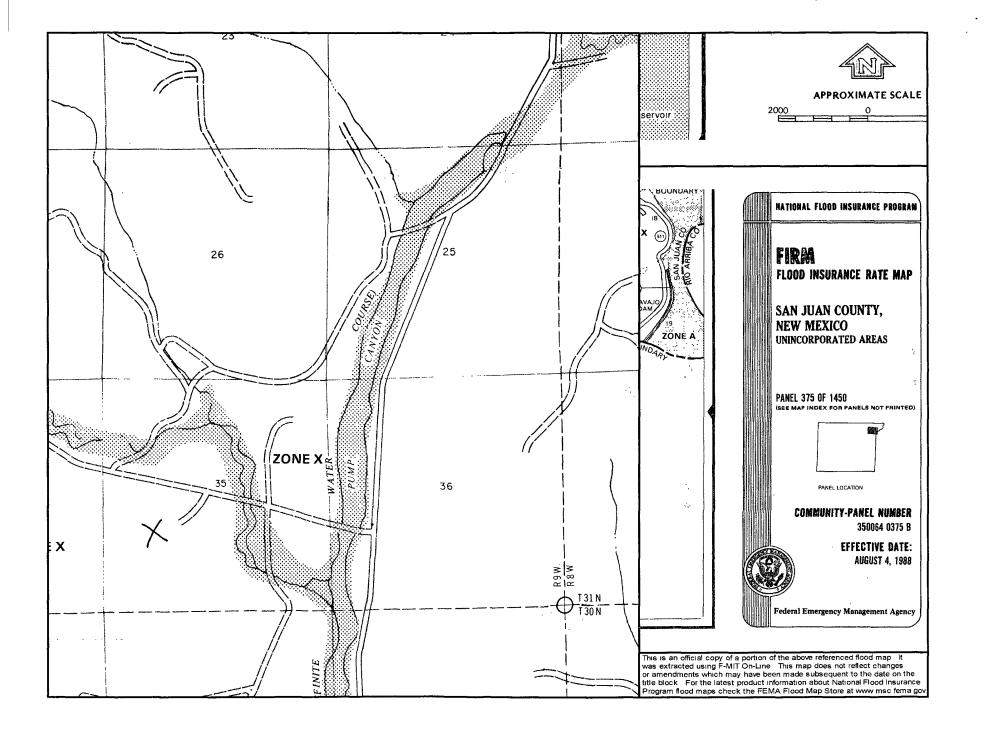

### Hydrogeological report for Johnston Federal 15S

#### Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.

#### Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The Johnston Federal 15S is not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The Cathodic well data from the Johnston Federal 6A has an elevation of 5997' and groundwater depth of 90'. The subject well has an elevation of 6105' which is 108' greater than the Johnston Federal 6A, therefore the groundwater depth is greater than 100'. There are no iWATERS data points located in the area as indicated on the TOPO Map. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

# Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Wednesday, December 31, 2008 2:02 PM

To:

'mark\_kelly@nm.blm.gov'

Cc:

Tafoya, Crystal

Subject:

Johnston Federal 15S

The subject wells location has a temporary pit that will be closed on-site. Please let me know if you have any questions.

Thank you,

Crystal L. Tafoya Regulatory Technician *ConocoPhillips Company* San Juan Business Unit Phone: (505) 326-9837

Email: Crystal.Tafoya@conocophillips.com

DESTRICT I 1625 M. French Dr., Hobbs, M.M. 88240

### State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised August 15, 2000

DESTRICT II 811 South First, Artesia, N.M. 88210

DISTRICT HI 1000 Rio Bresco Rd., Artec, N.M. 87410

# OIL CONSERVATION DIVISION 2040 South Pacheco Santa Fe, NM 87505

Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT IV 2040 South Pachace, Santa Fe, NM 87606

☐ AMENDED REPORT

### WELL LOCATION AND ACREAGE DEDICATION PLAT

30-045- 32	29 Pool Code 71629	*Pool Name Basin Fruitland Coal		
<sup>4</sup> Property Code 7208	P <sub>2</sub> JOHN	*Well Humber		
*OGRID No. 14538		perator Name CES OIL & GAS COMPANY LP	° Heretica 6105	

<sup>10</sup> Surface Location

UL or lot no.	Section	Township	Range	Lot Idia	Feet from the	North/South line	Feet from the	East/West line	County
L	35	31-N	9-W		1560	SOUTH	880	WEST	SAN JUAN

<sup>11</sup> Bottom Hole Location If Different From Surface

UL or lot no. Section Towns	hip Range Lot Idm	Feet from the North/South line	Peet from the	East/West line	County
W/314.25	3 Joint or Infill	<sup>14</sup> Comsolidation Code	2 Order Ho.		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

LOT 4	LOT 3	LOT 2	LOT 1	17 OPERATOR CERTIFICATION  I hereby certify that the information contained hereta to true and complete to the best of any inventedge and belief.  Sugnetures
LOT 5 SF-( FD 3 1/4" BLM BC. 1966	LOT 6 078439	MAR ROTT	004 LOT-8	Joni Clark  Printed Name Regulatory Assistant Title 12-10-03 Date
(A) 12-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-		  1090' N. (NAD 27)  G. 107'45.3376' W.   LOT 10	LOT 9	18 SURVEYOR CERTIFICATION I hereby certify that the well location about an finis plat was plotted from field noise of actual servoys made by me or under my supervision, and that the same is true and correct to the first of my belief.
ED 3 1/4" BUM S 88	LOT 14 28-38 E 2.03' (W)	LOT 15 FD 3 1/4" BLM BC. 1951	LOT 16	Dete of Street  Signature and 194 5 27 materials reverse:  100 TESSION  Certificate Funder

## Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

#### General Plan:

- 1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011).
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to closure to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
  - i. Operator's name
  - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

EPA SW-846 8021B or 8260B	0.2
EPA SW-846 8021B or 8260B	50
EPA SW-846 418.1	2500
EPA SW-846 8015M	500
EPA 300.1	(1000/500
	EPA SW-846 8021B or 8260B EPA SW-846 418.1 EPA SW-846 8015M

- 9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Reshaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 13. Notification will be sent to OCD when the reclaimed area is seeded.
- 14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100 Two lots of seed can be compared on the basis of PLS as follows:

Source No. One (poor quality)

Purity

50 percent

Germination

40 percent

Percent PLS

20 percent

Percent PLS

Source No. two (better quality)

Purity

80 percent

Germination

63 percent

Percent PLS

50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 ib. PLS 1 lb. PLS

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.