

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

JAN 22 2008

FORM APPROVED  
OMB NO. 1004-0137  
Expires March 31, 2007


## APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. <b>NMM 30014</b>	
1b. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name	
2. Name of Operator <b>Energex Resources Corporation</b>		7. Unit or CA Agreement Name and No.	
3a. Address <b>2010 Afton Place Farmington, New Mexico 87401</b>		8. Lease Name and Well No. <b>Carracas 16 B #1</b>	
3b. Phone No. (include area code) <b>(505) 325-6800</b>		9. API Well No. <b>30-039-30465</b>	
4. Location of Well (Report location clearly and in accordance with any State requirements)* At surface <b>1385 fnl, 1525 fwl</b> At proposed prod. zone <b>760 fnl, 760 fel</b>		10. Field and Pool, or Exploratory <b>Basin Fruitland Coal</b>	
14. Distance in miles and direction from nearest town or post office* <b>Approx 11 miles SE of Arboles, CO.</b>		11. Sec., T., R., M., or Blk and Survey or Area <b>(E) Sec 16, T32N, R4W</b>	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drg. unit line, if any) <b>760'</b>	16 No. of Acres in lease <b>2480.00</b>	17. Spacing Unit dedicated to this well <b>N/2 - 320.00 acres</b>	
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. <b>50'</b>	19. Proposed Depth <b>6151' (MD)</b>	20. BLM/BIA Bond No. on file <b>NM 2707</b>	
21. Elevations (Show whether DF, KDB, RT, GL, etc.) <b>6860' GL</b>	22. Approximate date work will start* <b>5/15/08</b>	23. Estimated duration <b>25 days</b>	

## 24. Attachments


The following, completed in accordance with the requirements of Onshore Oil and Gas Order No 1, shall be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification.
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature 	Name (Printed/Typed) <b>Nathan Smith</b>	Date <b>1/11/08</b>
--	---	------------------------

Title

**Drilling Engineer**

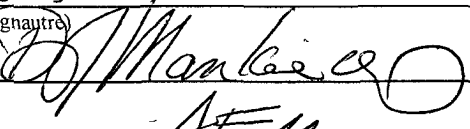Approved by (Signature) 	Name (Printed/Typed) <b>AFM</b>	Date <b>2/24/09</b>
--	------------------------------------	------------------------

Title

Office

**FFO**Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.  
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*(Instructions on page 2)

**NOTIFY AZTEC OCD 24 HRS  
PRIOR TO CASING & CEMENT  
SEE ATTACHED FOR  
CONDITIONS OF APPROVAL**

Hold C104

for Directional Survey  
and "As Drilled" platThis action is subject to technical and  
procedural review pursuant to 43 CFR 3165.3  
and appeal pursuant to 43 CFR 3165.4**NMOCD****BLM'S APPROVAL OR ACCEPTANCE OF THIS  
ACTION DOES NOT RELIEVE THE LESSEE AND  
OPERATOR FROM OBTAINING ANY OTHER  
AUTHORIZATION REQUIRED FOR OPERATIONS  
ON FEDERAL AND INDIAN LANDS**DRILLING OPERATIONS AUTHORIZED ARE  
SUBJECT TO COMPLIANCE WITH ATTACHED  
"GENERAL REQUIREMENTS".A COMPLETE C-144 MUST BE SUBMITTED TO AND  
APPROVED BY THE NMOCD FOR: A PIT, CLOSED  
LOOP SYSTEM, BELOW GRADE TANK, OR  
PROPOSED ALTERNATIVE METHOD, PURSUANT TO  
NMOCD PART 19.15.17, PRIOR TO THE USE OR  
CONSTRUCTION OF THE ABOVE APPLICATIONS.

MAR 09 2009



DISTRICT I  
1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico  
Energy, Minerals & Natural Resources Department

Form C-102  
Revised October 12, 2005

DISTRICT II  
1301 W. Grand Avenue, Artesia, N.M. 88210

DISTRICT III  
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV  
1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

Submit to Appropriate District Office  
State Lease - 4 Copies  
Fee Lease - 3 Copies

RCVD AUG 25 '08

☐ AMENDED REPORT  
OIL CONS. DIV.

WELL LOCATION AND ACREAGE DEDICATION PLAT

DIST. 3

<sup>1</sup> API Number 30.039.30405	<sup>2</sup> Pool Code 71629	<sup>3</sup> Pool Name BASIN FRUITLAND COAL
<sup>4</sup> Property Code 35656	<sup>5</sup> Property Name CARRACAS 16B	<sup>6</sup> Well Number 1
<sup>7</sup> GRID No. 162928	<sup>8</sup> Operator Name ENERGEN RESOURCES CORPORATION	<sup>9</sup> Elevation 6860'

<sup>10</sup> Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
F	16	32N	4W		1385'	NORTH	1525'	WEST	RIO ARRIBA


<sup>11</sup> Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
A	16	32N	4W		760'	NORTH	760'	EAST	RIO ARRIBA

<sup>12</sup> Dedicated Acres 320.00 Acres - (N/2)	<sup>13</sup> Joint or Infill	<sup>14</sup> Consolidation Code	<sup>15</sup> Order No.
---	-------------------------------	----------------------------------	-------------------------

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED  
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16

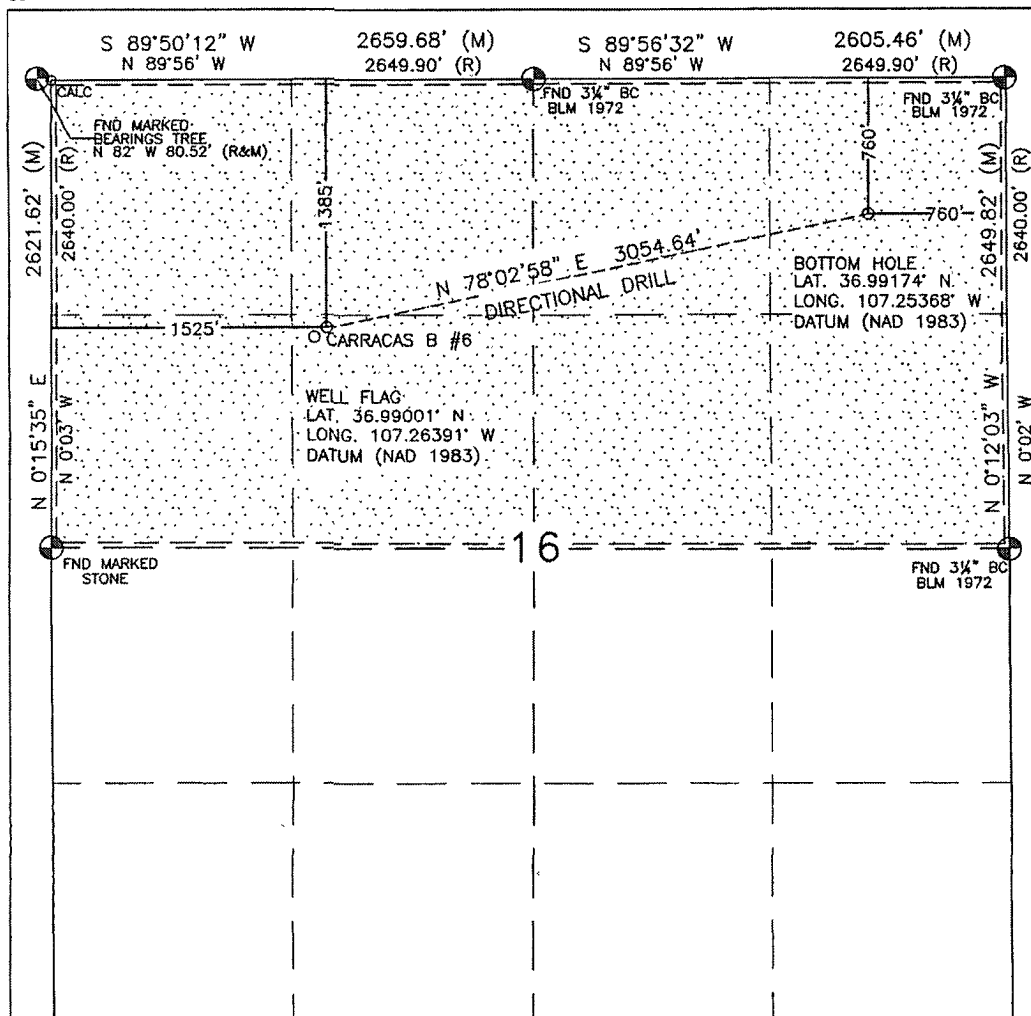

<sup>17</sup> OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner or a compulsory pooling order heretofore entered by the division.

*Nathan Smith* 8/22/08  
Signature Date

*Nathan Smith*  
Printed Name

<sup>18</sup> SURVEYOR CERTIFICATION


I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

OCTOBER 24, 2007

Date of Survey

Signature and Seal of Professional Surveyor:

*David R. Russell*



DAVID RUSSELL

Certificate Number

10201

## Operations Plan

January 10, 2008

### **Carracas 16 B #1**

#### **General Information**

Location	1385 fnl, 1525 fwl at surface 760 fnl, 760 fwl at bottom nene 16, T32N, R4W Rio Arriba County, New Mexico
Elevations	6860' GL
Total Depth	6151' (MD), 3609' (TVD)
Formation Objective	Basin Fruitland Coal

#### **Formation Tops**

San Jose	Surface
Nacimiento	1685' (TVD)
Ojo Alamo Ss	3060' (TVD), 3093' (MD)
Kirtland Sh	3184' (TVD), 3246' (MD)
Fruitland Fm	3225' (TVD), 3300' (MD)
Top Coal	3585' (TVD), 4069' (MD)
Bottom Coal	3609' (TVD)
<b>Total Depth</b>	<b>3609' (TVD), 6151' (MD)</b>

#### **Drilling**

The 12 ¼" wellbore will be drilled with a fresh water mud system.

The 8 ¾" wellbore will be drilled with a low solids fresh water/polymer mud system. Weighting materials will be drill cuttings and if needed barite. Mud density is expected to range from 8.9 ppg to 9.5 ppg.

**Projected KOP is 2450' TVD with 4.98°/100' doglegs.**

The 6 ¼" wellbore will be drilled with a fresh water or brine water system depending on reservoir characteristics. Anticipated BHP can be as high as 1100 psi.

Blowout Control Specifications:

A 2000 psi minimum double ram or annulus BOP stack will be used following nipple up of casing head. During air drilling operations, a Shaffer Type 50 or equivalent rotating head will be installed on top of the stack. A 2" nominal, 2000 psi minimum choke manifold will also be used. An upper Kelly Cock valve handle and drill string valve should be available to fit each drill string and be available on the rig floor during drilling operations.

Logging Program:

Open hole logs: None

Mud logs: From 3225' (TVD), 3300' (MD) to TD.

Surveys: Surface to KOP every 500' and a minimum of every 250' for directional.

## Tubulars

### Casing, Tubing, & Casing Equipment:

String	Interval	Wellbore	Casing	Csg Wt	Grade
Surface	0'-200'	12 1/4"	9 5/8"	32.3 ppf	H-40 ST&C
Intermediate	0'-3600' (TVD) 4330' (MD)	8 3/4"	7"	23.0 ppf	J-55 LT&C
Production	3585'-3609' (TVD) 4230'-6151' (MD)	6 1/4"	4 1/2"	11.6 ppf	J-55 LT&C
Tubing	0'-4150' (MD)		2 3/8"	4.7 ppf	J-55

### Casing Equipment:

Surface Casing: Depending on wellbore conditions, a Texas Pattern Guide Shoe on bottom. Casing centralization with standard bow spring centralizers to achieve optimal standoff.

Intermediate Casing: Depending on wellbore conditions, a Cement nose guide shoe with self fill insert float collar on top of bottom joint and casing centralization with standard bow spring and rigid centralizers to optimize standoff. Two turbolating centralizers at the base of the Ojo Alamo are recommended.

Liner: Bull nose guide shoe on bottom of first joint, H-Latch liner drop off tool on top of last joint.

## Wellhead

3000 psi 11" x 9 5/8" casing head. 9 5/8" x 7" x 2 3/8" 3000 psi Flanged Wellhead .

## Cementing

Surface Casing: 125 sks Std (class B) with 2.0 % CaCl<sub>2</sub> and 1/4 #/sk Flocele (15.6 ppg, 1.18 ft<sup>3</sup>/sk 148 ft<sup>3</sup> of slurry, 100% excess to circulate to surface). WOC 12 hours. Pressure test surface casing to 600 psi for 30 min.

Intermediate Casing: Before cementing, circulate hole at least 1 1/2 hole volumes of mud and reduce funnel viscosity to minimum to aide in hole cleanout. Depending on wellbore conditions, cement may consist of 625 sks 65/35 with 6.0 % Bentonite, 2.0 % CaCl<sub>2</sub>, 10 #/sk Gilsonite, and 1/2 #/sk Flocele (12.3 ppg, 1.96 ft<sup>3</sup>/sk) and a tail of 125 sks Type V with 1/4 #/sk Flocele (15.6 ppg, 1.18 ft<sup>3</sup>/sk). (1498 ft<sup>3</sup> of slurry, 100 % excess to circulate to surface). Test casing to 1200 psi for 30 min.

## Other Information

- 1) This well will be an open hole completion lined with an uncemented pre-drilled liner.
- 2) If lost circulation is encountered, sufficient LCM will be added to the mud system to maintain well control. The intermediate string may need to be cemented in multiple stages with a slurry design deviated from that listed above.
- 3) If high reservoir pressures or water flows are encountered slurry design may need to be deviated to from those listed above to satisfy wellbore and formation conditions.
- 4) No abnormal temperatures or pressures are anticipated. This gas is dedicated.



Project: Carson Nat'l Forest - NE S16, T32N, R4W  
Site: Carracas Mesa  
Well: Carracas 16 B #1  
Wellbore: Preliminary Plan  
Plan: Plan #1 (Carracas 16 B #1/Preliminary Plan)

PROJECT DETAILS: Carson Nat'l Forest - NE S16, T32N, R4W

Geodetic System: US State Plane 1983  
Datum: North American Datum 1983  
Ellipsoid: GRS 1980  
Zone: New Mexico Central Zone  
System Datum: Mean Sea Level





Azimuths to True North  
Magnetic North: 10.12°

Magnetic Field  
Strength: 51305.3snT  
Dip Angle: 63.86°  
Date: 1/10/2008  
Model: IGRF200510


SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	2450.0	0.00	0.00	2450.0	0.0	0.0	0.00	0.00	0.0	KOP
3	4281.6	91.23	78.16	3600.0	241.0	1150.0	4.98	78.16	1175.0	Land Curve
4	6151.5	88.77	78.13	3600.0	625.0	2980.0	0.13	-179.31	3044.8	TD Lateral

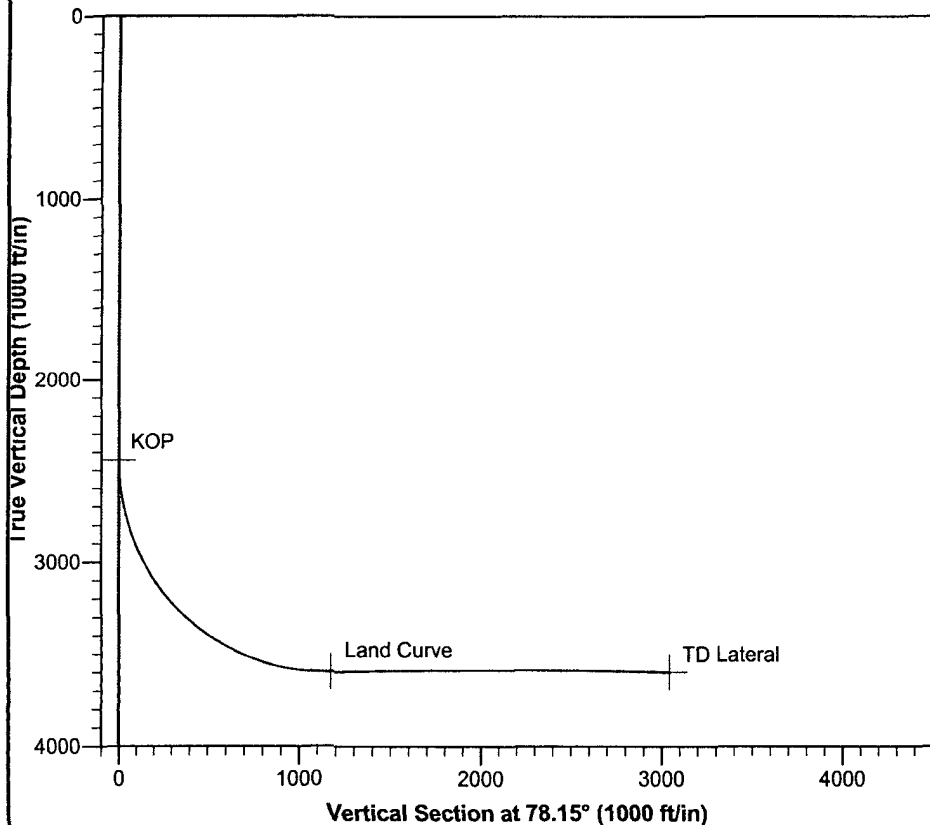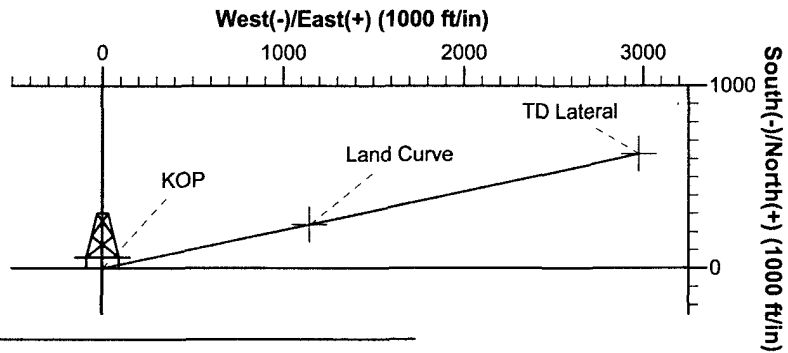

## Energen Resources Corporation

### Typical 2000 psi Choke Manifold Configuration

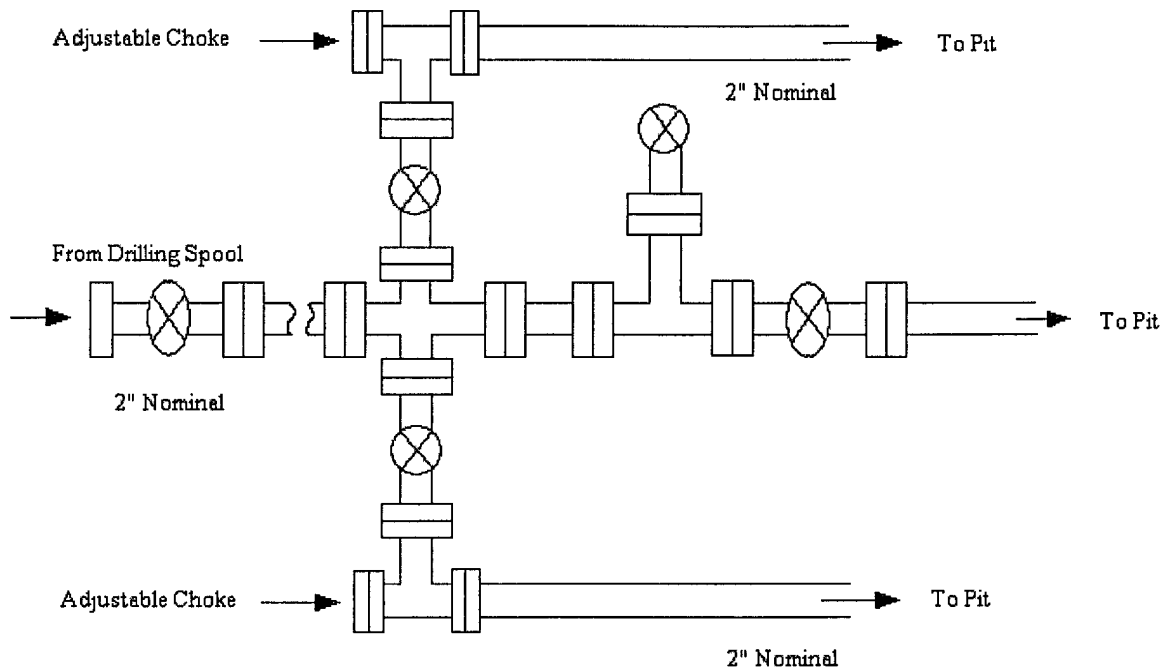

Choke manifold installed from surface to TD

## Energen Resources Corporation

### Typical BOP Configuration for Gas Drilling

