1625 N. Freich Dr., Hobbs, NM 88240

District II 1301 W Grand Ave, Artesia, NM 88210 District III

1000 Rio Brazos Rd, Aztec, NM 87410

District IV

State of New Mexico **Energy Minerals and Natural Resources** Department

Oil Conservation Division 1220 South St. Francis Dr. Santa Fe, NM 87505

July 21, 2008 For temporary pits, closed-loop sytems, and below-grade

Form C-144

tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the

1220 S St Francis Dr , Santa Fe, NM 87505	appropriate Ninoco District Office
2175	Pit, Closed-Loop System, Below-Grade Tank, or
Ol Propos	sed Alternative Method Permit or Closure Plan Application
Type of action: [[Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method Modification to an existing permit X Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method
•••	blication (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the
• • •	we the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances
Operator: Burlington Resources Oil & Address: PO Box 4289, Farmington,	
	-5 UNIT 909 AND SAN JUAN 27-5 UNIT 913 (TWIN)
API Number: 300393031	18 & 3003930309 OCD Permit Number
U/L or Qtr/Qtr: N(SE/SW) Section Center of Proposed Design: Latitude: Surface Owner: Federal	8 Township: 27N Range: 5W County: Rio Arriba 36.582983 °N Longitude: 107.384567 °W NAD: 1927 X 1983 State X Private Tribal Trust or Indian Allotment
	vitation P&A er type: Thickness 20 mil X LLDPE PVC Other
_ _	type: Thicknessmil
Below-grade tank: Subsection I o Volume: bbl Tank Construction material: Secondary containment with leak detection of the containment with leak detection of the containment with leak detection of the containment of the containment with leak detection of the containment with leak detectio	of 19.15.17.11 NMAC Type of fluid: OIL CONS. DIV. DIST. 3
5 Alternative Method: Submittal of an exception request is required.	tred. Exceptions must be submitted to the Santa Fe Environmental Rureau office for consideration of approval

Fencing: Subsection D of 19.15.17.11 NMAC (Applies to permanent pit, temporary pits, and below-grade tanks)				
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)				
Four foot height, four strands of bailed wire evenly spaced between one and four feet		,		
X Alternate. Please specify 4' hogwire fence with a single strand of barbed wire on top.				
7				
Netting: Subsection E of 19 15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)				
Screen Netting Other				
Monthly inspections (If netting or screening is not physically feasible)				
8 Signs: Subsection C of 19 15.17.11 NMAC				
12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers				
X Signed in compliance with 19.15.3.103 NMAC	·			
9				
Administrative Approvals and Exceptions: Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.				
Please check a box if one or more of the following is requested, if not leave blank:				
Administrative approval(s): Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons	ideration of app	roval.		
(Fencing/BGT Liner) Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.				
Exception(s) requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.				
10 Siting Criteria (regarding permitting): 19.15.17.10 NMAC				
Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable				
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for				
consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria				
does not apply to drying pads or above grade-tanks associated with a closed-loop system.				
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - 1WATERS database search; USGS; Data obtained from nearby wells	Yes	No		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa	Yes	No		
lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial	□Yes	Пло		
application.				
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	□NA			
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image		ш.,		
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	∐No		
 (Applied to permanent pits) Visual inspection (certification) of the proposed site; Aerial photo; Satellite image 	∐NA			
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering	∏Yes	□No		
purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.				
- NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site.	}			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance	Yes	No		
adopted pursuant to NMSA 1978, Section 3-27-3, as amended - Written confirmation or verification from the municipality; Written approval obtained from the municipality				
Within 500 feet of a wetland.	Yes	No		
 US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site Within the area overlying a subsurface mine. 	Yes	□No		
- Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division				
Within an unstable area. - Engineering measures incorporated into the design: NM Bureau of Geology & Mineral Resources: USGS: NM Geological	Yes	No		
 Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map 				
Within a 100-year floodplain - FEMA map	Yes	No		

Form C-144 Oil Conservation Division Page 2 of 5

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15 17.9 NMAC Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15.17.9 Sting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC X Operating and Maintenance Plan - based upon the appropriate requirements of 19 15.17 12 NMAC				
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17 13 NMAC				
Previously Approved Design (attach copy of design) APIor Permit				
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15 17.9 NMAC Instructions Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9 Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15 17.10 NMAC Design Plan - based upon the appropriate requirements of 19.15.17 11 NMAC Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC Previously Approved Design (attach copy of design) API Previously Approved Operating and Maintenance Plan API				
Permanent Pits Permit Application Checklist: Subsection B of 19.15 17.9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (I) of Subsection B of 19.15.17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17 10 NMAC Climatological Factors Assessment Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC Dike Protection and Structural Integrity Design: based upon the appropriate requirements of 19.15.17.11 NMAC Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Treeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC Nuisance or Hazardous Odors, including H2S, Prevention Plan Emergency Response Plan Oil Field Waste Stream Characterization Monitoring and Inspection Plan Erosion Control Plan Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC				
14 Proposed Closure: 19.15.17.13 NMAC Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan. Type: XDrilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative				
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings) Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC				


16				
Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17 13.D NMAC) Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings—Use attachment if more than two facilities				
are required.	yy			
Disposal Facility Name. Dispo	osal Facility Permit #:			
Disposal Facility Name Dispo	osal Facility Permit #:			
Will any of the proposed closed-loop system operations and associated activities occur Yes (If yes, please provide the information No	r on or in areas that will not be used for future ser	rvice and operations?		
Required for impacted areas which will not be used for future service and operations Soil Backfill and Cover Design Specification - based upon the appropriate req Re-vegetation Plan - based upon the appropriate requirements of Subsection I Site Reclamation Plan - based upon the appropriate requirements of Subsection	of 19 15 17 13 NMAC			
17				
Siting Criteria (Regarding on-site closure methods only: 19.15 17.10 NMAC Instructions Each siting criteria requires a demonstration of compliance in the closure plan Recommendation string criteria may require administrative approval from the appropriate district office or may be for consideration of approval Justifications and/or demonstrations of equivalency are required. Plea	be considered an exception which must be submitted to the Si	anta Fe Environmental Bureau office		
Ground water is less than 50 feet below the bottom of the buried waste.		Yes X No		
- NM Office of the State Engineer - iWATERS database search, USGS: Data obtained fr	om nearby wells	∐N/A		
Ground water is between 50 and 100 feet below the bottom of the buried waste		Yes X No		
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from	om nearby wells	∐N/A		
Ground water is more than 100 feet below the bottom of the buried waste		X Yes No		
- NM Office of the State Engineer - 1WATERS database search; USGS; Data obtained from	om nearby wells	□N/A		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse (measured from the ordinary high-water mark)	Yes XNo			
- Topographic map, Visual inspection (certification) of the proposed site				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site; Aerial photo; satellite image		Yes XNo		
Yes XNo				
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at - NM Office of the State Engineer - iWATERS database; Visual inspection (certification)	the time of the initial application			
Within incorporated municipal boundaries or within a defined municipal fresh water well field pursuant to NMSA 1978, Section 3-27-3, as amended.		Yes X No		
 Written confirmation or verification from the municipality; Written approval obtained fi Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection 		Yes X No		
Within the area overlying a subsurface mine.	(certification) of the proposed site	Yes X No		
- Written confiramtion or verification or map from the NM EMNRD-Mining and Mineral	Division			
Within an unstable area.		Yes X No		
- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral F Topographic map	Resources; USGS; NM Geological Society,			
Within a 100-year floodplain FEMA map		Yes X No		
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must bee attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.				
X Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC				
X Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC				
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC				
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15 17 11 NMAC				
X Protocols and Procedures - based upon the appropriate requirements of 19.15.	17.13 NMAC			
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC				
X Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC				
X Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)				
X Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC				
· ·				
X Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC				

Form C-144 Oil Conservation Division

19 ~	
Operator Application	
• •	information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print):	Ethel Tally Title: Staff Regulatory Technician
Signature:	Ctill Jelly Date: 0/15/09
e-mail address:	ethel tally@conocophillips.com Telephone: 505-599-4027
20	
	Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)
OCD Representative S	Signature: 33 / Approval Date: 3-9-09
Title:	OCD Permit Number:
21	
	ired within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC
Instructions: Operators a	re required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure
	ubmitted to the division within 60 days of the completion of the closure activities Please do not complete this section of the form until an is been obtained and the closure activities have been completed.
пррточей стоянте рин на	· _
	Closure Completion Date:
22	
Closure Method:	
Waste Excavation	
If different from a	approved plan, please explain.
23	
	ing Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:
Instructions: Please iden were utilized.	tify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities
Disposal Facility Nam	ne: Disposal Facility Permit Number
Disposal Facility Nam	
	system operations and associated activities performed on or in areas that will not be used for future service and operations?
· · · · · · · · · · · · · · · · · · ·	e demonstrate complilane to the items below)
Required for impacted	d areas which will not be used for future service and operations
	(Photo Documentation)
Soil Backfilling a	and Cover Installation
Re-vegetation Ap	plication Rates and Seeding Technique
24	
	tachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in
the box, that the docu	e Notice (surface owner and division)
	Notice (required for on-site closure)
	n-site closures and temporary pits)
	ampling Analytical Results (if applicable)
	Sampling Analytical Results (if applicable)
l ≌ ' '	y Name and Permit Number
_ =	and Cover Installation Application Rates and Seeding Technique
=	r (Photo Documentation)
On-site Closure	
On-site Closule	Longitude. 1701 1701
25 Operator Closure Cer	rtification:
I hereby certify that the u	nformation and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that
the closure complies with	all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print):	Title:
Signature:	Date:
	Telephone

New Mexico Office of the State Engineer POD Reports and Downloads

Tow	nship: 27N	Range: 05W	Sections: 4,5	,6,7,8,9	,16,17,18	A 14 MAN A		
NAD27	X:	Y : ¹	Zone:		Search Ra	idius:		
County:	B a	sin:		Num	ber:	Suffix:		
Owner Name: (Fir	rst)	(Last)	0	Non-Dome	estic ODom	estic 💿	All
POD / Surfac	ce Data Rep	oort A	vg Depth to Water	Report	t to the think the same of the contract of the	Water Column	Report	<u>.</u>
		Clear Form	WATERS Me	enu .	Help			
			R COLUMN REPO	RT 02/	13/2009			
•	-	are 1=NW 2=NE are biggest t	•		Der	oth Depth	Water	(in
POD Number		Rng Sec q q q	Zone X		Y Wel		Column	
SJ 00046	27N (05W 04 4 4			5()6 260	246	

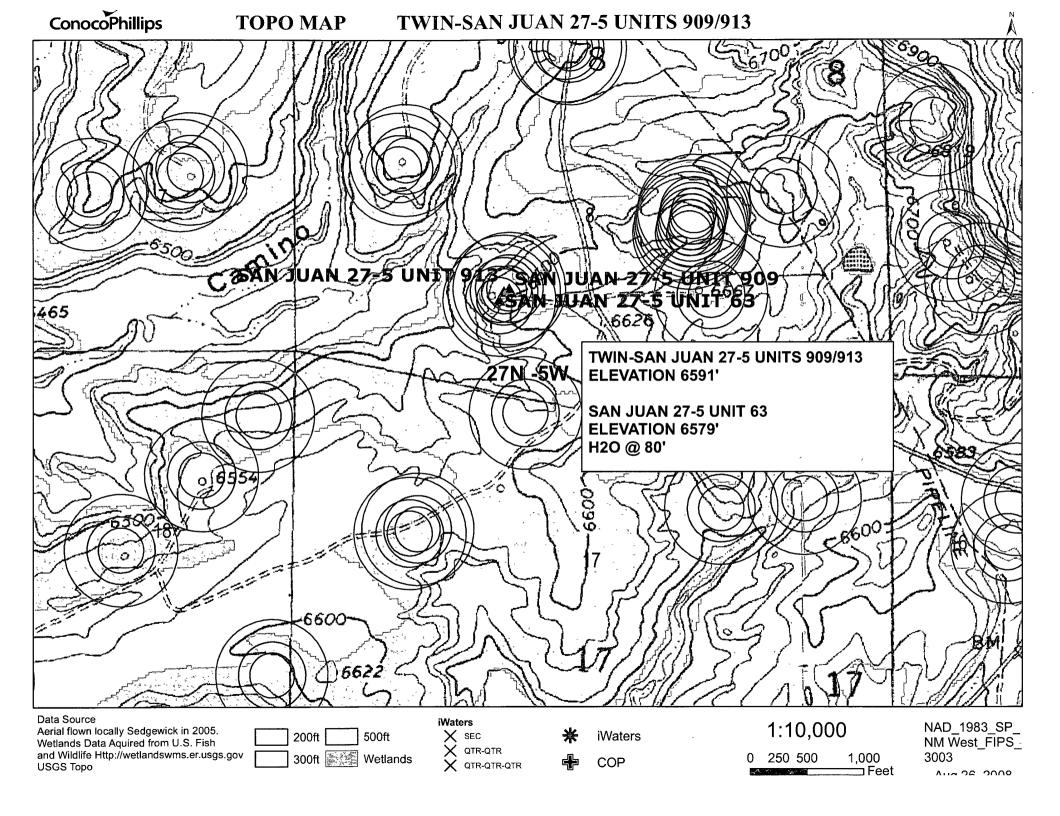

DATA SHEET FOR DEEP GROUND BED CATHODIC PROTECTION WELLS NORTHWESTERN NEW MEXICO (Submit 3 copies to OCD Aztec Office)

Operator MERIDIAN OIL Locati	ion: Unit_SN Sec. 8 Twp 27 Rng 5
Name of Well/Wells or Pipeline Serviced	SAN JUAN 27-5 UNIT #63
	cps 1698w
Elevation 6579 Completion Date 9/15/83 Total	l Depth 460' Land Type* N/A
Casing, Sizes, Types & Depths	N/A
If Casing is cemented, show amounts & types	s usedN/A
If Cement or Bentonite Plugs have been plac	ced, show depths & amounts used
Depths & thickness of water zones with desc Fresh, Clear, Salty, Sulphur, Etc. 80'-	-
Depths gas encountered: N/A	
Type & amount of coke breeze used:	5000 lbs.
Depths anodes placed: 415', 405', 395', 385', 33	30', 320', 295', 285', 275', 265'
Depths vent pipes placed: 460'	
Vent pipe perforations: 380'	,
Remarks: gb #1	

If any of the above data is unavailable, please indicate so. Copies of all logs, including Drillers Log, Water Analyses & Well Bore Schematics should be submitted when available. Unplugged abandoned wells are to be included.

^{*}Land Type may be shown: F-Federal; I-Indian; S-State; P-Fee. If Federal or Indian, add Lease Number.

ConocoPhillips **AERIAL MAP TWIN-SAN JUAN 27-5 UNITS 909/913**

Data Source
Aerial flown locally Sedgewick in 2005.
Wetlands Data Aquired from U S. Fish
and Wildlife Http://wetlandswms.er.usgs.gov
USGS Topo

200ft 500ft City Limits

1:10,000


1,000 NAD_1983_SP_ NM West_FIPS_ 3003

250 500

Aug 26, 2008


Mines, Mills and Quarries Web Map/San Juan 27-5 Unit 909/913

Mines, Mills & Quarries Commodity Groups **Aggregate & Stone Mines** Δ **Coal Mines Industrial Minerals Mines Industrial Minerals Mills Metal Mines and Mill Concentrate Potash Mines & Refineries** Smelters & Refinery Ops. **Uranium Mines Uranium Mills Population** Cities - major **Transportation** Railways

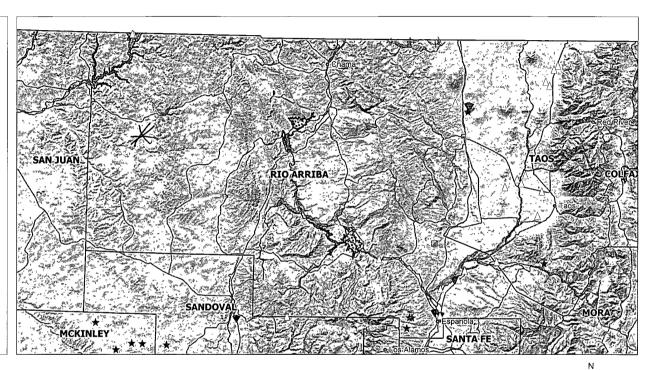





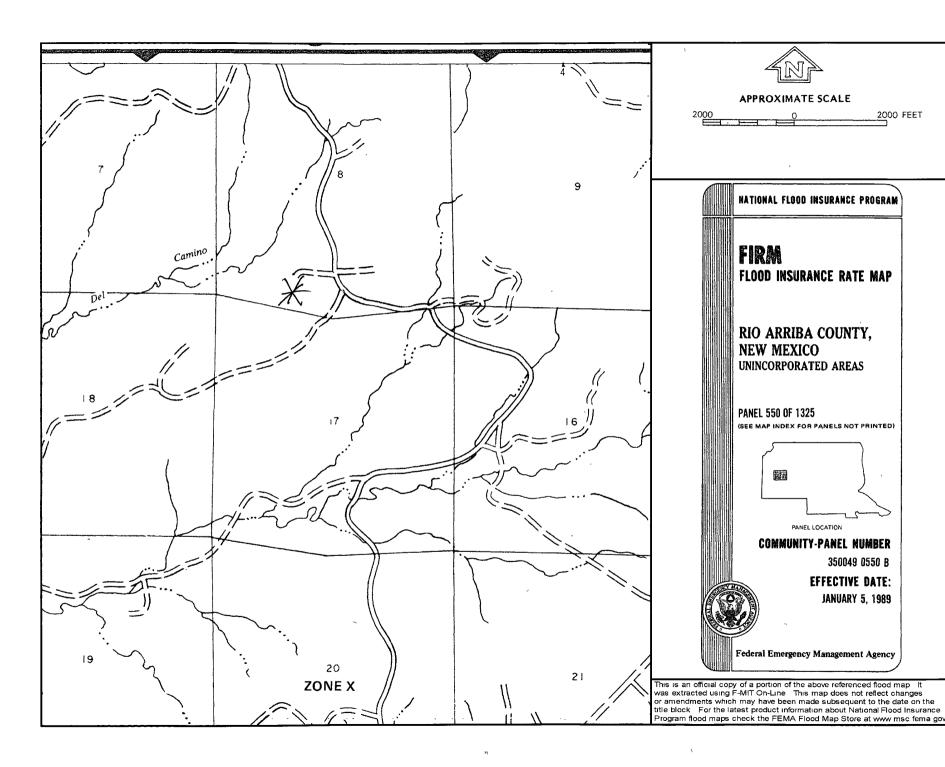

Siting Criteria Compliance Demonstration & Hydro Geologic Analysis

The San Juan 27-5 Units 909/913 are not located in an unstable area. The location is not over a mine and is not on the side of a hill as indicated on the Mines, Mills and Quarries Map and Topographic Map. The location of the excavated pit material will not be located within 300' of any continuously flowing watercourse or 200' from any other watercourse as indicated on the Topographic Map. The location is not within a 100-year floodplain area as indicated on the FEMA Map. The Cathodic well data from the San Juan 27-5 Unit 63 has an elevation of 6579' and groundwater depth of 80'. The subject well has an elevation of 6591' which is greater than the San Juan 27-5 Unit 63, therefore the groundwater depth is greater than 80'. There is an iWATERS data point located in the area as indicated on the report. The hydro geologic analysis indicates the groundwater depth and the San Jose formation will create a stable area for this new location.

Hydrogeological report for San Juan 27-5 Units 909/913

Regional Hydrogeological context:

The San Jose Formation of Eocene age occurs in New Mexico and Colorado, and its outcrop forms the land surface over much of the eastern half of the central basin. It overlies the Nacimiento Formation in the area generally south of the Colorado-New Mexico State line and overlies the Animas Formation in the area generally north of the State line.

The San Jose Formation was deposited in various fluvial-type environments. In general, the unit consists of an interbedded sequence of sandstone, siltstone, and variegated shale. Thickness of the San Jose Formation generally increases from west to east (200 feet in the west and south to almost 2,700 feet in the center of the structural basin). Ground water is associated with alluvial and fluvial sandstone aquifers. Thus, the occurrence of ground water is mainly controlled by the distribution of sandstone in the formation. The distribution of such sandstone is the result of original depositional extent plus any post-depositional modifications, namely erosion and structural deformation. Transmissivity data for San Jose Formation are minimal. Values of 40 and 120 feet squared per day were determined from two aquifer tests (Stone et al, 1983, table 5). The reported or measured discharge from 46 water wells completed in San Jose Formation ranges from 0.15 to 61 gallons per minute and the median is 5 gallons per minute. Most of the wells provide water for livestock and domestic use.

The San Jose Formation is a very suitable unit for recharge from precipitation because soils that form on the unit are sandy and highly permeable and therefore readily adsorb precipitation. However, low annual precipitation, relatively high transpiration and evaporation rates, and deep dissection of the San Jose Formation by the San Juan River and its tributaries all tend to reduce the effective recharge to the unit.

Stone et al., 1983, Hydrogeology and Water Resources of the San Juan Basin, New Mexico: Socorro, New Mexico Bureau of Mines and Mineral Resources Hydrologic Report 6, 70 p.



ConocoPhillips Company GRFS / PTRRC – San Juan Business Unit Juanita Farrell 3401 East 30th Street Farmington, NM 87402

Telephone: (505) 326-9597 Facsimile: (505) 324-6136

July 30, 2008

VIA CERTIFIED MAIL – RETURN RECEIPT REQUESTED

7110-6605-9590-0026-0418

Nick Candelaria 511 East Broadway Farmington, NM 87401

Subject:

Rio Arriba County, New Mexico

<u>Well Name</u>	<u>Location</u>
San Juan 27-5 Unit 901	NW Section 8, T27N, R5W
San Juan 27-5 Unit 902	NW Section 8, T27N, R5W
San Juan 27-5 Unit 904	NW Section 8, T27N, R5W
San Juan 27-5 Unit 905	NW Section 8, T27N, R5W
San Juan 27-5 Unit 908	SW Section 8, T27N, R5W
San Juan 27-5 Unit 909	SW Section 8, T27N, R5W
San Juan 27-5 Unit 910	SE Section 8, T27N, R5W
San Juan 27-5 Unit 911	SE Section 8, T27N, R5W
San Juan 27-5 Unit 912	SE Section 8, T27N, R5W
San Juan 27-5 Unit 913	SW Section 8, T27N, R5W
San Juan 27-5 Unit 914	SE Section 8, T27N, R5W
San Juan 27-5 Unit 915	SE Section 8, T27N, R5W
San Juan 27-5 Unit POW 916	SW Section 8, T27N, R5W

Dear Landowner:

Pursuant to Paragraph 1 (b) of Subsection F of 19.15.17.13 NMAC, an operator shall provide the surface owner of the operator's proposal to close a temporary pit on-site in compliance with the on-site closure methods specified in the same Subsection of the NMAC. In compliance of this requirement, please consider this notification of ConocoPhillips' intent to close the temporary pit on the above referenced location.

If you have any questions, please contact Mark Stallsmith @ (505)324-6172.

Sincerely,

Juanita Farrell

Juanita Farrell Staff Associate, PTRRC DISTRICT I 1625 N. French Dr., Hobbs, N.M. 88240 DISTRICT II State of New Mexico Energy, Minerals & Natural Resources Department

Revised October 12, 2005 Submit to Appropriate District Office

1301 W. Grand Avenue, Artesia, N.M. 88210 DISTRICT III 1000 Rio Brazos Rd., Aztec, N.M. 87410 DISTRICT IV

1220 S. St. Francis Dr., Santa Fe, N.M. 87505

State Lease - 4 Copies

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, N.M. 87505

Fee Lease - 3 Copies

□ AMENDED REPORT

Form C-102

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number	Pool Code	Pool Name	
⁴ Property Code		perty Name NN 27-5 UNIT	Well Number 913
OGRID No.	Operator Name BURLINGTON RESOURCES OIL & GAS COMPANY LP.		Elevation 6591

¹⁰ Surface Location North/South line UL or lot no. Section Township Range Lot Idn Feet from the Feet from the East/West line County 1846 **WEST** RIO ARRIBA 8 27 N 5 W 853 SOUTH Ν ¹¹Bottom Hole Location If Different From Surface UL or lot no. Lot Idn Feet from the Section Township North/South line Feet from the East/West line Range County 1135 1605 RIO ARRIBA 8 27 N 5 W WEST N SOUTH Dedicated Acres is Joint or Infill ²⁴ Consolidation Code 18 Order No. 320

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

			DAKD UNII HAS BEEN		
16	S 88°47'03" E			5208.18'	17 OPERATOR CERTIFICATION I hereby certify that the information contained herein to
2646.33'			O = SURFACE LOCA ● = BOTTOM HOLE	Ç.	In nevery certify that the information contained never to true and complete to the best of my knowledge and belief, and that this organisation either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretafore entered by the division.
}	USA SF	079391			
0°23'21"				<u>.</u>	Signature Date
o z				25.5	Printed Name
_				S	
L		SECT	UN 8		
		NAD 831			18 SURVEYOR CERTIFICATION
Ö	LAT: 36.58				I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me
16	LONG: 107.38		<u> </u>	ကို	or under my supervision, and that the same is true and
2616.10		NAD 27	Į	O O	correct to the best of my belief.
12	LAT: 36° 35			ő	
1	LONG: 107° 23.			•	
,		/		,	Date of Survey Signature and Seal of Professional Survey
	1605'		NAD 83		Signature and Seal & Professional Surveyor
		Ţ	LAT: 36.582983° N	Ψ	15/5/70/5/
<u> </u>	1846'		LONG: 107.384567° V	, t	17078 E
0°35.07	į		NAD 27	•	
io		1135	LAT: 36° 34.9784' N	121	Shand with
li.		85.5	LONG: 107° 23.0379'	w s	12070
z	ĺ	ا		-	11018 CESSIONA
	N 78°52'24" W	2690.161	S 83°29'20" W	2670.27	Certificate Number


BURLINGTON RESOURCES OIL & GAS COMPANY LP.

SAN JUAN 27-5 UNIT 913 - 853' FSL \$ 1846' FWL (SURFACE)

I I 35' FSL & I 605' FWL (BOTTOM)

SECTION 8, T-27-N, R-5-W, N.M.P.M., RIO ARRIBA COUNTY, N.M.

GROUND ELEVATION: 6591 - DATE: JUNE 7, 2007

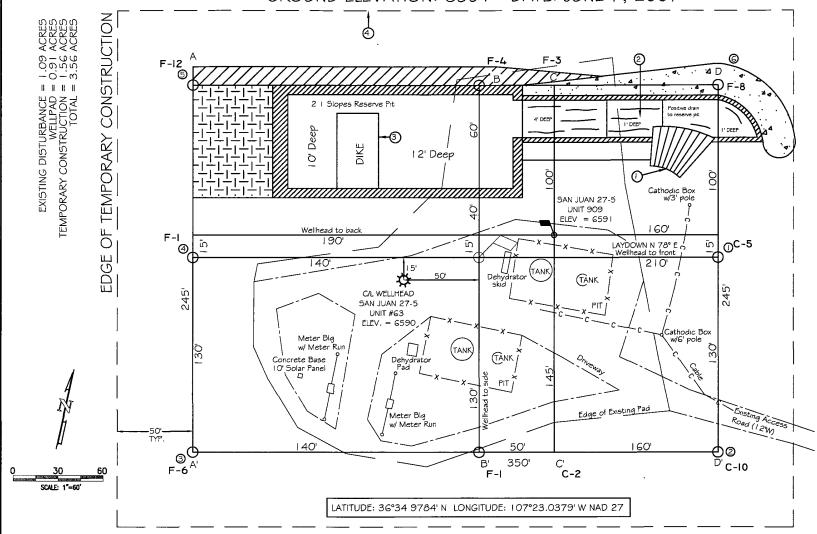

PAD CONST SPECS.

- I RAMP INTO PIT CONSTRUCTED FROM PAD GRADE INTO FLARE AREA AT 5% SLOPE
- 2 APPROXIMATE 13'x75' PIT AREA LINED WITH 12 MIL POLYLINER:
- 3 RESERVE PIT DIKE TO BE 8' ABOVE DEEP SIDE (OVERFLOW 3' WIDE AND 1' ABOVE SHALLOW SIDE)
- 4. EDGE OF TEMPORARY CONSTRUCTION DEFINED IN FIELD W/G' T-POST


NOTES:

- CONTRACTOR SHOULD CALL "ONE-CALL" FOR LOCATION OF ANY MARKED
 OR UNMARKED BURIED PIPELINES OR CABLES ON WELLPAD AND OR
 ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONST
- 2.) UNITED FIELD SERVICES, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.

SURVEYED: 6/07/07	REV. DATE:	APP. BY M.W.L.
DDAWN BY: U.S.	DATE DRAWN, 6/13/07	EUE NAME: 7703101



BURLINGTON RESOURCES OIL & GAS COMPANY LP. SAN JUAN 27-5 UNIT 913 - 853' FSL & 1846' FWL (SURFACE) 1135' FSL & 1605' FWL (BOTTOM) SECTION 8, T-27-N, R-5-W, N.M.P.M., RIO ARRIBA COUNTY, N.M. GROUND ELEVATION: 6591- DATE: JUNE 7, 2007

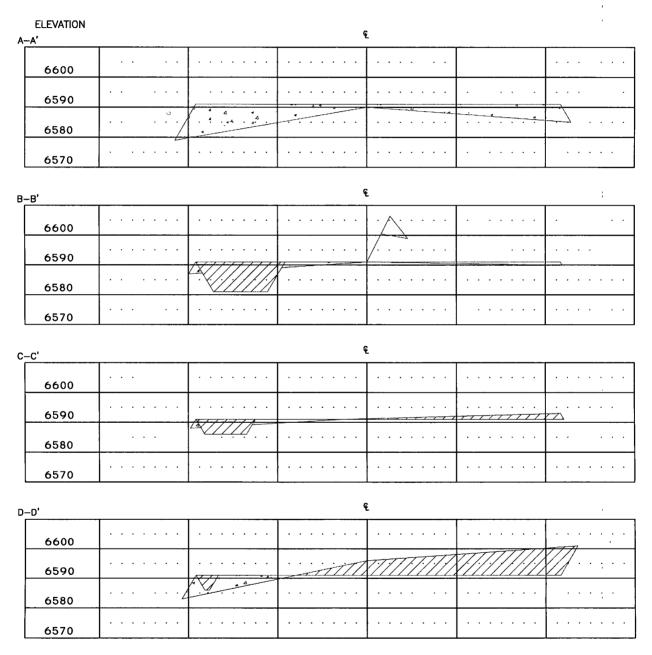

I'' = 60' - HORIZ.I'' = 30' - VERT.

NOTES:

- I.) CONTRACTOR SHOULD CALL "ONE-CALL" FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELLPAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONST.
- 2.) UNITED FIELD SERVICES, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.

SURVEYED: 6/07/07	REV. DATE:	APP, BY M.W.L.
DRAWN BY: H.S.	DATE DRAWN: 6/12/07	FILE NAME: 7703C01



DISTRICT I 1625 N. French Dr., Hobbs, N.M. 88240 DISTRICT II

DISTRICT II
1301 W. Grand Avenue, Artesia, N.M. 88210
DISTRICT III

1000 Rio Brazos Rd., Aztec, N.M. 87410 DISTRICT IV 1220 S. St. Francis Dr., Santa Fe, N.M. 87505 State of New Mexico Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION 1220 South St. Francis Dr. Santa Fe, N.M. 87505 Form C-102 Revised October 12, 2005

Submit to Appropriate District Office

State Lease - 4 Copies Fee Lease - 3 Copies

□ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT									
¹ API Number ^{.3} Pool Code					Pool Name				
Property Code SAN JUAN 27-5 UNIT					Well Number · 913				
OGRID No.			ON RES	*Operator Name				Elevation 6591	
L	BURLINGTON RESOURCES OIL & GAS COMPANY LP. 6591 10 Surface Location				,				
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West	line County
N	8	27 N	5 W		853	SOUTH	1846	WEST	RIO ARRIBA
			11 Botto	m Hole		If Different Fro			
UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West	line County
N	8	27 N	5 W		1135	SOUTH	1605	WEST	RIO ARRIBA
Dedicated Acre 320	s Joint	or Infill 14	Consolidation	Code 150	rder No.				
NO ALLOW	ABLE W					ON UNTIL ALL EEN APPROVED			EN CONSOLIDATED
16 S 88°47	'03" E					5208.181			CERTIFICATION
2646.33					SURFACE LO	OCATION LE LOCATION	true and comp and that this or unleased m proposed botton well at this lo owner of such voluntary pools	lete to the best organisation eti ineral interest i in hole location cation pursuant a mineral or u	mation contained herein is of my knowledge and belief, her owns a working interest in the land including the or has a right to drill this to a contract with an working interest, or to a r a compulsory pooling order vion.
N 0°23'2 " W	SA SF	-079391	SEC1	FION 8			Signature Signature Printed Nam O	ne	Date
LONG LAT:	: 107.38 36° 35 107° 23.	NAD 83 35908° N 5595° W NAD 27 .0340' N .0876' W					I hereby certified was plotted from the correct to	y that the well m field notes of upervision, and best of my belia	CERTIFICATION location shown on this plat of actual surveys made by me that the same to true and f. SHALL W. SHALL W. SHOUND BURNEY.
N 78°52'	846'	1135	2690.16	NAD LAT: LONG	36.582983° 3: 107.38456	7° W	U 20.1Z of Certificate N	GENS OF	17078 E 17078 E OFESSIONAL


BURLINGTON RESOURCES OIL & GAS COMPANY LP.

SAN JUAN 27-5 UNIT 913 - 853' FSL \$ 1846' FWL (SURFACE)

I 135' FSL # 1605' FWL (BOTTOM)

SECTION 8, T-27-N, R-5-W, N.M.P.M., RIO ARRIBA COUNTY, N.M.

GROUND ELEVATION: 6591 - DATE: JUNE 7, 2007

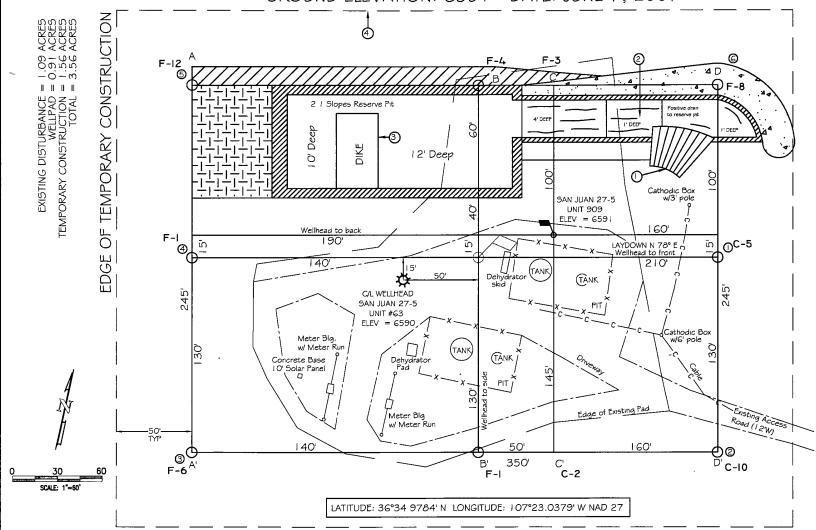

PAD CONST. SPECS

- I RAMP INTO PIT CONSTRUCTED FROM PAD GRADE INTO FLARE AREA AT 5% SLOPE
- 2 APPROXIMATE 13'x75' PIT AREA LINED WITH 12 MIL POLYLINER
- 3 RESERVE PIT DIKE TO BE 8' ABOVE DEEP SIDE (OVERFLOW 3' WIDE AND I' ABOVE SHALLOW SIDE)
- 4 EDGE OF TEMPORARY CONSTRUCTION DEFINED IN FIELD W/G' T-POST

NOTES:


- CONTRACTOR SHOULD CALL "ONE-CALL" FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELLPAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONST.
- 2.) UNITED FIELD SERVICES, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.

SURVEYED: 6/07/07	REV. DATE:	APP. BY M.W.L.
DRAWN BY: H.S.	DATE DRAWN: 6/13/07	FILE NAME: 7703L01



BURLINGTON RESOURCES OIL & GAS COMPANY LP. SAN JUAN 27-5 UNIT 913 - 853' FSL & 1846' FWL (SURFACE) 1135' FSL & 1605' FWL (BOTTOM)

SECTION 8, T-27-N, R-5-W, N.M.P.M., RIO ARRIBA COUNTY, N.M. GROUND ELEVATION: 6591-DATE: JUNE 7, 2007

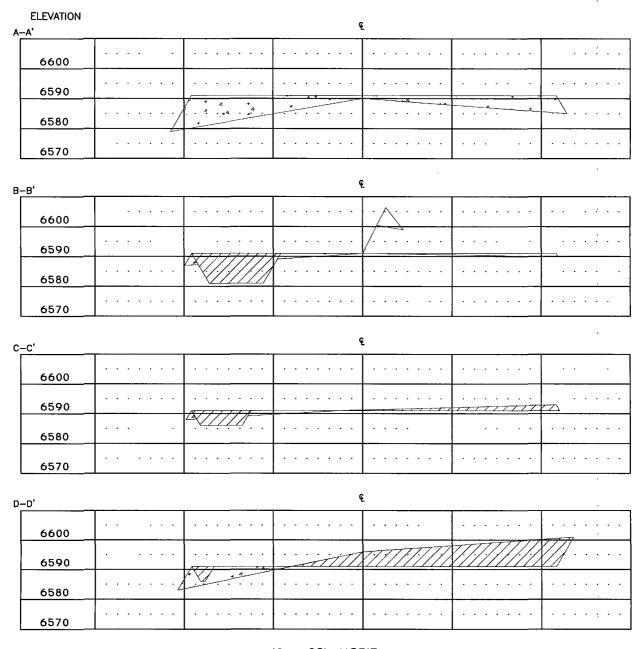

I'' = 60' - HORIZ.I'' = 30' - VERT.

NOTES:

1.) CONTRACTOR SHOULD CALL "ONE-CALL" FOR LOCATION OF ANY MARKED OR UNMARKED BURIED PIPELINES OR CABLES ON WELLPAD AND OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR TO CONST.

2.) UNITED FIELD SERVICES, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.

SURVEYED: 6/07/07	REV. DATE:	APP. BY M.W.L.
DRAWN BY: H.S.	DATE DRAWN: 6/12/07	FILE NAME: 7703C01



Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Plan

In accordance with Rule 19.15.17.12 NMAC the following information describes the closure requirements of temporary pits on Burlington Resources Oil & Gas Company, LP (BR) locations. This is BR's standard procedure for all temporary pits. A separate plan will be submitted for any temporary pit which does not conform to this plan.

All closure activities will include proper documentation and be available for review upon request and will be submitted to OCD within 60 days of closure of pit closure. Closure report will be filed on C-144 and incorporate the following:

- Details on Capping and Covering, where applicable.
- Plot Plan (Pit Diagram)
- Inspection Reports
- Sampling Results
- C-105
- Copy of Deed Notice will be filed with County Clerk

General Plan:

- All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division-approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves. The facilities to be used will be Basin Disposal (Permit #NM-01-005) and Envirotech Land Farm (Permit #NM-01-011)
- 2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.
- 3. The surface owner shall be notified of BR's closing of the temporary pit prior to closure as per the approved closure plan via certified mail, return receipt requested.
- 4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.
- 5. Notice of Closure will be given prior to the Aztec Division office between 72 hours and one week via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.
- 6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at the San Juan County Landfill located on CR 3100.
- 7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.
- 8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX .	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300.1	1000(500)

9. A five point composite sample will be taken from the cavitation pit pursuant to 19.15.17.13(B)(1)(b)(i) in order to assure there has not been any type of release.

Components	Tests Method	Limit (mg/Kg)
Benzene	EPA SW-846 8021B or 8260B	0.2
BTEX	EPA SW-846 8021B or 8260B	50
TPH	EPA SW-846 418.1	2500
GRO/DRO	EPA SW-846 8015M	500
Chlorides	EPA 300.1	500

- 10. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.
- 11. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.
- 12. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011
- 13. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final re-contour shall have a uniform appearance with smooth surface, fitting the natural landscape.
- 14. Notification will be sent to OCD when the reclaimed area is seeded.
- 15. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Туре	Variety or Cultivator	PLS/A
Western wheatgrass	Arriba	3.0
Indian ricegrass	Paloma or Rimrock	3.0
Slender wheatgrass	San Luis	2.0
Crested wheatgrass	Hy-crest	3.0
Bottlebrush Squirreltail	Unknown	2.0
Four-wing Saltbrush	Delar	.25

Species shall be planted in pounds of pure live seed per acre: Present Pure Live Seed (PLS) = Purity X Germination/100

Two lots of seed can be compared on the basis of PLS as follows: Source No. One (poor quality) Source No. two (better quality)

Purity 50 percent 80 percent Purity Germination 40 percent 63 percent Germination Percent PLS 20 percent Percent PLS 50 percent

5 lb. bulk seed required to make 2 lb. bulk seed required to make

1 lb. PLS 1 lb. PLS 16. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.