

District I
1625 N French Dr., Hobbs, NM 88240

District II
1301 W. Grand Avenue, Artesia, NM 88210

District III
1000 Rio Brazos Rd., Aztec, NM 87410

District IV
1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals & Natural Resources Department

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised October 12, 2005
Instructions on back
Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies

"As Drilled"
☒ AMENDED REPORT
RCVD MAR 19 '09

WELL LOCATION AND ACREAGE DEDICATION PLAT
OIL CONS. DIV.
DIST. 3

*API Number 30-039-30181	*Pool Code 72319 / 71599	*Pool Name BLANCO MESAVERDE / BASIN DAKOTA
*Property Code 17033	*Property Name ROSA UNIT	*Well Number 6C
*GRID No. 120782	*Operator Name WILLIAMS PRODUCTION COMPANY	*Elevation 6782'

¹⁰ Surface Location

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	27	31N	5W		755	SOUTH	880	WEST	RIO ARriba

¹¹ Bottom Hole Location If Different From Surface

UL or lot no	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
K	27	31N	5W		1714	SOUTH	2424	WEST	RIO ARriba
¹² Dedicated Acres 320.0 Acres - (S/2)					¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No		

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

15	5278.68'	¹⁷ OPERATOR CERTIFICATION I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom-hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or to a voluntary pooling agreement or a compulsory pooling order heretofore entered by the division. <i>Larry Higgins</i> 3-18-09 Signature Date <i>Larry Higgins</i> Printed Name
SURFACE LOCATION LAT: 36° 86' 54.2" N LONG: 107° 35' 56.5" W DATUM: NAD83 BOTTOM-HOLE LOCATION LAT: 36° 86' 50.7" N LONG: 107° 35' 03.6" W DATUM: NAD83 LAT: 36° 51' 52.49" N LONG: 107° 21' 30.26" W DATUM: NAD27 LAT: 36° 52' 08.35" N LONG: 107° 20' 98.54" W DATUM: NAD27	27 2424' 1714' 880' 755' 1821.7' N57°48.8'E 5277.36' 5280.00' 5280.00' LEASE SF-078770	¹⁸ SURVEYOR CERTIFICATION I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief. Date Revised: OCTOBER 16, 2008 Date of Survey: MAY 4, 2006 Signature and Seal of Professional Surveyor <i>Jason C. Edwards</i> 15269 REGISTERED PROFESSIONAL SURVEYOR NEW MEXICO JASON C. EDWARDS Certificate Number 15269


30-039-30181



ROSA UNIT #6C
RIO ARRIBA CO., NEW MEXICO

LEGEND

- #6C, 1, Plan #2
— 1
— WFT SVY

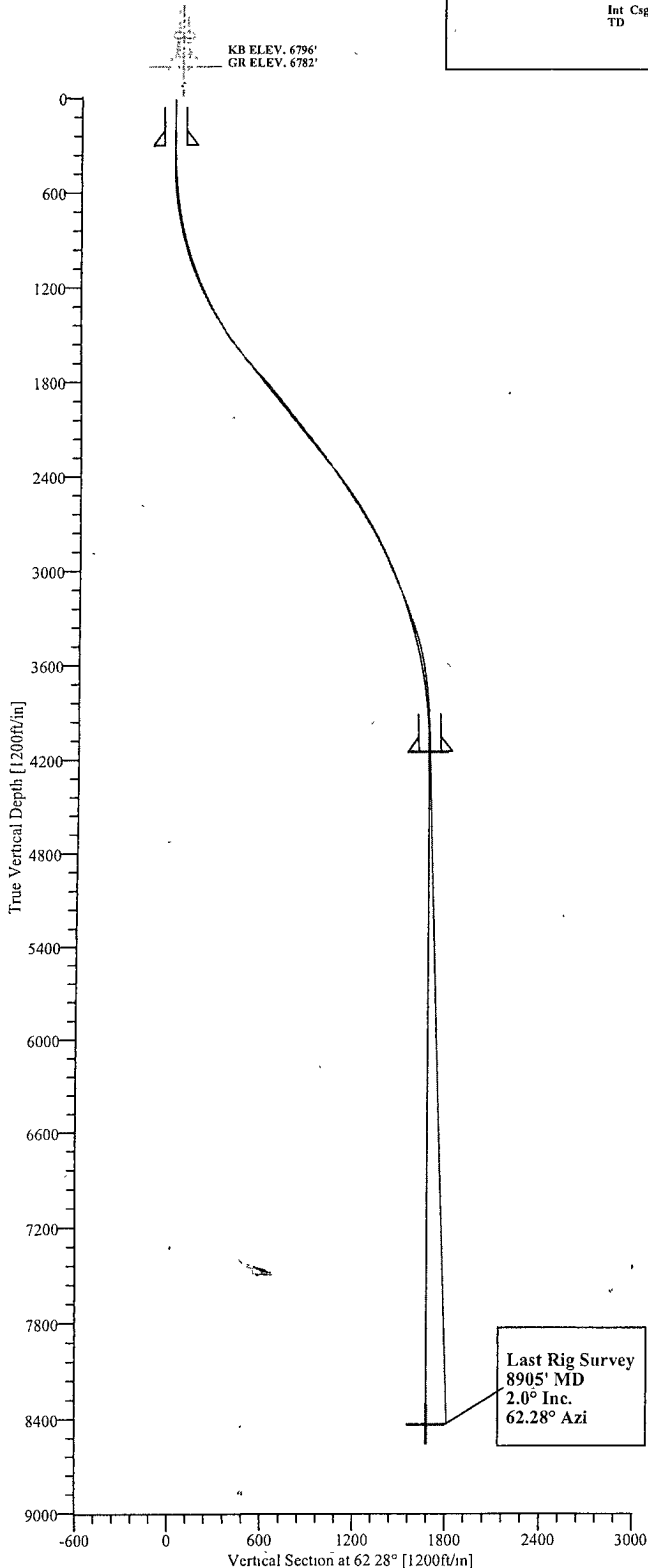

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N/-S	+E/-W	DLeg	TFace	VSec	Target
1	0.00	0.00	57.74	-6796.00	0.00	0.00	0.00	0.00	0.00	
2	400.00	0.00	57.74	-6396.00	0.00	0.00	0.00	0.00	0.00	
3	1725.68	39.77	57.74	-5174.24	235.88	373.70	3.00	57.74	441.92	
4	2631.98	39.77	57.74	-4477.65	545.34	863.97	0.00	0.00	1021.69	
5	4620.50	0.00	57.74	-2645.00	899.16	1424.52	2.00	180.00	1684.56	Int Csg Pt
6	8905.50	0.00	57.74	1640.00	899.16	1424.52	0.00	57.74	1684.56	TD



WELL DETAILS

Name	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Slot
#6C	0.00	0.00	2136177.82	1316995.36	36°51'55.510N	107°21'20.300W	N/A

TARGET DETAILS

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude	Shape
Int Csg Pt	4151.00	899.16	1424.52	2137060.42	1318430.20	36°52'04.400N	107°21'02.770W	Point
TD	8436.00	899.16	1424.52	2137060.42	1318430.20	36°52'04.400N	107°21'02.770W	Point

RCVD NOV 4 '08
OIL CONS. DIV.
DIST. 3

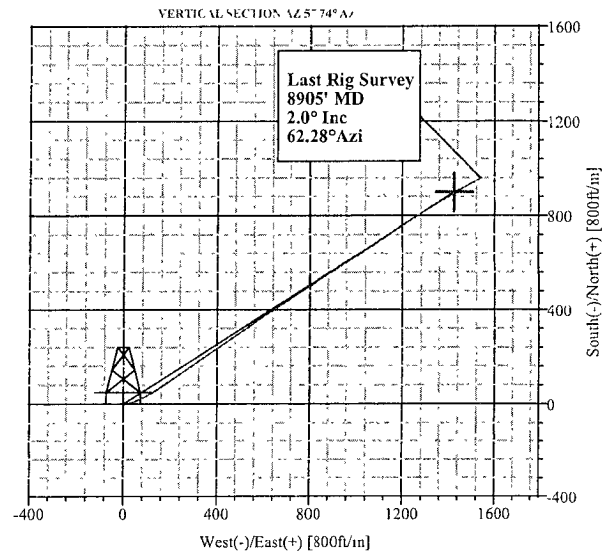

Weatherford®

Survey: WFT SVY (#6C/1)

Created By Jayme Wilson

Date 10/9/2008



Weatherford International Ltd.

SURVEY REPORT



Weatherford

Company: WILLIAMS PRODUCTION	Date: 10/9/2008	Time: 13:41:15	Page: 1
Field: Rio Arriba Co., NM (NAD 83)	Co-ordinate(NE) Reference: Well #6C, True North		
Site: Rosa Unit #6C	Vertical (TVD) Reference: SITE 6796.0		
Well: #6C	Section (VS) Reference: Well (0.00N;0.00E;62.28Azi)		
Wellpath: 1	Survey Calculation Method: Minimum Curvature	Db: Sybase	

Survey: WFT SVY	Start Date: 9/17/2008
Company: Weatherford International, Inc	Engineer: Lindsey Maddux
Tool: MWD;MWD - Standard	Tied-to: From Surface

Field:	Rio Arriba Co., NM (NAD 83)		
Map System:	US State Plane Coordinate System 1983	Map Zone:	New Mexico, Central Zone
Geo Datum:	GRS 1980	Coordinate System:	Well Centre
Sys Datum:	Mean Sea Level	Geomagnetic Model:	bggm2007

Site: Rosa Unit #6C
755' FSL 880' FEL of SEC 27, T-31-N, R-5-W
Site Position: Northing: 2136177.82 ft Latitude: 36 51 55 510 N
From: Geographic Easting: 1316995.36 ft Longitude: 107 21 20.300 W
Position Uncertainty: 0.00 ft North Reference: True
Ground Level: 6782.00 ft Grid Convergence: -0.66 deg

Well: #6C				Slot Name:					
Well Position:		+N/-S	0.00 ft	Northing:		2136177.82 ft	Latitude:		36 51 55 510 N
		+E/-W	0.00 ft	Easting :		1316995.36 ft	Longitude:		107 21 20.300 W
Position Uncertainty:			0.00 ft						

Wellpath: 1	Drilled From: Surface
Current Datum: SITE	Tie-on Depth: 0.00 ft
Magnetic Data: 8/14/2008	Above System Datum: Mean Sea Level
Field Strength: 51190 nT	Declination: 10.15 deg
Vertical Section: Depth From (TVD)	Mag Dip Angle: 63.73 deg
ft	+N/-S
	+E/-W
	Direction
	deg
0.00	0.00
0.00	0.00
0.00	62.28

Survey

MD	Incl	Azim	TVD	N/S	E/W	VS	DLS	Build	Turn	Comment
ft	deg	deg	ft	ft	ft	ft	deg/100ft	deg/100ft	deg/100ft	
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
348.00	1.31	106.65	347.97	-1.14	3.81	2.84	0.38	0.38	0.00	
379.00	1.75	103.53	378.96	-1.35	4.61	3.45	1.44	1.42	-10.06	
409.00	2.44	90.90	408.94	-1.47	5.69	4.36	2.75	2.30	-42.10	
440.00	3.25	83.03	439.90	-1.37	7.23	5.76	2.89	2.61	-25.39	
471.00	3.81	79.40	470.84	-1.08	9.11	7.56	1.94	1.81	-11.71	
502.00	4.63	76.28	501.76	-0.59	11.34	9.76	2.75	2.65	-10.06	
533.00	5.19	76.03	532.64	0.04	13.92	12.34	1.81	1.81	-0.81	
564.00	6.00	75.53	563.50	0.79	16.85	15.28	2.62	2.61	-1.61	
595.00	6.38	74.78	594.31	1.64	20.08	18.54	1.25	1.23	-2.42	
626.00	7.25	72.40	625.10	2.69	23.60	22.14	2.95	2.81	-7.68	
656.00	7.88	74.65	654.83	3.81	27.39	26.02	2.32	2.10	7.50	
687.00	8.88	74.15	685.50	5.02	31.74	30.43	3.23	3.23	-1.61	
718.00	9.69	72.28	716.10	6.47	36.53	35.34	2.79	2.61	-6.03	
749.00	10.69	71.65	746.61	8.17	41.74	40.75	3.25	3.23	-2.03	
780.00	11.50	70.15	777.03	10.12	47.38	46.65	2.77	2.61	-4.84	
811.00	12.44	69.53	807.35	12.34	53.41	53.02	3.06	3.03	-2.00	
841.00	13.50	67.03	836.59	14.84	59.66	59.72	4.00	3.53	-8.33	
872.00	14.25	66.53	866.68	17.77	66.50	67.13	2.45	2.42	-1.61	
904.00	14.81	65.15	897.66	21.06	73.82	75.14	2.06	1.75	-4.31	
934.00	15.75	63.78	926.60	24.47	80.95	83.04	3.36	3.13	-4.57	
965.00	16.88	62.03	956.35	28.44	88.70	91.75	3.97	3.65	-5.65	
996.00	17.63	61.53	985.95	32.78	96.80	100.94	2.47	2.42	-1.61	
1028.00	18.38	60.15	1016.39	37.61	105.44	110.83	2.70	2.34	-4.31	



Weatherford International Ltd.

SURVEY REPORT

**Weatherford**

Company:	WILLIAMS PRODUCTION	Date:	10/9/2008	Time:	13:41:15	Page:	2
Field:	Rio Arriba Co., NM (NAD 83)	Co-ordinate(NE) Reference:	Well: #6C, True North				
Site:	Rosa Unit #6C	Vertical (TVD) Reference:	SITE 6796.0				
Well:	#6C	Section (VS) Reference:	Well (0.00N, 0.00E, 62.28Azi)				
Wellpath:	1	Survey Calculation Method:	Minimum Curvature			Db:	Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Comment
1059.00	19.69	59.65	1045.69	42.68	114.19	120.93	4.26	4.23	-1.61	
1091.00	20.75	58.78	1075.72	48.34	123.69	131.98	3.44	3.31	-2.72	
1122.00	21.75	57.65	1104.61	54.26	133.23	143.18	3.49	3.23	-3.65	
1153.00	22.13	56.90	1133.37	60.52	142.98	154.72	1.52	1.23	-2.42	
1183.00	22.88	56.78	1161.08	66.80	152.59	166.15	2.50	2.50	-0.40	
1214.00	23.75	56.28	1189.55	73.57	162.82	178.36	2.88	2.81	-1.61	
1245.00	24.50	56.40	1217.84	80.59	173.37	190.96	2.42	2.42	0.39	
1277.00	25.06	56.58	1246.90	88.00	184.55	204.30	1.77	1.75	0.56	
1308.00	26.06	55.58	1274.86	95.46	195.65	217.60	3.51	3.23	-3.23	
1338.00	27.31	55.95	1301.67	103.04	206.79	230.99	4.20	4.17	1.23	
1369.00	27.94	55.70	1329.13	111.12	218.68	245.27	2.07	2.03	-0.81	
1401.00	28.69	55.20	1357.30	119.72	231.18	260.34	2.46	2.34	-1.56	
1433.00	29.94	54.70	1385.20	128.72	244.01	275.88	3.98	3.91	-1.56	
1464.00	31.44	55.03	1411.86	137.83	256.95	291.57	4.87	4.84	1.06	
1496.00	32.88	55.90	1438.95	147.48	270.98	308.48	4.73	4.50	2.72	
1527.00	33.81	56.28	1464.85	156.99	285.12	325.42	3.07	3.00	1.23	
1559.00	34.56	56.15	1491.32	166.98	300.06	343.30	2.35	2.34	-0.41	
1591.00	35.38	55.53	1517.54	177.28	315.24	361.52	2.79	2.56	-1.94	
1621.00	36.38	56.15	1541.85	187.16	329.79	379.00	3.55	3.33	2.07	
1653.00	37.13	56.03	1567.49	197.84	345.68	398.03	2.35	2.34	-0.37	
1685.00	38.25	56.40	1592.81	208.72	361.94	417.49	3.57	3.50	1.16	
1715.00	39.00	56.90	1616.25	219.01	377.58	436.12	2.71	2.50	1.67	
1746.00	40.50	56.65	1640.08	229.87	394.17	455.85	4.87	4.84	-0.81	
1777.00	41.38	56.15	1663.50	241.11	411.08	476.06	3.03	2.84	-1.61	
1809.00	41.81	55.65	1687.43	253.02	428.67	497.17	1.70	1.34	-1.56	
1840.00	42.38	55.78	1710.43	264.73	445.85	517.82	1.86	1.84	0.42	
1871.00	42.25	55.77	1733.35	276.47	463.10	538.55	0.42	-0.42	-0.03	
1903.00	42.44	55.90	1757.00	288.57	480.94	559.97	0.65	0.59	0.41	
1935.00	43.44	56.15	1780.43	300.75	499.01	581.64	3.17	3.12	0.78	
1966.00	42.69	55.53	1803.08	312.64	516.53	602.67	2.78	-2.42	-2.00	
1997.00	42.31	55.53	1825.93	324.49	533.80	623.47	1.23	-1.23	0.00	
2027.00	42.06	55.53	1848.16	335.89	550.40	643.48	0.83	-0.83	0.00	
2059.00	40.88	55.78	1872.14	347.85	567.90	664.53	3.72	-3.69	0.78	
2091.00	39.88	55.65	1896.52	359.53	585.03	685.12	3.14	-3.12	-0.41	
2121.00	39.94	56.03	1919.53	370.34	600.96	704.25	0.84	0.20	1.27	
2153.00	38.63	56.23	1944.30	381.63	617.78	724.39	4.11	-4.09	0.62	
2185.00	38.75	56.28	1969.27	392.74	634.41	744.29	0.39	0.37	0.16	
2216.00	38.75	56.90	1993.45	403.42	650.61	763.59	1.25	0.00	2.00	
2248.00	38.69	57.40	2018.42	414.28	667.42	783.53	1.00	-0.19	1.56	
2279.00	38.63	57.53	2042.62	424.70	683.75	802.83	0.33	-0.19	0.42	
2311.00	38.75	57.40	2067.60	435.46	700.62	822.76	0.45	0.37	-0.41	
2341.00	39.31	57.28	2090.91	445.65	716.52	841.58	1.88	1.87	-0.40	
2373.00	39.69	57.65	2115.60	456.60	733.68	861.86	1.40	1.19	1.16	
2404.00	39.75	57.28	2139.44	467.25	750.38	881.60	0.79	0.19	-1.19	
2436.00	38.19	57.15	2164.32	478.15	767.30	901.65	4.88	-4.87	-0.41	
2467.00	38.38	56.65	2188.65	488.64	783.39	920.77	1.17	0.61	-1.61	
2498.00	38.94	56.40	2212.86	499.32	799.54	940.04	1.88	1.81	-0.81	
2528.00	38.56	56.78	2236.26	509.66	815.22	958.72	1.49	-1.27	1.27	
2556.00	38.56	56.28	2258.15	519.28	829.78	976.09	1.11	0.00	-1.79	
2588.00	37.56	56.90	2283.35	530.15	846.24	995.72	3.35	-3.12	1.94	
2619.00	36.56	57.03	2308.08	540.33	861.90	1014.32	3.24	-3.23	0.42	
2650.00	35.38	57.53	2333.17	550.17	877.22	1032.46	3.92	-3.81	1.61	



Weatherford International Ltd.

SURVEY REPORT



Weatherford

Company:	WILLIAMS PRODUCTION	Date:	10/9/2008	Time:	13:41:15	Page:	3
Field:	Rio Arriba Co., NM (NAD 83)	Co-ordinate(NE) Reference:	Well: #6C, True North				
Site:	Rosa Unit #6C	Vertical (TVD) Reference:	SITE: 6796.0				
Well:	#6C	Section (VS) Reference:	Well (0.00N, 0.00E, 62.28Azi)				
Wellpath:	1	Survey Calculation Method:	Minimum Curvature			Db:	Sypase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Comment
2681.00	34.50	57.40	2358.59	559.72	892.19	1050.15	2.85	-2.84	-0.42	
2713.00	34.88	57.53	2384.90	569.52	907.55	1068.30	1.21	1.19	0.41	
2745.00	35.00	57.40	2411.13	579.37	923.00	1086.56	0.44	0.37	-0.41	
2777.00	34.94	57.40	2437.35	589.26	938.45	1104.84	0.19	-0.19	0.00	
2808.00	35.06	57.40	2462.75	598.84	953.43	1122.55	0.39	0.39	0.00	
2840.00	35.00	57.27	2488.95	608.75	968.89	1140.85	0.30	-0.19	-0.41	
2872.00	33.81	57.90	2515.35	618.44	984.15	1158.87	3.88	-3.72	1.97	
2903.00	33.94	58.40	2541.09	627.56	998.83	1176.11	0.99	0.42	1.61	
2935.00	34.25	58.02	2567.59	637.01	1014.08	1194.00	1.18	0.97	-1.19	
2966.00	33.88	57.40	2593.27	646.29	1028.76	1211.31	1.64	-1.19	-2.00	
2998.00	32.69	57.03	2620.02	655.79	1043.52	1228.80	3.77	-3.72	-1.16	
3029.00	32.06	57.15	2646.20	664.81	1057.46	1245.33	2.04	-2.03	0.39	
3061.00	31.81	57.03	2673.36	674.01	1071.67	1262.19	0.81	-0.78	-0.37	
3091.00	31.44	56.65	2698.90	682.61	1084.83	1277.85	1.40	-1.23	-1.27	
3123.00	30.63	57.03	2726.32	691.64	1098.65	1294.27	2.60	-2.53	1.19	
3154.00	30.38	56.65	2753.03	700.25	1111.82	1309.94	1.02	-0.81	-1.23	
3186.00	29.81	56.65	2780.72	709.07	1125.22	1325.90	1.78	-1.78	0.00	
3218.00	29.00	56.78	2808.59	717.69	1138.36	1341.54	2.54	-2.53	0.41	
3249.00	27.94	56.53	2835.84	725.81	1150.70	1356.25	3.44	-3.42	-0.81	
3280.00	26.69	57.28	2863.39	733.58	1162.62	1370.41	4.18	-4.03	2.42	
3312.00	24.81	56.90	2892.21	741.13	1174.29	1384.26	5.90	-5.87	-1.19	
3343.00	24.63	56.53	2920.37	748.25	1185.13	1397.16	0.77	-0.58	-1.19	
3374.00	24.63	57.03	2948.55	755.32	1195.93	1410.02	0.67	0.00	1.61	
3406.00	25.13	57.28	2977.58	762.63	1207.24	1423.43	1.60	1.56	0.78	
3437.00	25.25	57.03	3005.63	769.78	1218.33	1436.57	0.52	0.39	-0.81	
3469.00	24.75	57.15	3034.63	777.13	1229.68	1450.04	1.57	-1.56	0.37	
3500.00	24.05	58.15	3062.86	783.98	1240.50	1462.80	2.62	-2.26	3.23	
3532.00	23.38	59.65	3092.16	790.63	1251.52	1475.65	2.82	-2.09	4.69	
3564.00	23.50	59.15	3121.52	797.11	1262.47	1488.36	0.73	0.37	-1.56	
3596.00	24.00	58.15	3150.81	803.82	1273.48	1501.22	2.01	1.56	-3.12	
3626.00	22.38	57.15	3178.38	810.14	1283.46	1513.00	5.56	-5.40	-3.33	
3658.00	21.19	56.78	3208.10	816.61	1293.42	1524.82	3.74	-3.72	-1.16	
3690.00	21.25	56.90	3237.93	822.94	1303.11	1536.35	0.23	0.19	0.37	
3722.00	20.88	56.78	3267.79	829.24	1312.74	1547.80	1.16	-1.16	-0.37	
3753.00	20.25	57.15	3296.81	835.17	1321.87	1558.64	2.08	-2.03	1.19	
3785.00	19.75	57.28	3326.88	841.10	1331.07	1569.54	1.57	-1.56	0.41	
3816.00	19.44	57.53	3356.09	846.70	1339.83	1579.90	1.04	-1.00	0.81	
3848.00	18.06	60.15	3386.39	852.03	1348.63	1590.17	5.05	-4.31	8.19	
3879.00	16.44	62.03	3416.00	856.48	1356.67	1599.36	5.53	-5.23	6.06	
3911.00	15.69	63.90	3446.75	860.50	1364.55	1608.21	2.85	-2.34	5.84	
3943.00	14.75	64.15	3477.62	864.18	1372.11	1616.61	2.94	-2.94	0.78	
3974.00	12.75	64.40	3507.73	867.38	1378.74	1623.97	6.45	-6.45	0.81	
4006.00	11.63	63.27	3539.01	870.36	1384.81	1630.72	3.58	-3.50	-3.53	
4037.00	11.19	62.40	3569.40	873.16	1390.26	1636.86	1.52	-1.42	-2.81	
4068.00	10.13	60.78	3599.86	875.88	1395.31	1642.59	3.55	-3.42	-5.23	
4099.00	9.19	58.90	3630.42	878.49	1399.81	1647.79	3.20	-3.03	-6.06	
4131.00	8.69	58.40	3662.03	881.08	1404.06	1652.75	1.58	-1.56	-1.56	
4161.00	8.44	56.53	3691.70	883.48	1407.82	1657.20	1.25	-0.83	-6.23	
4193.00	7.63	54.78	3723.39	886.00	1411.52	1661.64	2.64	-2.53	-5.47	
4225.00	6.50	53.03	3755.14	888.32	1414.70	1665.54	3.59	-3.53	-5.47	
4256.00	5.56	52.03	3785.97	890.30	1417.29	1668.75	3.05	-3.03	-3.23	
4287.00	4.69	54.53	3816.85	891.95	1419.50	1671.48	2.90	-2.81	8.06	
4319.00	4.06	56.28	3848.75	893.34	1421.51	1673.90	2.01	-1.97	5.47	



Weatherford International Ltd.

SURVEY REPORT

**Weatherford**

Company:	WILLIAMS PRODUCTION	Date:	10/9/2008	Time:	13:41:15	Page:	4
Field:	Rio Arriba Co., NM (NAD:83)	Co-ordinate(NE) Reference:	Well: #6C True North				
Site:	Rosa Unit #6C	Vertical (TVD) Reference:	SITE 6796.0				
Well:	#6C	Section (VS) Reference:	Well: (0.00N,0.00E,62.28Azi)				
Wellpath:	1	Survey Calculation Method:	Minimum Curvature			Db:	Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	N/S ft	E/W ft	VS ft	DLS deg/100ft	Build deg/100ft	Turn deg/100ft	Comment
4351.00	3.50	55.53	3880.68	894.52	1423.26	1676.00	1.76	-1.75	-2.34	
4382.00	2.94	52.78	3911.63	895.54	1424.67	1677.72	1.87	-1.81	-8.87	
4414.00	2.19	49.40	3943.60	896.44	1425.79	1679.13	2.39	-2.34	-10.56	
4444.00	1.50	48.15	3973.59	897.07	1426.52	1680.07	2.30	-2.30	-4.17	
4476.00	1.31	53.65	4005.58	897.57	1427.12	1680.84	0.73	-0.59	17.19	
4508.00	1.13	45.90	4037.57	898.00	1427.64	1681.50	0.76	-0.56	-24.22	
4538.00	1.19	53.53	4067.56	898.39	1428.11	1682.09	0.55	0.20	25.43	
4566.00	1.44	62.28	4095.56	898.73	1428.65	1682.73	1.14	0.89	31.25	LAST WFT SVY
4620.00	1.44	62.28	4149.54	899.36	1429.85	1684.09	0.00	0.00	0.00	PROJ TO BIT
8905.00	2.00	62.28	8432.59	959.19	1543.71	1812.70	0.01	0.01	0.00	LAST RIG SVY

Casing Points

MD ft	TVD ft	Diameter in	Hole Size in	Name
300.02	300.00	10.750	12.250	10 3/4"
4621.46	4151.00	0.000	0.000	7 5/8" Int. Csg. Pt.

Annotation

MD ft	TVD ft	
4566.00	4095.56	LAST WFT SVY
4620.00	4149.54	PROJ TO BIT
8905.00	8432.59	LAST RIG SVY