Form 3160-5 November 1994)

UNITED STATES DEPARTMENT OF THE INTERIOR BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED OMB No. 1004-0135 Expires July 31, 1996

MAR 2 6 2009

5. Lease Serial No.

SUNDRY NOTICES AND REPORTS ON WELLS

SF 078988

Do not use this form for proposals to drill or regular of Land Manage Memilindian, Allottee or Tribe Name abandoned well. Use Form 3160-3 (APD) for such propagation Field Off 7. If Unit or CA/Agreement, Name and/or No. SUBMIT IN TRIPLICATE -- Other instructions on reverse side Type of Well Northeast Blanco Unit 8. Well Name and No. Oil Well X Gas Well Name of Operator Northeast Blanco Unit #333 9. API Well No. Devon Energy Production Company, L.P. Address Phone No. (include area code) 30-045-32246 10. Field and Pool, or Exploratory Area PO Box 6459, Navajo Dam, NM 87419 505-327-4573 Location of Well (Footage, Sec., T., R., M., or Survey Description) Basin Dakota & Rosa Pictured Cliffs AND 1780' FNL & 1930' FEL Unit G OGRID#: 06137 Sec. 19, T31N, R06W San Juan County, New Mexico 12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA TYPE OF SUBMISSION TYPE OF ACTION Production (Start/Resume) Water Shut-Off Notice of Intent Acidize ☐ Deepen Reclamation Well Integrity Fracture Treat Alter Casing Recomplete M Other Commingle Subsequent Report Casing Repair New Construction Plug and Abandon Temporarily Abandon Application Change Plans Water Disposal Final Abandonment Notice Convert to Injection Plug Back Describe Proposed or Completed Operations (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones.

Attach the Bond under which the work will be performed or provide the Bond No on file with BLM/BIA. Required subsequent reports shall be filed within 30 days. Following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once Final Abandonment Nonces shall be filed only after all requirements, including reclamanon, have been completed, and the operator has determined that the site is ready for final inspection.) Devon requests administrative approval to pull the pkr & downhole commingle the Rosa Pictured Cliffs (96175) & Basin Dakota (71599). These intervals produce essentially dry gas & we have not experienced any significant cross flows between these two intervals, & all the fluids are compatible. Downhole commingling will improve recovery of liquids & gas, eliminate redundant surface equipment, & maximize productivity. Notice has been filed concurrently on form C-107A with the State. Since the two intervals do not have common ownership. Devon will utilize the test period described in the attached method of allocation. All of the interest owners of both intervals have been notified. RCVD MAR 30 '09 CIL CONS. DIV. DHC pend my DIST. 3 I hereby certify that the foregoing is true and correct Name (Printed/Typed) Title Petroleum Engineer (Agent) Mike Pippin Signature March 26, 2009 THIS SPACE FOR FEDERAL OR STATE USE Title Approved by 3-27-09 6eo Conditions of approval, if any, are attached. Approval of this notice does not warrant or Office certify that the applicant holds legal or equitable title to these rights in the subject lease FF which would entitle the applicant to conduct operations thereon.

fraudulent statements or representations as to any matter within its jurisdiction.

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or

Method of Allocation

Devon Energy recommends the following procedure to allocate downhole commingled production between the Basin-Dakota and the Fruitland Pictured Cliffs pools within the Northeast Blanco Unit:

- The Basin-Dakota and Fruitland Pictured Cliffs formations will be completed simultaneously.
- A single 2-3/8" tubing string will be run in the well, with a packer isolating the two horizons.
- The Dakota completion will be produced up the tubing string.
- The Fruitland Pictured Cliffs completion will be produced up the 2-3/8" x 4-1/2" annulus.
- Production from each zone will be measured separately using a 3 phase metering device prior to flowing through a mutual production separator. Total well stream gas will be measured using a conventional orifice plate meter tube located downstream of the production separator.
- The completions will be flow tested separately for approximately 90 days to establish a stabilized rate and trend.
- Following the testing period the packer will be removed and the two pools will be downhole commingled. Total well production will flow through common surface facilities and total produced gas will be measured.
- Production will be allocated between the Dakota and Fruitland Pictured Cliffs intervals by applying the variable percentage schedule to the daily total well production.

The Variable Percentage Schedule was derived using Basin-Dakota and Pictured Cliffs production type curves. These type curves were generated by normalizing production data from surrounding wells. The variable percentage schedule is required due to the dissimilar decline trends exhibited by the Pictured Cliffs and Dakota. Figure 1 depicts a typical Pictured Cliffs – Dakota production allocation. The actual percentages will vary from well to well, depending on well productivity.

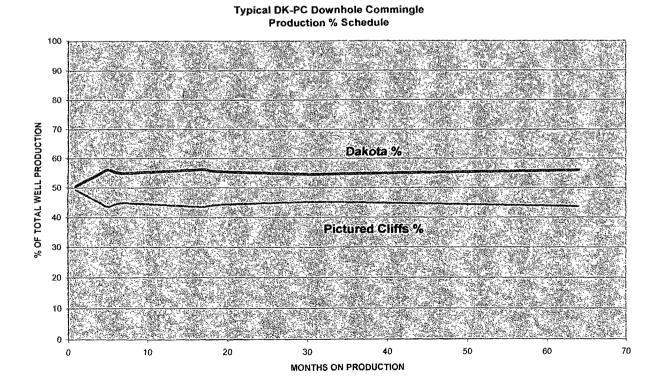


Figure 1

The Basin-Dakota type curve was generated from normalized production of 40 offsetting Basin-Dakota producers. The Basin-Dakota type curve clearly defines the decline rate for the life of a well. Comparison of this type curve with the production schedule obtained by using flow test data demonstrates the reliability of this method for projecting production. (See Figure 2) The curve covers a thirty two month period with a variance in cumulative normalized production of less than 0.1%.

NEBU AREA DAKOTA TYPE CURVE

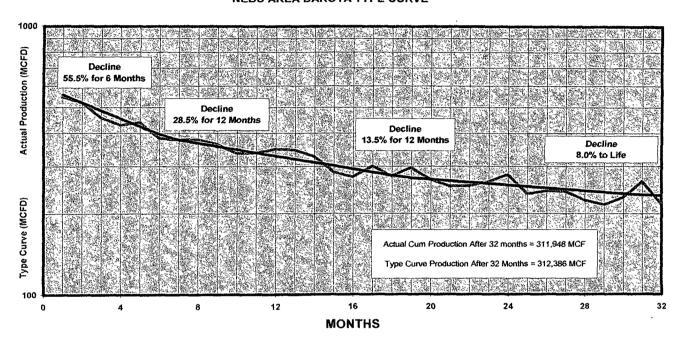


Figure 2

The Fruitland Pictured Cliffs type curve was generated from normalized production of 15 offsetting Fruitland Pictured Cliffs producers. The Fruitland Pictured Cliffs type curve clearly defines the decline rate for the life of a well. Comparison of this type curve with the production schedule obtained by using flow test data demonstrates the reliability of this method for projecting production. (See Figure 2) The curve covers a five year period with a variance in cumulative normalized production of only 0.8%.

NEBU AREA PICTURED CLIFFS TYPE CURVE

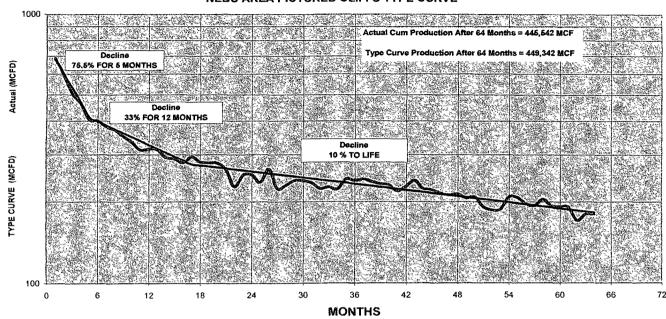


Figure 3