State of New Mexico Energy Mmerals and Natural Resources

Form C-144 July 21, 2008

District II

1301 W. Grand Ave., Artesia, NM 88210

District III

1000 Rio Brazos Rd , Aztec, NM 87410

District IV

1220 S St Francis Dr , Santa Fe, NM 87505

Department Oil Conservation Division 1220 South St. Francis Dr.

Santa Fe, NM 87505

For temporary pits, closed-loop sytems, and below-grade tanks, submit to the appropriate NMOCD District Office

For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office

Pit, Closed-Loop System, Below-Grade Tank, or Proposed Alternative Method Permit or Closure Plan Application Type of action: Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method X Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method

Modification to an existing permit

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

below-grade tank, or proposed alternative method

Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system,

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the

Occupation Resources Oil & Con Company I B
Operator: Burlington Resources Oil & Gas Company, LP OGRID#: 14538 Address: P.O. Box 4289, Farmington, NM 87499
Facility or well name: McCord B 1F
API Number: 30-045-34200 OCD Permit Number
U/L or Qtr/Qtr: L(NW/SW) Section: 23 Township: 30N Range: 13W County: San Juan
Center of Proposed Design: Latitude: 36.79815 °N Longitude: 107.18157 °W NAD: 1927 X 1983
Surface Owner: X Federal State Private Tribal Trust or Indian Allotment
X Pit: Subsection F or G of 19.15.17.11 NMAC
Closed-loop System: Subsection H of 19 15.17.11 NMAC Type of Operation: P&A Drilling a new well Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent) Drying Pad Above Ground Steel Tanks Haul-off Bins Other Lined Unlined Liner type Thickness mil LLDPE HDPE PVD Other Liner Seams Welded Factory Other
A Below-grade tank: Subsection I of 19.15.17.11 NMAC Volume: bbl Type of fluid. Tank Construction material: Secondary contamment with leak detection Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off Visible sidewalls and liner Visible sidewalls only Other Liner Type: Thickness mil HDPE PVC Other
Submittal of an exception request is required Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

Fencing: Subsection D of 19 15 17 11 NMAC (Applies to pernament pit, temporary pits, and below-grade tanks)				
Chain link, six feet in height, two strands of barbed wire at top (Required if located within 1000 feet of a permanent residence, school, hospital, institution or church)				
Four foot height, four strands of barbed wire evenly spaced between one and four feet				
Alternate Please specify				
7				
Netting: Subsection E of 19 15.17.11 NMAC (Applies to permanent pits and permanent open top tanks)				
Screen Notting Other				
Monthly inspections (If netting or screening is not physically feasible)				
8		i		
Signs: Subsection C of 19.15.17.11 NMAC 12" X 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers				
X Signed in compliance with 19 15.3 103 NMAC				
9 Administrative Approvals and Exceptions:				
Justifications and/or demonstrations of equivalency are required Please refer to 19 15.17 NMAC for guidance				
Please check a box if one or more of the following is requested, if not leave blank:				
Administrative approval(s). Requests must be submitted to the appropriate division district of the Santa Fe Environmental Bureau office for cons (Fencing/BGT Liner)	ideration of ap	proval.		
Exception(s) Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.				
10				
Siting Criteria (regarding permitting): 19.15 17.10 NMAC Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable				
source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau Office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above grade-tanks associated with a closed-loop system.				
Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. NM Office of the State Engineer - iWATERS database search, USGS; Data obtained from nearby wells	Yes	□No		
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other watercourse, lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	Yes	No		
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No		
(Applies to temporary, emergency, or cavitation pits and below-grade tanks)	□NA			
- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image				
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.	Yes	No		
(Applied to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	∐NA			
Within 500 horizonal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering	□vaa	□Na		
purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.	Yes	∐No		
- NM Office of the State Engineer - iWATERS database search, Visual inspection (certification) of the proposed site				
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended	Yes	No		
- Written confirmation or verification from the municipality; Written approval obtained from the municipality		□ .,		
Within 500 feet of a wetland US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	Yes	∐No		
Within the area overlying a subsurface mine Written confirmation or verification or map from the NM EMNRD - Mining and Mineral Division	Yes	No		
Within an unstable area.	□Yes	□No		
- Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map		□		
Within a 100-year floodplain	Yes	No		

Temporary Pits, Emergency Pits and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19 15.17 9 NMAC					
Instructions. Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15 17.9 NMAC					
Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19 15.17 9					
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17 10 NMAC					
Design Plan - based upon the appropriate requirements of 19.15.17 11 NMAC					
Operating and Maintenance Plan - based upon the appropriate requirements of 19 15 17.12 NMAC					
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of					
19 15 17.9 NMAC and 19.15.17.13 NMAC					
Previously Approved Design (attach copy of design) API or Permit					
Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19 15 17 9 NMAC Instructions: Each of the following items must be attached to the application Please indicate, by a check mark in the box, that the documents are attached Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15 17.9					
Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17 10 NMAC					
Design Plan - based upon the appropriate requirements of 19.15 17.11 NMAC					
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15 17.12 NMAC					
Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19 15 17.9 NMAC and 19.15.17.13 NMAC					
Previously Approved Design (attach copy of design) API					
Previously Approved Operating and Maintenance Plan API					
Permanent Pits Permit Application Checklist: Subsection B of 19.15 17 9 NMAC Instructions: Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached. Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15 17.9 NMAC Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC					
Climatological Factors Assessment					
Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC					
Dike Protection and Structural Integrity Design based upon the appropriate requirements of 19 15 17.11 NMAC					
Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC					
Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19 15.17.11 NMAC Quality Control/Quality Assurance Construction and Installation Plan					
Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC					
Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15 17 11 NMAC					
Nussance or Hazardous Odors, including H2S, Prevention Plan					
Emergency Response Plan					
Oil Field Waste Stream Characterization					
Monitoring and Inspection Plan					
Erosion Control Plan					
Closure Plan - based upon the appropriate requirements of Subsection C of 19.15 17 9 NMAC and 19.15.17.13 NMAC					
14 Proposed Closure: 19.15.17.13 NMAC					
Instructions: Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.					
Type Drilling Workover Emergency Cavitation P&A Permanent Pit Below-grade Tank Closed-loop System Alternative					
Proposed Closure Method: Waste Excavation and Removal					
Waste Removal (Closed-loop systems only)					
On-site Closure Method (only for temporary pits and closed-loop systems)					
☐In-place Burial ☐On-site Trench					
Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)					
Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan.					
Please indicate, by a check mark in the box, that the documents are attached. Protocols and Procedures - based upon the appropriate requirements of 19.15.17 13 NMAC					
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC					
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)					
Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC					
Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15 17 13 NMAC					
Ste Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC					

Form C-144 Oil Conservation Division Page 3 of 5

16 Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15 17.13 D NM/	۸٫۵			
Instructions: Please identify the faculty or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than	two facilities			
Disposal Facility Name				
Disposal Facility Name. Disposal Facility Permit # Disposal Facility Permit #:				
Will any of the proposed closed-loop system operations and associated activities occur on or in areas that will not be used for fut	i i			
Yes (If yes, please provide the information No	-			
Required for impacted areas which will not be used for future service and operations: Soil Backfill and Cover Design Specification - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC	NMAC			
Site Reciamation Fiant - based upon the appropriate requirements of subsection 6 of 12.13.17.13 (Wife				
Siting Criteria (Regarding on-site closure methods only: 19 15 17.10 NMAC Instructions. Each siting criteria requires a demonstration of compliance in the closure plan Recommendations of acceptable source material are provide certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19 15.17.10 NMAC for guidance.				
Ground water is less than 50 fect below the bottom of the buried waste. - NM Office of the State Engineer - iWATERS database search; USGS Data obtained from nearby wells	YesNo N/A			
Ground water is between 50 and 100 feet below the bottom of the buried waste	Yes No			
- NM Office of the State Engineer - 1WATERS database search; USGS; Data obtained from nearby wells	N/A			
Ground water is more than 100 feet below the bottom of the buried waste	Yes No			
- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	□N/A			
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).	Yes No			
- Topographic map, Visual inspection (certification) of the proposed site				
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. - Visual inspection (certification) of the proposed site, Aerial photo; satellite image	Yes No			
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal fee of any other fresh water well or spring, in existence at the time of the initial application. - NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site	Yes No			
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	Yes No			
Within 500 feet of a wetland - US Fish and Wildlife Wetland Identification map, Topographic map, Visual inspection (certification) of the proposed site	Yes No			
Within the area overlying a subsurface mine.	Yes No			
- Written confiramtion or verification or map from the NM EMNRD-Mining and Mineral Division				
Within an unstable area - Engineering measures incorporated into the design, NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society,	Yes No			
Topographic map				
Within a 100-year floodplain FEMA map	YesNo			
On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must bee attached to the coupling the box, that the documents are attached.	closure plan. Please indicate,			
Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15 17.10 NMAC				
Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC				
Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17 11 NMAC				
Construction/Design Plan of Temporary Pit (for in place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC				
Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC				
Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19 15.17.13 NMAC				
Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC				
Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)				
Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC				
Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC				

Operator Application Confifration
Operator Application Certification: Thereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.
Name (Print): Title:
Signature Datc.
e-mail address Telephone.
20
OCD Approval: Permit Application (including closure plan) Closure Plan (only) OCD Conditions (see attachment)
OCD Representative Signature: Approval Date:
Title: OCD Permit Number:
Title: OCD Permit Number:
21
Closure Report (required within 60 days of closure completion): Subsection K of 19 15 17 13 NMAC Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed
X Closure Completion Date: July 28, 2008
22
Closure Method:
Waste Excavation and Removal X On-site Closure Method Alternative Closure Method Waste Removal (Closed-loop systems only)
If different from approved plan, please explain
23 Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:
Instructions: Please identify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities
were utilized.
Disposal Facility Name. Disposal Facility Permit Number Disposal Facility Name. Disposal Facility Permit Number:
Disposal Facility Name. Disposal Facility Permit Number: Were the closed-loop system operations and associated activities performed on or in areas that will not be used for future service and operations?
Yes (If yes, please demonstrate complitane to the items below)
Required for impacted areas which will not be used for future service and operations
Stre Reclamation (Photo Documentation)
Soil Backfilling and Cover Installation Responsible to Application Potential South and Southing Technique
Re-vegetation Application Rates and Seeding Technique
. Closure Report Attachment Checklist: Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in
the box, that the documents are attached.
Yroof of Closure Notice (surface owner and division)
Y Proof of Deed Notice (required for on-site closure)
X Plot Plan (for on-site closures and temporary pits)
X Confirmation Sampling Analytical Results (if applicable)
Waste Material Sampling Analytical Results (if applicable) ☐ Disposal Facility Name and Permit Number
X Soil Backfilling and Cover Installation
X Re-vegetation Application Rates and Seeding Technique
X Site Reclamation (Photo Documentation)
On-site Closure Location: Latitude: 36.797907 °N Longitude: 107.181279 °W NAD 1927 X 1983
25 0 4 Cl
Operator Closure Certification: I hereby certify that the information and attachments submitted with this closure report is ture, accurate and complete to the best of my knowledge and belief. I also certify that
the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.
Name (Print) _ Ethel Tally Title. Staff Regulatory Technician
9,00000
Signature: Date: 8-27-09
e-mail address: ethel.tally@conocophillips.com Telephone: (505)599-4027
Approved Brancon Douell NMOCO 9-21-09 Form C-144 Oil Conservation Division Page 5 of 5

Burlington Resources Oil & Gas Company, LP San Juan Basin Closure Report

Lease Name: McCord B 1F API No.: 30-045- 34200

In accordance with Rule 19.15.17.13 NMAC the following information describes the closure of the temporary pit referenced above. All proper documentation regarding closure activities is being included with the C-144. The temporary pit for this location was constructed and location drilled before June 16, 2008 (effective date for Rule 19.15.17). While closure of the temporary pit did fall within the rule some dates for submittals are after the rig release date.

- Details on Capping and Covering, where applicable. (See report)
- Plot Plan (Pit Diagram) (Included as an attachment)
- Inspection Reports (Included as an attachment)
- Sampling Results (Included as an attachment)
- C-105 (Included as an attachment)
- Copy of Deed Notice will be filed with County Clerk (Not required on Federal, State, or Tribal land as stated by FAQ dated October 30, 2008)

General Plan:

1. All free standing liquids will be removed at the start of the pit closure process from the pit and disposed of in a division—approved facility or recycle, reuse or reclaim the liquids in a manner that the appropriate division district office approves.

All recovered liquids were disposed of at Basin Disposal (Permit #NM-01-005) and any sludge or soil required to be removed to facilitate closure was hauled to Envirotech Land Farm (Permit #NM-01-011).

2. The preferred method of closure for all temporary pits will be on-site burial, assuming that all the criteria listed in sub-section (B) of 19.15.17.13 are met.

The pit was closed using onsite burial

3. The surface owner shall be notified of BR's closing of the temporary pit as per the approved closure plan using certified mail, return receipt requested.

The closure process notification to the landowner was sent via email. (See Attached E-mail)(Well located on Federal Land, certified mail is not required per BLM/OCD MOU.)

4. Within 6 months of the Rig Off status occurring BR will ensure that temporary pits are closed, re-contoured, and reseeded.

Provision 4 of the closure plan requirements were not met due to rig move off date as noted on C-105 which was prior to pit rule change. Burlington will ensure compliance with this rule in the future.

- 5. Notice of Closure will be given to the Aztec Division office between 72 hours and one week of closure via email, or verbally. The notification of closure will include the following:
 - i. Operator's name
 - ii. Location by Unit Letter, Section, Township, and Range. Well name and API number.

Notification is attached.

6. Liner of temporary pit shall be removed above "mud level" after stabilization. Removal of liner will consist of manually or mechanically cutting liner at mud level and removing all remaining liner. Care will be taken to remove "All" of the liner i.e., edges of liner entrenched or buried. All excessive liner will be disposed of at a licensed disposal facility.

Liner of temporary pit was removed above "mud level" after stabilization. Removal of the liner consisted of manually cutting liner at mud level and removing all remaining liner. Care was taken to remove "ALL" of the liner i.e., edges of liner entrenched or buried. All excessive liner was disposed of at a licensed disposal facility, (San Juan County Landfill).

7. Pit contents shall be mixed with non-waste containing, earthen material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanically mixing. Pit contents will be mixed with non-waste, earthen material to a consistency that is deemed a safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

Burlington mixed the Pit contents with non-waste containing, earthen material in order to achieve the solidification process. The solidification process was accomplished by using a combination of natural drying and mechanically mixing. Pit contents were mixed with non-waste, earthen material to a consistency that is deemed as safe and stable. The mixing ratio consisted of approximately 3 parts clean soil to 1 part pit contents.

8. A five point composite sample will be taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.13(B)(1)(b). In the event that the criteria are not met, all contents will be handled per Subparagraph (a) of Paragraph (1) of Subsection B of 19.15.17.13 i.e., Dig and haul.

A five point composite sample was taken of the pit using sampling tools and all samples tested per Subsection B of 19.15.17.1 3(B)(1)(b). (Sample results attached).

Components	Tests Method	Limit (mg/Kg)	Results
Benzene	EPA SW-846 8021B or 8260B	0.2	ND
BTEX	EPA SW-846 8021B or 8260B	50	8 ug/KG
TPH	EPA SW-846 418.1	2500	28.6 mg/kg
GRO/DRO	EPA SW-846 8015M	500	12.4mg/Kg
Chlorides	EPA 300.1	1000/500	38mg/L

9. Upon completion of solidification and testing standards being passed, the pit area will be backfilled with compacted, non-waste containing, earthen material. A minimum of four feet of cover shall be achieved and the cover shall include one foot of suitable material to establish vegetation at the site, or the background thickness of topsoil, whichever is greater. If standard testing fails BR will dig and haul all contents pursuant to 19.15.17.13.i.a. After doing such, confirmation sampling will be conducted to ensure a release has not occurred.

The pit material passed solidification and testing standards. The pit area was then backfilled with compacted, non-waste containing, earthen material. More than four feet of cover was achieved and the cover included one foot of suitable material to establish vegetation at the site.

10. During the stabilization process if the liner is ripped by equipment the Aztec OCD office will be notified within 48 hours and the liner will be repaired if possible. If the liner can not be repaired then all contents will be excavated and removed.

The integrity of the liner was not damaged in the pit closure process.

11. Dig and Haul Material will be transported to the Envirotech Land Farm located 16 miles south of Bloomfield on Angel Peak Road, CR 7175. Permit # NM010011

Dig and Haul was not required.

12. Re-contouring of location will match fit, shape, line, form and texture of the surrounding. Re-shaping will include drainage control, prevent ponding, and prevent erosion. Natural drainages will be unimpeded and water bars and/or silt traps will be place in areas where needed to prevent erosion on a large scale. Final recontour shall have a uniform appearance with smooth surface, fitting the natural landscape.

The pit area was re-contoured to match fit, shape, line, form and texture of the surrounding area. Reshaping included drainage control, to prevent ponding and erosion. Natural drainages were unimpeded and water bars and/or silt traps were placed in areas where needed to prevent erosion on a large scale. Final recontour has a uniform appearance with smooth surface, fitting the natural landscape.

13. Notification will be sent to OCD when the reclaimed area is seeded.

Provision 13 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

14. BR shall seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished via drilling on the contour whenever practical or by other division-approved methods. BLM or Forest Service stipulated seed mixes will used on federal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (un-impacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds, and maintain that cover through two successive growing seasons. Repeat seeding or planting will be continued until successful vegetative growth occurs.

Provision 14 was accomplished through complying with BLM seeding requirements as allowed by the BLM/OCD MOU.

15. The temporary pit will be located with a steel marker, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial upon the abandonment of all the wells on the pad. The marker will be flush with the ground to allow access of the active well pad and for safety concerns. The marker will include a threaded collar to be used for future abandonment. The top of the marker will contain a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the operator's information at the time of all wells on the pad are abandoned. The operator's information will include the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

Provision 15 was accomplished by installing a steel marker in the temporary pit, no less than four inches in diameter, cemented in a hole three feet deep in the center of the onsite burial. The marker is flush with the ground to allow access of the active well pad and for safety concerns. The top of the marker contains a welded steel 12" square plate that indicates the onsite burial of the temporary pit. The plate contains the following: Operator Name, Lease Name, Well Name and number, Unit Number, Section, Township, Range and an indicator that the marker is an onsite burial location.

The plate will be easily removable and a four foot tall riser will be threaded into the top of the collar marker and welded around the base with the following operator's information at the time of all wells on the pad are abandoned. The riser will be labeled: Burlington, BLM, McCord B #1F, UL-L sec. 23, Twn 30N, Rge 13W, API # 30-045-34200

Tafoya, Crystal

From:

Tafoya, Crystal

Sent:

Thursday, July 10, 2008 8:16 AM

To: Subject: 'mark_kelly@nm.blm.gov' OCD Pit Closure Notification

The following temporary pits will be closed on-site. The new OCD Pit Rule 17 requires the surface owner be notified. Please feel free to contact me at any time if you have any questions. Thank you!

Allison Unit 2B

Allison Unit 40N

Angel Peak B 27E

Ballard 11F

Cain 725S

Canyon Largo Unit 250N

Canyon Largo Unit 279E

Canyon Largo Unit 288E

Canyon largo Unit 297E

Canyon Largo Unit 465E

Carson SRC 4E

Day B 4P

Day B 5A

East 17S

EPNG A 1B

EPNG B 1M

Federal A 1E

Filan 5M

Filan 5N

Fogelson 4 100

Fogelson 4 100S

Grambling C 202S

Hagood 19

Hamner 9S

Hardie 4P

Hare 295

Heaton Com 100

Helms Federal 1G

Howell 12

Huerfanito Unit 103F

Huerfanito Unit 29S

Huerfanito Unit 39S

Huerfanito Unit 47S

Huerfanito Unit 50E

Huerfanito Unit 75E Huerfanito Unit 83E

Huerfanito Unit 87E

indendino oni ore

Huerfanito Unit 90E

Huerfanito Unit 90M

Huerfanito Unit 98S

Huerfano Unit 108F

Huerfano Unit 282E

Huerfano unit 305

Huerfano unit 307

Huerfano Unit 554

Johnston Federal 24S

King 3

Lackey A Com 100S

Lambe 1C

Lambe 7S

Lively 8M

Lloyd A 100

Lloyd A 100S

Martin 100

McCord BUF:

McDurmitt Com 100S

McManus 13R

Mitchell 1S

Morris A 14

Newberry B 1N

Newsom B 503

Newsom B 8N

Pierce A 210S

Roelofs 1N

San Juan 27-4 Unit 132G

San Juan 27-4 Unit 132M

San Juan 27-4 Unit 139N

San Juan 27-4 Unit 140B

San Juan 27-4 Unit 141M

San Juan 27-4 Unit 147Y

San Juan 27-4 Unit 153B

San Juan 27-4 Unit 22M

San Juan 27-4 Unit 38P

San Juan 27-4 Unit 41N

San Juan 27-4 Unit 42N

San Juan 27-4 Unit 569N

San Juan 27-4 Unit 59N

San Juan 27-4 Unit 60M

San Juan 27-5 Unit 113F

San Juan 27-5 Unit 59N

San Juan 27-5 Unit 84N San Juan 27-5 unit 901

San Juan 27-5 Unit 902

San Juan 27-5 Unit 903

San Juan 27-5 Unit 904

San Juan 27-5 Unit 905

San Juan 27-5 Unit 906

San Juan 27-5 Unit 907

San Juan 27-5 Unit 908

San Juan 27-5 Unit 909

San Juan 27-5 Unit 910

San Juan 27-5 Unit 912

San Juan 27-5 Unit 913

San Juan 27-5 Unit 914

San Juan 27-5 Unit 915

San Juan 27-5 Unit POW 916

San Juan 28-4 Unit 27M

San Juan 28-5 Unit 54F

San Juan 28-5 Unit 62E

San Juan 28-5 Unit 63M

San Juan 28-5 Unit 76N

San Juan 28-5 Unit 77N San Juan 28-6 Unit 113N district i 1625 N. French Dr., Hobbs, N.M. 68240 State of New Mexico Energy, Minerals & Natural Resources Department

Form C-102 Revised August 15, 2000

DISTRICT II 811 South First, Artesia, N.M. 88210

DISTRICT III

OIL CONSERVATION DIVISION 1000 Rio Brazos Rd., Aztec, N.M. 87410 2040 South Pacheco Santa Fe, NM 87505

Submit to Appropriate District Office State Lease - 4 Copies Fee Lease - 3 Copies

DISTRICT IV 2040 South Pacheco, Santa Fo. NM 87605


☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

			Tranda T THEFT	
¹ API Number	*Pool Code		Pool Name	
30-045-	71599	BASIN	DAKOTA	
Property Code	⁶ Propert	y Name		o Well Number
7301	_ McCO	RD B		1F
OGRID No.	*Operato	r Name		* Elevation
14583	BURLINGTON RESOL	IRCES O&G CO LP		5718'

10 Surface Location Ill. or lot no. Section Township Lot Idn Feet from the North/South line Range Feet from the East/West line County L. 23 30N 13W 2410' SOUTH 1255 WEST NAUL NAZ "Bottom Hole Location If Different From Surface UL or lot no. Section Lot Idn Feet from the Township Range North/South line | Feet from the East/West line County "Dedicated Acres 13 Joint or Infill 14 Consolidation Code "Order No. 320.49 Acres - (W/2)

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED

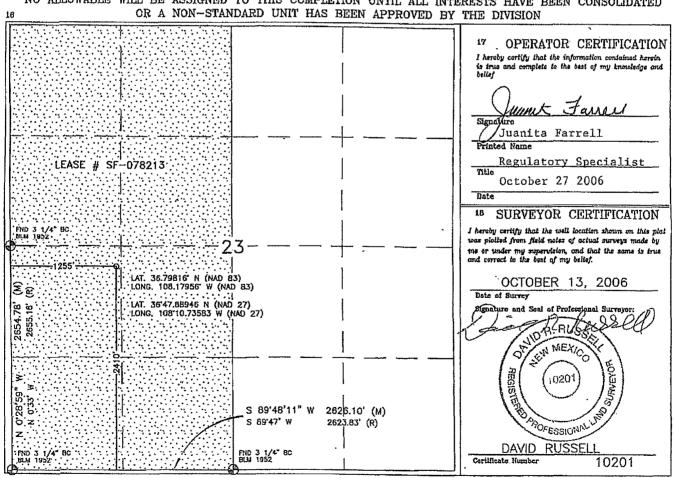

LATITUDE: 36.79815°N LONGITUDE: 108.18157°W DATUM: NAD 83


SLOPES TO BE CONSTRUCTED TO MATCH THE ORIGINAL CONTOURS AS CLOSE AS POSSIBLE.

BURLINGTON RESOURCES 0&G CO LP

McCORD B #1F
.2410' FSL & 670' FWL
LOCATED IN THE NW/4 SW/4 OF
SECTION 23, T30N, R13W, N.M.P.M.,
SAN JUAN COUNTY, NEW MEXICO
GROUND ELEVATION: 5664', NAVD 88
FINISHED PAD ELEVATION: 5665,4', NAVD 88





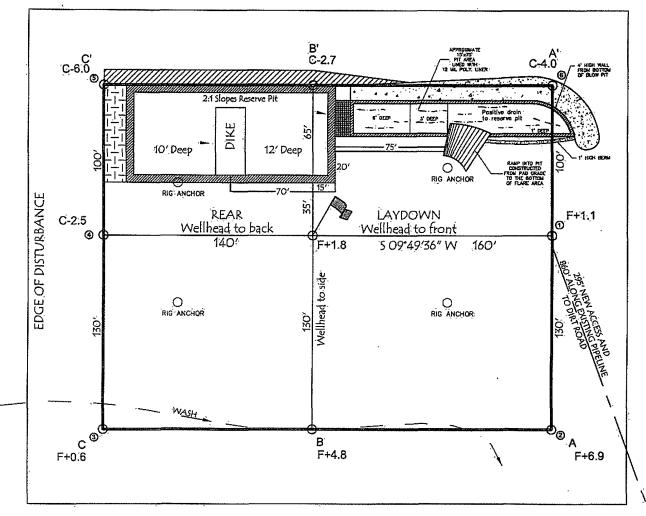

330' x 400' = 3.03 ACRES OF DISTURBANCE

SCALE: 1" = 60'

JOB No.: COPC041; REV3

DATE: 04/25/07

NOTE:
RESERVE PIT DIKE: TO BE 8' ABOVE DEEP SIDE (OVERFLOW - 3' MIDE AND 1' ABOVE SHALLOW SIDE).
RUSSELL SURVEYING, INC. IS NOT LIABLE FOR UNDERGROUND UTILITIES OR PIPELINES.
CONTRACTOR SHOULD CALL ONE-CALL FOR LOCATION OF ANY MARKED OR UNMARKED, BURIED PIPELINES OR
CABLES ON WELL PAD, IN CONSTRUCTION ZONE AND/OR ACCESS ROAD AT LEAST TWO (2) WORKING DAYS PRIOR
TO CONSTRUCTION.



Russell Surveying 1409 W. Aztec Bivd. #5 Aztec, New Mexico 87410 (505) 334-8637



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

		N.	
Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	McCord BilF	Date Reported:	08-07-08
Laboratory Number:	46584	Date Sampled:	07-28-08
Chain of Custody No:	4511	Date Received:	08-01-08
Sample Matrix:	Soil	Date Extracted:	08-05-08
Preservative:		Date Analyzed:	08-06-08
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	12.4	0.1
Total Petroleum Hydrocarbons	12.4	0.2

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

Drill Pit Samples

Analyst

Musturn Wallen
Review



EPA METHOD 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	McCord B1F Background	Date Reported:	08-07-08
Laboratory Number:	46585	Date Sampled:	07-28-08
Chain of Custody No:	4511	Date Received:	08-01-08
Sample Matrix:	Soil	Date Extracted:	08-05-08
Preservative:		Date Analyzed:	08-06-08
Condition:	Intact	Analysis Requested:	8015 TPH

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)
Gasoline Range (C5 - C10)	ND	0.2
Diesel Range (C10 - C28)	ND	0.1
Total Petroleum Hydrocarbons	ND	0.2

ND - Parameter not detected at the stated detection limit.

References: Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments: **Drill Pit Samples**

Analyst

Review



EPA Method 8015 Modified Nonhalogenated Volatile Organics Total Petroleum Hydrocarbons

Quality Assurance Report

Client:	QA/QC		Project #:		N/A
Sample ID:	08-06-08 QA/C)C	Date Reported:		08-07-08
Laboratory Number:	46580		Date Sampled:		N/A
Sample Matrix:	Methylene Chlori	ide	Date Received:		N/A
Preservative:	N/A		Date Analyzed:		08-06-08
Condition:	N/A		Analysis Reque	sted:	TPH
33/14/11/37/11				0.00.	
	I-Cal Date	I-Cal RF:	C-Cal RF:	% Difference	Accept, Range
Gasoline Range C5 - C10	05-07-07	9.9828E+002	9.9868E+002	0.04%	0 - 15%
Diesel Range C10 - C28	05-07-07	9.9648E+002	9.9688E+002	0.04%	0 - 15%
3	V.				
Blank Conc. (mg/L - mg/Kg)		Concentration		Detection Limit	
Gasoline Range C5 - C10		ND		0.2	
Diesel Range C10 - C28		ND		0.1	
Total Petroleum Hydrocarbons		ND		0.2	
•					
Duplicate Conc. (mg/Kg)	Sample	Duplicate	% Difference	Accept. Range	·
Gasoline Range C5 - C10	2.2	2.2	0.0%	0 - 30%	
Diesel Range C10 - C28	147	146	0.6%	0 - 30%	
· ·					
Spike Conc. (mg/Kg)	Sample	Spike Added	Spike Result	% Recovery	Accept. Range
Gasoline Range C5 - C10	2.2	250	251	99.6%	75 - 125%
Diesel Range C10 - C28	147	250	403	102%	75 - 125%
•					

ND - Parameter not detected at the stated detection limit.

References:

Method 8015B, Nonhalogenated Volatile Organics, Test Methods for Evaluating Solid Waste,

SW-846, USEPA, December 1996.

Comments:

QA/QC for Samples 46580 - 46589.

Analyst



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	McCord B1F	Date Reported:	08-07-08
Laboratory Number:	46584	Date Sampled:	07 - 28-08
Chain of Custody:	4511	Date Received:	08-01-08
Sample Matrix:	Soil	Date Analyzed:	08-06-08
Preservative:		Date Extracted:	08-05-08
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	ND	0.9
Toluene	1.5	1.0
Ethylbenzene	1.6	1.0
p,m-Xylene	2.6	1.2
o-Xylene	2.3	0.9
Total BTEX	8.0	

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	98.0 %
	1,4-difluorobenzene	98.0 %
	Bromochlorobenzene	98.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drill Pit Samples

Analyst

Mustum Walter Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	McCord B1F Background	Date Reported:	08-07-08
Laboratory Number:	46585	Date Sampled:	07-28-08
Chain of Custody:	4511	Date Received:	08-01-08
Sample Matrix:	Soil	Date Analyzed:	08-06-08
Preservative:		Date Extracted:	08-05-08
Condition:	Intact	Analysis Requested:	BTEX

Parameter	Concentration (ug/Kg)	Det. Limit (ug/Kg)
Benzene	1.2	0.9
Toluene	1.2	1.0
Ethylbenzene	1.1	1.0
p,m-Xylene	2.5	1.2
o-Xylene	1.6	0.9
Total BTEX	7.6	

ND - Parameter not detected at the stated detection limit.

Surrogate Recoveries:	Parameter	Percent Recovery
	Fluorobenzene	97.0 %
	1,4-difluorobenzene	97.0 %
	Bromochlorobenzene	97.0 %

References:

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic Volatile Organics, Test Methods for Evaluating Solid Waste, SW-846,

USEPA, December 1996.

Comments:

Drill Pit Samples

Analyst

'Muslim Ma Review



EPA METHOD 8021 AROMATIC VOLATILE ORGANICS

ND

0.1

Client:	N/A		Project #		N/A	
Sample ID:	08-06-BT QA/QC		Date Reported:		08-07-08	
Laboratory Number:	46580		Date Sampled:		N/A	
Sample Matrix:	Soil		Date Received:		N/A	
Preservative ⁻	N/A		Date Analyzed:		08-06-08	
Condition:	N/A		Analysis:		BTEX	
Calibration and Detection Limits (ug/L)	I-Cal RF:	C-Cal RF: Accept: Rar	%Diff. ige 0 - 15%	Blank Conc	Detect.	
Benzene	8 5285E+007	8.5456E+007	0.2%	ND	0.1	
Toluene	6 4832E+007	6.4962E+007	0.2%	ND	0.1	
Ethylbenzene	5 1253E+007	5.1355E+007	0.2%	ND	0.1	
p,m-Xylene	1.0553E+008	1.0575E+008	0.2%	ND	0.1	

4 9491E+007

Duplicate Conc. (ug/Kg)	Sample Du	plicate	%Diff.	Accept Range	Detect. Limit
Benzene	6.1	6.0	1.6%	0 - 30%	0.9
Toluene	18.3	18.0	1.6%	0 - 30%	1.0
Ethylbenzene	5.6	5.3	5.4%	0 - 30%	1.0
p,m-Xylene	223	222	0.3%	0 - 30%	1.2
o-Xylene	29.5	29.1	1.4%	0 - 30%	0.9

4.9590E+007

0.2%

Spike Conc. (ug/Kg)	Sample	unt Spiked Spik	ed Sample	% Recovery	Accept Range
Benzene	6.1	50.0	55.7	99.3%	39 - 150
Toluene	18.3	50.0	66.3	97.1%	46 - 148
Ethylbenzene	5.6	50.0	52.6	94.6%	32 - 160
p,m-Xylene	223	100	320	98.9%	46 - 148
o-Xylene	29.5	50.0	77.4	97.4%	46 - 148

ND - Parameter not detected at the stated detection limit.

References

o-Xylene

Method 5030B, Purge-and-Trap, Test Methods for Evaluating Solid Waste, SW-846, USEPA,

December 1996.

Method 8021B, Aromatic and Halogenated Volatiles by Gas Chromatography Using

Photoionization and/or Electrolytic Conductivity Detectors, SW-846, USEPA December 1996.

Comments:

QA/QC for Samples 46580 - 46589.

Analyst

Review



TRACE METAL ANALYSIS

Client:	ConocoPhillips	Project #:	96052-0026
	•	•	
Sample ID:	McCord B 1F	Date Reported:	08-06-08
Laboratory Number:	46584	Date Sampled:	07-28-08
Chain of Custody:	4511	Date Received:	08-01-08
Sample Matrix:	Soil	Date Analyzed:	08-05-08
Preservative:		Date Digested:	08-04-08
Condition:	Intact	Analysis Needed:	Total Metals

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)	TCLP Regulatory Level (mg/Kg)
Arsenic	0.050	0.001	5.0
Barium	3.51	0.001	100
Cadmium	0.001	0.001	1.0
Chromium	0.026	0.001	5.0
Lead	0.114	0.001	5.0
Mercury	ND	0.001	0.2
Selenium	0.011	0.001	1.0
Silver	ND	0.001	5.0

ND - Parameter not detected at the stated detection limit.

References:

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectroscopy, SW-846, USEPA, December 1996.

Note:

Regulatory Limits based on 40 CFR part 261 subpart C

section 261.24, August 24, 1998.

Comments:

Drill Pit Sample.

Analyst



TRACE METAL ANALYSIS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	McCord B 1F Background	Date Reported:	08-06-08
Laboratory Number:	46585	Date Sampled:	07-28-08
Chain of Custody:	4511	Date Received:	08-01-08
Sample Matrix:	Soil	Date Analyzed:	08-05-08
Preservative:		Date Digested:	08-04-08
Condition:	Intact	Analysis Needed:	Total Metals

Parameter	Concentration (mg/Kg)	Det. Limit (mg/Kg)	TCLP Regulatory Level (mg/Kg)
Arsenic	0.088	0.001	5.0
Barium	4.17	0.001	100
Cadmium	0.004	0.001	1.0
Chromium	0.065	0.001	5.0
Lead	0.115	0.001	5.0
Mercury	ND	0.001	0.2
Selenium	0.017	0.001	1.0
Silver	ND	0.001	5.0

ND - Parameter not detected at the stated detection limit.

References:

Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectroscopy, SW-846, USEPA, December 1996.

Note:

Regulatory Limits based on 40 CFR part 261 subpart C

section 261.24, August 24, 1998.

Comments:

Drill Pit Sample.

Analyst

Review



TRACE METAL ANALYSIS Quality Control / Quality Assurance Report

Client:		QA/QC		Project #:			QA/QC
Sample ID:		08-05 TM	ΔΑ/Δ C	•			08-06-08
Laboratory Number:		46580	Z/V/O	Date Samp		J	N/A
Sample Matrix:		Soil		Date Rece			N/A
Analysis Requested:		Total RCR	A Metals	Date Analy			08-05-08
Condition:		N/A	A Miciais	Date Diges			08-04-08
Condition.		IN/A		Date Diges	iteu.		00-04-00
2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Instrument lank (mg/K	Method g) Blank	Detection Limit	A STATE OF THE PARTY OF THE PAR	Duplicate	% Diff.	Acceptance Range
Arsenic	ND	ND	0.001	ND	ND	0.0%	0% - 30%
Barium	ND	ND	0.001	33.1	33.1	0.0%	0% - 30%
Cadmium	ND	ND	0.001	0.008	0.009	13.8%	0% - 30%
Chromium	ND	ND	0.001	0.173	0.164	5.0%	0% - 30%
Lead	ND	ND	0.001	0.346	0.343	0.8%	0% - 30%
Mercury	ND	ND	0.001	ND	ND	0.0%	0% - 30%
Selenium	ND	ND	0.001	ND	ND	0.0%	0% - 30%
Silver	ND	ND	0.001	ND	ND	0.0%	0% - 30%
8 ***20 . A. "Y"			Mark + Carren	. 1 3 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	S. N. S. Marker S. S. Marker S. S. Marker S.		100 marks 100 ma
Spike		Spike	Sampl	· · · · · · · · · · · · · · · · · · ·	Percent		Acceptance
Conc. (mg/Kg)		Added		Sample	Recovery		Range
Arsenic		0.250	ND	0.274	109%		80% - 120%
Barium		0.500	33.1	29.6	88.1%		80% - 120%
Cadmium		0.250	0.008	0.238	92.4%		80% - 120%
Chromium		0.500	0.173	0.549	81.6%		80% - 120%
Lead		0.500	0.346	0.696	82.3%		80% - 120%
Mercury		0.100	ND	0.096	96.4%		80% - 120%
Selenium		0.100	ND	0.097	97.2%		80% - 120%
Silver		0.100	ND	0.085	84.6%		80% - 120%
J					-		

ND - Parameter not detected at the stated detection limit.

References: Method 3050B, Acid Digestion of Sediments, Sludges and Soils.

SW-846, USEPA, December 1996.

Method 6010B, Analysis of Metals by Inductively Coupled Plasma Atomic Emmision

Spectorscopy, SW-846, USEPA, December 1996.

Comments: **QA/1QC for Samples 46580 - 46589.**

 $\frac{1}{t}$



CATION / ANION ANALYSIS

Client:	ConocoPhillips	Proiect #:	96052-0026
Sample ID:	McCord B1F	Date Reported:	08-11-08
Laboratory Number:	46584	Date Sampled:	07-28-08
Chain of Custody:	4511	Date Received:	08-01-08
Sample Matrix:	Soil Extract	Date Extracted:	08-04-08
Preservative:		Date Analyzed:	08-05-08
Condition:	Intact		

	Analytical			
Parameter	Result	Units		
pH	7.25	s.u.		
Conductivity @ 25° C	245	umhos/cm		
Total Dissolved Solids @ 180C	156	mg/L		
Total Dissolved Solids (Calc)	141	mg/L		
SAR	1.4	ratio		
Total Alkalinity as CaCO3	60.0	mg/L		
Total Hardness as CaCO3	55.9	mg/L		
Bicarbonate as HCO3	60.0	mg/L	0.98	meq/L
Carbonate as CO3	<0.1	mg/L	0.00	meq/L
Hydroxide as OH	<0.1	mg/L	0.00	meq/L
Nitrate Nitrogen	<0.01	mg/L	0.00	meq/L
Nitrite Nitrogen	0.100	mg/L	0.00	meq/L
Chloride	38.0	mg/L	1.07	meq/L
Fluoride	0.500	mg/L	0.03	meq/L
Phosphate	6.30	mg/L	0.20	meq/L
Sulfate	11.0	mg/L	0.23	meq/L
Iron	1.54	mg/L	0.06	meq/L
Calcium	20.5	mg/L	1.02	meq/L
Magnesium	1.12	mg/L	0.09	meq/L
Potassium	3.23	mg/L	0.08	meq/L
Sodium	23.6	mg/L	1.03	meq/L
Cations			2.28	meq/L
Anions			2.51	meq/L
Cation/Anion Difference			9.24%	

Reference: U.S.E.P.A., 600/4-79-020, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: Drill Pit Sample.

Analyst

(Mostre m Walter



CATION / ANION ANALYSIS

Client:	ConocoPhillips	Project #:	96052-0026	
Sample ID:	McCord B1F Background	Date Reported:	08-11-08	
Laboratory Number:	46585	Date Sampled:	07-28-08	
Chain of Custody:	4511	Date Received:	08-01-08	
Sample Matrix:	Soil Extract	Date Extracted:	08-04-08	
Preservative:		Date Analyzed:	08-05-08	
Condition:	Intact			

	Analytical			
Parameter	Result	Units		
рН	8.31	s.u.		
Conductivity @ 25° C	561	umhos/cm		
Total Dissolved Solids @ 180C	328	mg/L		
Total Dissolved Solids (Calc)	305	mg/L		
SAR	6.9	ratio		
Total Alkalinity as CaCO3	97.0	mg/L		
Total Hardness as CaCO3	34.7	mg/L		
Bicarbonate as HCO3	97.0	mg/L	1.59	meq/L
Carbonate as CO3	<0.1	mg/L	0.00	meq/L
Hydroxide as OH	<0.1	mg/L	0.00	meq/L
Nitrate Nitrogen	<0.01	mg/L	0.00	meq/L
Nitrite Nitrogen	<0.01	mg/L	0.00	meq/L
Chloride	93.5	mg/L	2.64	meq/L
Fluoride	0.600	mg/L	0.03	meq/L
Phosphate	0.251	mg/L	0.01	meq/L
Sulfate	40.0	mg/L	0.83	meq/L
Iron	0.418	mg/L	0.01	meq/L
Calcium	12.7	mg/L	0.63	meq/L
Magnesium	0.732	mg/L	0.06	meq/L
Potassium	5.28	mg/L	0.14	meq/L
Sodium	93.0	mg/L	4.05	meq/L
Cations			4.89	meg/L
Anions			5.10	meq/L
Cation/Anion Difference			4.12%	

Reference: U.S.E.P.A., 600/4-79-020, "Methods for Chemical Analysis of Water and Wastes", 1983. Standard Methods For The Examination of Water And Waste Water", 18th ed., 1992.

Comments: Drill Pit Sample.

Analyst

Mustum Walter Review



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	McCord B 1F	Date Reported:	08-05-08
Laboratory Number:	46584	Date Sampled:	08-01-08
Chain of Custody No:	4911	Date Received:	08-01-08
Sample Matrix:	Soil	Date Extracted:	08-04-08
Preservative:		Date Analyzed:	08-04-08
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

28.6

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drill Pit Sample.

Analyst

Muster m Wceters
Review



EPA METHOD 418.1 TOTAL PETROLEUM HYDROCARBONS

Client:	ConocoPhillips	Project #:	96052-0026
Sample ID:	McCord B 1F Background	Date Reported:	08-05-08
Laboratory Number:	46585	Date Sampled:	08-01-08
Chain of Custody No:	4911	Date Received:	08-01-08
Sample Matrix:	Soil	Date Extracted:	08-04-08
Preservative:		Date Analyzed:	08-04-08
Condition:	Intact	Analysis Needed:	TPH-418.1

		Det.
	Concentration	Limit
Parameter	(mg/kg)	(mg/kg)

Total Petroleum Hydrocarbons

42.9

5.0

ND = Parameter not detected at the stated detection limit.

References:

Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments:

Drill Pit Sample.

Analyst

Mustine on Welles



EPA METHOD 418.1 TOTAL PETROLEUM HYROCARBONS QUALITY ASSURANCE REPORT

Client:	QA/QC	Project #:	N/A
Sample ID:	QA/QC	Date Reported:	08-05-08
Laboratory Number:	08-04-TPH.QA/QC 46580	Date Sampled:	N/A
Sample Matrix:	Freon-113	Date Analyzed:	80-0-80
Preservative:	N/A	Date Extracted:	08-04-08
Condition:	N/A	Analysis Needed:	TPH

Calibration y I-Cal Date					Accept. Range
08-01-08	08-0-08	1,790	1,750	2.2%	+/- 10%

Blank Conc. (mg/Kg) TPH	on groups of the state of the s	Concentration ND		Detection Limi	t 🎉 🕺 🔆
Duplicate Conc. (mg/Kg TPH		Sample 214	Duplicate	% Difference 20.0%	Accept. Range
Spike Conc. (mg/Kg)	Samplé 214	Spike Added	Spike Result 2,250	% Recovery 102%	Accept Range 80 - 120%

ND = Parameter not detected at the stated detection limit.

References: Method 418.1, Petroleum Hydrocarbons, Total Recoverable, Chemical Analysis of Water

and Waste, USEPA Storet No. 4551, 1978.

Comments: QA/QC for Samples 46558, 46559, 46561 - 46563, 46567, 46470, 46571 and 46576 - 46578.

Analyst

Musture of Walters
Review

Submit To Approp Two Copies District I		State of New Mexico Energy, Minerals and Natural Resources						Form C-105 July 17, 2008											
1625 N. French Dr., Hobbs, NM 88240 District II 1301 W. Grand Avenue, Artesia, NM 88210				Oil Conservation Division						1. WELL API NO. 30-045-34200									
District III 1000 Rio Biazos Rd., Aztec, NM 87410						20 South S						2 Type of Lease STATE ☐ FEE ☒ FED/INDIAN							
District IV 1220 S St Francis Dr., Santa Fe, NM 87505 Santa Fe, NM 87505										3. State Oil & Gas Lease No. Federal SF-078213									
WELL COMPLETION OR RECOMPLETION REPORT AND LOG																			
4. Reason for filing:										Lease Name or Unit Agreement Name McCord B									
COMPLETION REPORT (Fill in boxes #1 through #31 for State and Fee wells only)									6. Well Number: 1F										
C-144 CLOSURE ATTACHMENT (Fill in boxes #1 through #9, #15 Date Rig Released and #32 and/or #33; attach this and the plat to the C-144 closure report in accordance with 19.15.17.13.K NMAC) 7. Type of Completion:																			
NEW WELL ☐ WORKOVER ☐ DEEPENING ☐ PLUGBACK ☐ DIFFERENT RESERVOIR ☐ OT																			
8. Name of Oper Burlington Reso	urces Oil	Gas Compa	any, <u>LP</u>								9. OGRID 14538								
10. Address of O	perator											11. Pool name or Wildcat							
12.Location	Unit Ltr	Section	on	Towns	hip	Range	Lot		Feet from the		the	N/S Line	Feet from the E/		E/W I	W Line County			
Surface:				ļ					_										
BH:	11115			1								(D) (1) (D)	<u>L.</u>		<u> </u>	. (5)	LOVE		
13. Date Spudde	d 14. Da	ate T.D. Re	ached		vate R1g /2008	Released			16.	Date Comp	letec	(Ready to Prod	duce) 17 Elevations (DF and RI RT, GR, etc.)			and KKB,			
18. Total Measur	red Depth	of Well		19. Plug Back Measured Depth					20. Was Directiona			Il Survey Made? 21. Type Electric and Other Logs Ru					her Logs Run		
22. Producing In	terval(s), o	of this comp	pletion -	Top, Bot	tom, Na	ame								·					
23					CAS	ING REC	ORJ	D (Re	epo	ort all st	rin	gs set in w	ell)			-			
CASING SI	ZE	WEIG	HT LB./	FT.		DEPTH SET			НО	LE SIZE		CEMENTIN	G RE	CORD	AN	MOUNT	PULLED		
					-		+												
							$\neg \dagger$				-								
24.					LINI	ER RECORD					25.		HOII	VIC PECO) DID	-	_		
SIZE	TOP		ВО	ТТОМ	LIM	SACKS CEM	ENT	SCRI	EEN	Į		5. TUBING RECORD IZE DEPTH SET PACKER					ER SET		
26. Perforation	record (in	terval size	and nu	mber)		<u> </u>		27	ACI	D SHOT	ER	ACTURE CE	MEN	ILOS TI	FZE	FTC	_		
26. Perforation record (interval, size, and number)									27. ACID, SHOT, FRACTURE, CEMENT, SQUEEZE, ETC. DEPTH INTERVAL AMOUNT AND KIND MATERIAL USED										
												 							
28.							PRO	DDU	\mathbf{C}	CION		<u> </u>							
28. PRODUCTION Date First Production Production Method (Flowing, gas lift, pumping - Size and type pump) Well Status (Prod. or Shut-in)																			
Date of Test	Hours	Tested	Ch	oke Size Prod'n For Test Period			Oil -	Oil - Bbl G		Ga	s - MCF	w 	Water - Bbl		Gas - Oil Ratio				
Flow Tubing Press.	Casıng	g Pressure		Calculated 24- Oil - Bbl. Hour Rate			<u> </u>	Gas - MCF		 	Water - Bbl.		Oil Gravity - AP		PI - (Corr.)				
29. Disposition o	29. Disposition of Gas (Sold, used for fuel, vented, etc.)				30. Test Witnessed By														
31. List Attachments																			
32. If a temporary pit was used at the well, attach a plat with the location of the temporary pit. See attached pad diagram. 33 If an on-site burial was used at the well, report the exact location of the on-site burial:																			
33 If an on-site l	burial was								~ -		000								
I hereby certi	fy that th			97907°N :hown c	Loi on both	ngitude 107.181 In sides of this	1219°V 5 form	v NA i is tri	υ <u>∟</u> ue α		983 lete	to the best o	f mv	knowled	lge an	d belie	f		
Signature)th	07	al	0	Prir		•			•		`		Date:	Ü	ū			
E-mail Addre	E-mail Address ethel.tally@conocophillips.com																		

ConocoPhillips

Pit Closure Form:
Date: 7-28-2008
Well Name: McCord BIF
Footages: 2380 FSL 690 FWL Unit Letter: L
Section: <u>Z3</u> , T- <u>30</u> -N, R- <u> 3</u> -W, County: <u>S5</u> State: <u>NM</u>
Contractor Closing Pit: Aztec
Construction Inspector: Norman Faver Date: 7-28-2008
Inspector Signature: Norman F

Tally, Ethel

From:

Busse, Dollie L

Sent:

Monday, July 21, 2008 11:48 AM

To:

Brandon Powell; Mark Kelly; Robert Switzer; Sherrie Landon

Cc:

Chavez, Virgil E; Kramme, Jeff L; 'Faver Norman'; 'Aztec Excavation'; Randy Flaherty; 'G Meador'; Blair, Maxwell O; Blakley, Maclovia; Clark, Joan E; Farrell, Juanita R; Finkler, Jane;

Maxwell, Mary A (SOS Staffing Services, Inc.); McWilliams, Peggy L; Seabolt, Elmo F

Subject:

Clean Up Notice - McCord B 1F

Importance:

High

Attachments:

McCord B 1F.pdf

Aztec Excavation will move a tractor to the McCord B 1F on Wednesday, July 23 to start the reclamation process. Please contact Norman Faver (320-0670) if you have any questions or need additional information. Thanks!

Dollie

Network #: 10159477 (HZ)

Operator:

ConocoPhillips

Legals:

2380' FSL, 690' FWL Section 23, T30N, R13W Unit Letter 'L' (NWSW)

San Juan County, NM

Lease:

SF-078213

API#:

30-045-34200

Surface/Minerals:

BLM/BLM



Dollie L. Busse


ConocoPhillips Company-SJBU Construction Technician Project Development 505-324-6104 505-599-4062 (fax)


Dollie.L.Busse@conocophillips.com





Reclamation Form:
Date: 7-30-2009
Well Name: McCord BIF
Footages: 2380 FSL 690 FWh Unit Letter: L
Section: <u>23</u> , T- <u>30</u> -N, R- <u>13</u> -W, County: <u>53</u> State: <u>NM</u>
Reclamation Contractor:
Reclamation Date: 7-28-2008
Road Completion Date: 7-29-2008
Seeding Date: 7-30-2008 Also Reserved Area across Glade RD for BLM 117
Construction Inspector: Norman Favor Date: 7-30-2008
Inspector Signature:


Gai:

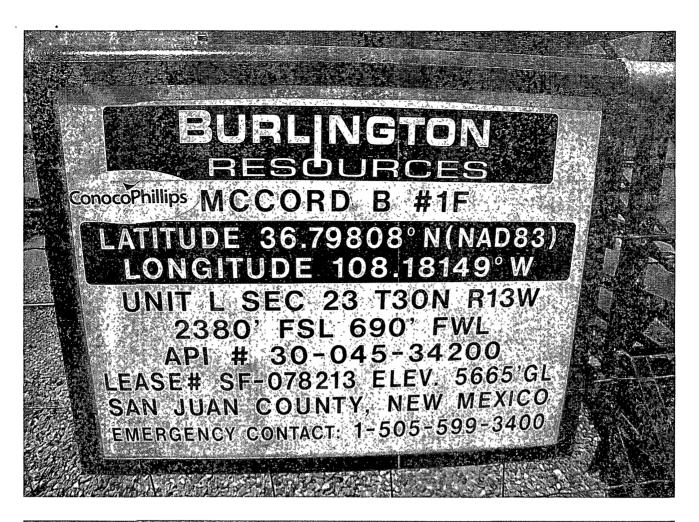

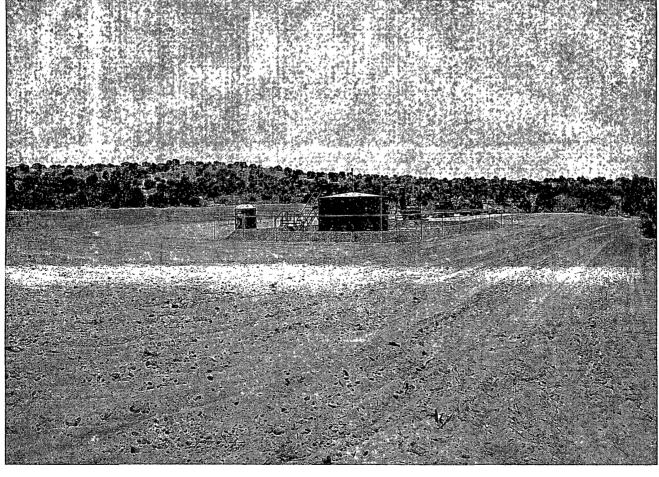

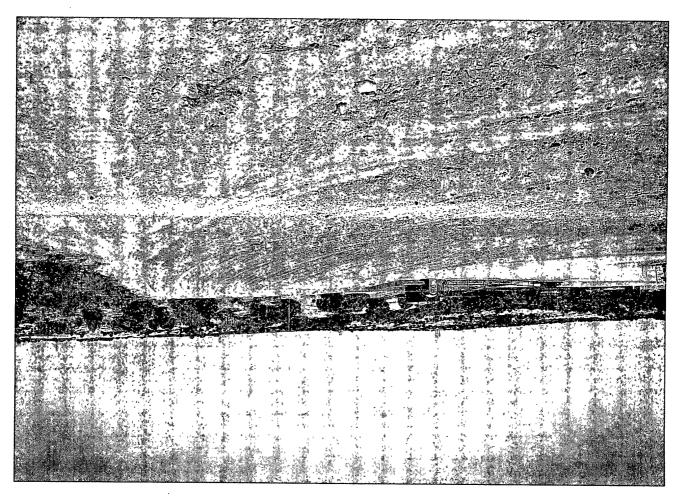

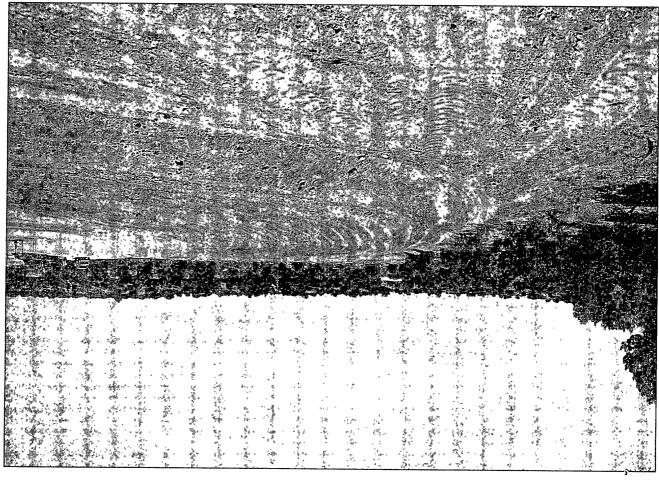

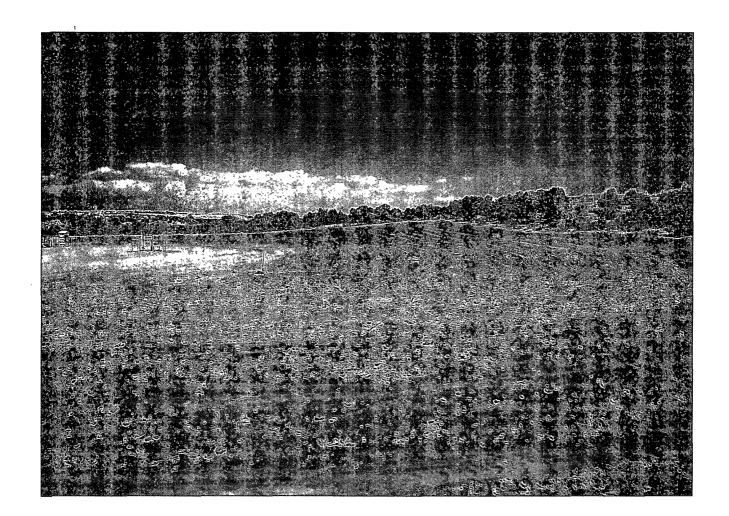



WELL PAD SAFETY AND ENVIRONMENTAL CHECK LIST

WELL NAME:	McCord B 1F				API 30-045-34200
		SAFETY	LOCATION	PICTURES	
DATE	INSPECTOR	CHECK	CHECK	TAKEN	COMMENTS
	Eric Smith	×	×	X	
2/25/2008		х	X	х	
3/5/2008	Eric Smith	x	x	x	
3/19/2008	Eric Smith				Rig on location
4/9/2008	Johnny McDonald	x	x	x	Called MVCI (Contractor) to fix tear in liner and re-key in liner. Called Brandon/ocd
4/18/2008	T. Jones	x	x	х	
	Jared Chavez	x	x	х	NW corner of fence is missing barbed wire. A few minor holes in liner. Called MVCI (Contractor) to repair the liner and fix the fence.
5/10/2008	Jared Chavez	×	x	x	Fence is missing 5' of barbed wire - called MVCI (Contractor). Blow pit has water - called Paul & Sons to remove water.
5/29/2008	Jared Chavez				Drake Well Service 24 rig is on location
6/9/2008	Jared Chavez	×	х	х	Pit & location in good condition
6/16/2008	Jared Chavez	х	х	×	Pit & location in good condition
6/23/2008	Jared Chavez	×	х	Х	Fence needs tightened. Called MVCI (Contractor) to repair the fence
7/3/2008	Jared Chavez	х	x	х	Pit & location in good condition
7/14/2008	Jared Chavez	х	х	х	Pit & location in good condition
7/28/2008					Closed Pit
	<u> </u>		L		<u> </u>