

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

FORM APPROVED
OMB NO. 1004-0137
Expires July 31, 2010

APPLICATION FOR PERMIT TO DRILL OR REENTER NOV 12 2009

1a. Type of Work <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. NANA 30014	
1b. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zones		6. If Indian, Allottee or Tribe Name	
2. Name of Operator Energen Resources Corporation		7. Unit or CA Agreement Name and No.	
3a. Address 2010 Afton Place Farmington, New Mexico 87401		8. Lease Name and Well No. Carracas 33B #12 H	
3b. Phone No. (include area code) (505)325-6800		9. API Well No. 30-039-30841	
4. Location of Well (Report location clearly and in accordance with any State requirements)* At surface 262' FSL, 392' FEL At proposed prod. zone 800' FSL, 760' FWL		10. Field and Pool, or Exploratory Basin Fruitland Coal	
14. Distance in miles and direction from nearest town or post office* 9 miles from Arboles		11. Sec., T., R., M., or Blk. and Survey or Area P Sec. 33 T 32N R 4W	
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drg. unit line, if any) 262'		12. County or Parish Rio Arriba	
16. No. of Acres in lease 2480		13. State NM	
17. Spacing Unit dedicated to this well 320 S/2			
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft. 63'		19. Proposed Depth 7966' MD	
20. BLM/BIA Bond No. on file			
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 7235' GL		22. Approximate date work will start* 04/01/2010	
23. Estimated duration 30 days			

24. Attachments

RCVD OCT 18 '10

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

OIL CONS. DIV.

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification. |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM |

DIST. 3

25. Signature <i>Stephen Byers</i>	Name (Printed/Typed) Stephen Byers	Date 11/03/2009
Title Drilling Engineer		
Approved by (Signature) <i>[Signature]</i>	Name (Printed/Typed) [Blank]	Date 11/8/2010
Title AFM		
Office FFO		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

NOTIFY AZTEC CCD 24 HRS.
PRIOR TO CASING & CEMENT

This action is subject to technical and procedural review pursuant to 43 CFR 3165.3 and appeal pursuant to 43 CFR 3165.4

DRILLING OPERATIONS AUTHORIZED ARE
SUBJECT TO COMPLIANCE WITH ATTACHED
"GENERAL REQUIREMENTS".

NOV 01 2010

NMOCD

BLM'S APPROVAL OR ACCEPTANCE OF THIS
ACTION DOES NOT RELIEVE THE LESSEE AND
OPERATOR FROM OBTAINING ANY OTHER
AUTHORIZATION REQUIRED FOR OPERATIONS
ON FEDERAL AND INDIAN LANDS

DISTRICT I
1625 N. French Dr., Hobbs, N.M. 88240

State of New Mexico
Energy, Minerals & Natural Resources Department

Form C-102
Revised October 12, 2005

DISTRICT II
1301 W. Grand Avenue, Artesia, N.M. 88210

DISTRICT III
1000 Rio Brazos Rd., Aztec, N.M. 87410

DISTRICT IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Submit to Appropriate District Office
State Lease - 4 Copies
Fee Lease - 3 Copies
Bureau of Land Management ☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

*API Number 30039.30841	*Pool Code 71629	*Pool Name Basin Fruitland Coal
*Property Code 38357	*Property Name CARRACAS 33 B	*Well Number 12
*GRID No. 162928	*Operator Name ENERGEN RESOURCES CORPORATION	*Elevation 7235'

¹⁰ Surface Location

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
P	33	32N	4W		262'	SOUTH	392'	EAST	RIO ARRIBA


¹¹ Bottom Hole Location If Different From Surface

UL or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
M	33	32N	4W		800'	SOUTH	760'	WEST	RIO ARRIBA

¹² Dedicated Acres	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.

NO ALLOWABLE WILL BE ASSIGNED TO THIS COMPLETION UNTIL ALL INTERESTS HAVE BEEN CONSOLIDATED
OR A NON-STANDARD UNIT HAS BEEN APPROVED BY THE DIVISION

16

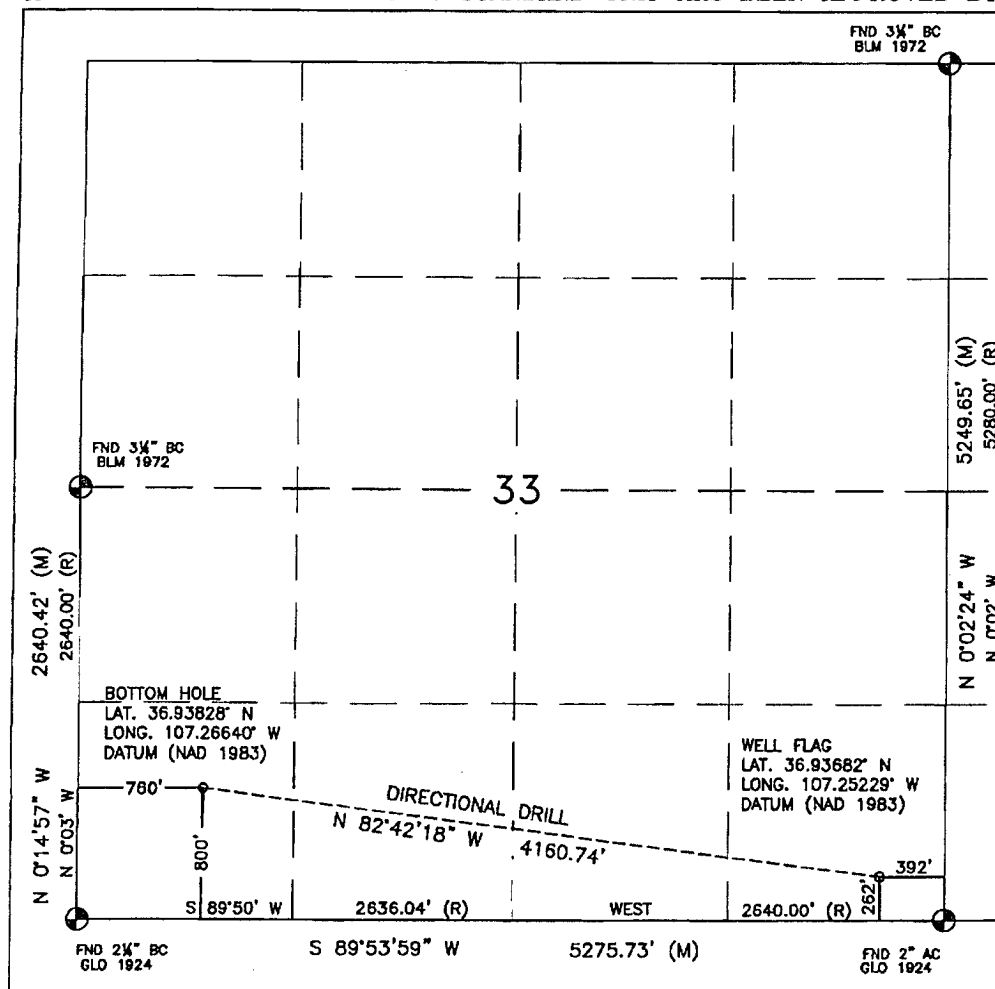

17 OPERATOR CERTIFICATION

I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or unleased mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner or a compulsory pooling order heretofore entered by the division.

Stephen Byers 11/3/09
Signature Date

Stephen Byers
Printed Name

18 SURVEYOR CERTIFICATION

I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

JULY 20, 2009

Date of Survey

Signature and Seal of Professional Surveyor:



DAVID RUSSELL

Certificate Number

10201

11/3/2009



OPERATIONS PLAN

WELL NAME.....Carracas 33B #12
JOB TYPE.....Horizontal OPE FTC
DEPT.....Drilling and Completions
PREPARED BY.....Stephen Byers

GENERAL INFORMATION

Surface Location	262 FSL 392 FEL
S-T-R	(P) Sec. 33, T32N, R04W
Bottom Hole Location	800 FSL 760 FWL
S-T-R	(L) Sec. 33, T32N, R04W
County, State	Rio Arriba, New Mexico
Elevations	7235' GL
Total Depth	7966' +/- (MD); 4065' (TVD)
Formation Objective	Basin Fruitland Coal

FORMATION TOPS

San Jose	Surface
Nacimiento	2292' (TVD)
Ojo Alamo Ss	3447' (TVD)
Kirtland Sh	3579' (TVD)
Fruitland Fm	3688' (TVD) 3712'MD
Top Target Coal	4058' (TVD) 4423'MD
Base Target Coal	4072' (TVD)
Total Depth	4065' (TVD), 7966' (MD)

DRILLING

Surface: 12-1/4" wellbore will be drilled with a fresh water mud system (spud mud).

Intermediate: 8-3/4" wellbore will be drilled with a LSND mud system. Weighting materials will be drill cuttings and if needed barite. Mud density is expected to range from 8.4 ppg to 9.0 ppg.

Production: 6-1/4" wellbore will be drilled with a fresh water or brine water system depending on reservoir characteristics. Anticipated BHP can be as high as 1100 psi.

Projected KOP is 3200' TVD with 7.02°/100' doglegs.

Blowout Control Specifications:

A 3000 psi minimum double ram or annulus BOP stack will be used following nipple up of casing head. A 2" nominal, 2000 psi minimum choke manifold will also be used. An upper Kelly Cock valve handle and drill string valve should be available to fit each drill string and be available on the rig floor during drilling operations. **Pressure test BOP to 250 psi for 15 min and 2000 psi for 15 min.**

Logging Program:

Open hole logs: None

Mudlogs: 3858' TVD, 4223' MD to TD

Surveys: Surface to KOP every 500' and a minimum of every 200' for directional.

11/3/2009

CASING, TUBING & CASING EQUIPMENT

String	Start Depth	End Depth	Wellbore	Size	Wt	Grade
Surface	0	200	12-1/4"	9-5/8"	32.3 lb/ft	H-40 ST&C
Intermediate TVD	0 0	4530 4065	8-3/4"	7"	23 lb/ft	J-55 LT&C
Prod. Liner TVD	4430 4063	7966 4065	6-1/4"	4-1/2"	11.6 lb/ft	J-55 LT&C
Tubing	0	4230	none	2-3/8"	4.7 lb/ft	J-55

Surface Casing: Texas Pattern Guide Shoe on bottom of first joint and an insert float valve on top of first joint. Casing centralization with a minimum of 3 standard bow spring centralizers to achieve optimal standoff.

Intermediate Casing: Self fill float shoe with self fill float collar on bottom and top of first joint. Casing centralization with double bow spring and centralizers to optimize standoff.

Production Liner: Bull nose guide shoe on bottom of first joint, H-Latch liner drop off tool on top of last joint.

WELLHEAD

11" 3000 x 9 5/8" weld/slip on casing head. 9 5/8" x 7" x 2 3/8" 3000 psi Flanged Wellhead .

CEMENTING

Surface Casing: 106 sks Type V with 2.0 % CaCl₂ and ¼ #/sk Flocele (15.6 ppg, 1.18 ft³/sk 148 ft³ of slurry, 100% excess to circulate to surface). WOC 12 hours. Pressure test surface casing to 750 psi for 30 min.

Intermediate Casing: Depending on wellbore conditions, cement may consist of 522 sks 65/35 with 6.0 % Bentonite, 2.0 % CaCl₂, 10 #/sk Gilsonite, and ½ #/sk Flocele (12.3 ppg, 1.93 ft³/sk) and a tail of 150 sks Class G with ¼ #/sk Flocele (15.6 ppg, 1.18 ft³/sk). (1,383 ft³ of slurry, 100% excess to circulate to surface). WOC 12 hours. Test casing to 1200 psi for 30 min.

Production Liner: NO CEMENT, Open Hole Completion

Set slips with full string weight

If cement does not circulate, run temperature survey in 8 hrs. to determine TOC.

OTHER INFORMATION

- 1) This well will be an open hole completion lined with an uncemented pre-drilled liner.
- 2) If lost circulation is encountered, sufficient LCM will be added to the mud system to maintain well control. The intermediate string may need to be cemented in multiple stages with a slurry design deviated from that listed above.
- 3) If high reservoir pressures or water flows are encountered slurry design may need to be deviated to from those listed above to satisfy wellbore and formation conditions.
- 4) No abnormal temperatures or pressures are anticipated.
- 5) This gas is dedicated.

Energen Resources

Carson National Forest Sec.33-T32N-R04W(33B #12)

Carracas Mesa

Carracas 33B #12

Horizontal OPE FTC

Plan: Preliminary Plan #1


DIRECTIONAL PLAN

03 November, 2009

10

SECTION DETAILS

Sec	MD	Inc	Azi	TVD	+N-S	+E-W	DLeg	TFace	VSec	Target
1	0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.0	
2	3200.0	0.00	0.00	3200.0	0.0	0.0	0.00	0.00	0.0	KOP
3	3214.8	0.98	97.42	3214.8	0.0	0.1	6.62	97.42	-0.1	
4	3235.5	0.98	97.42	3235.4	-0.1	0.5	0.00	0.00	-0.5	
5	4530.6	90.00	277.43	4065.0	-105.4	-808.2	7.02	-179.99	787.8	Land Curve
6	7966.8	90.00	240.61	4065.0	-538.0	-4123.7	1.07	-90.00	4158.7	TD Lateral

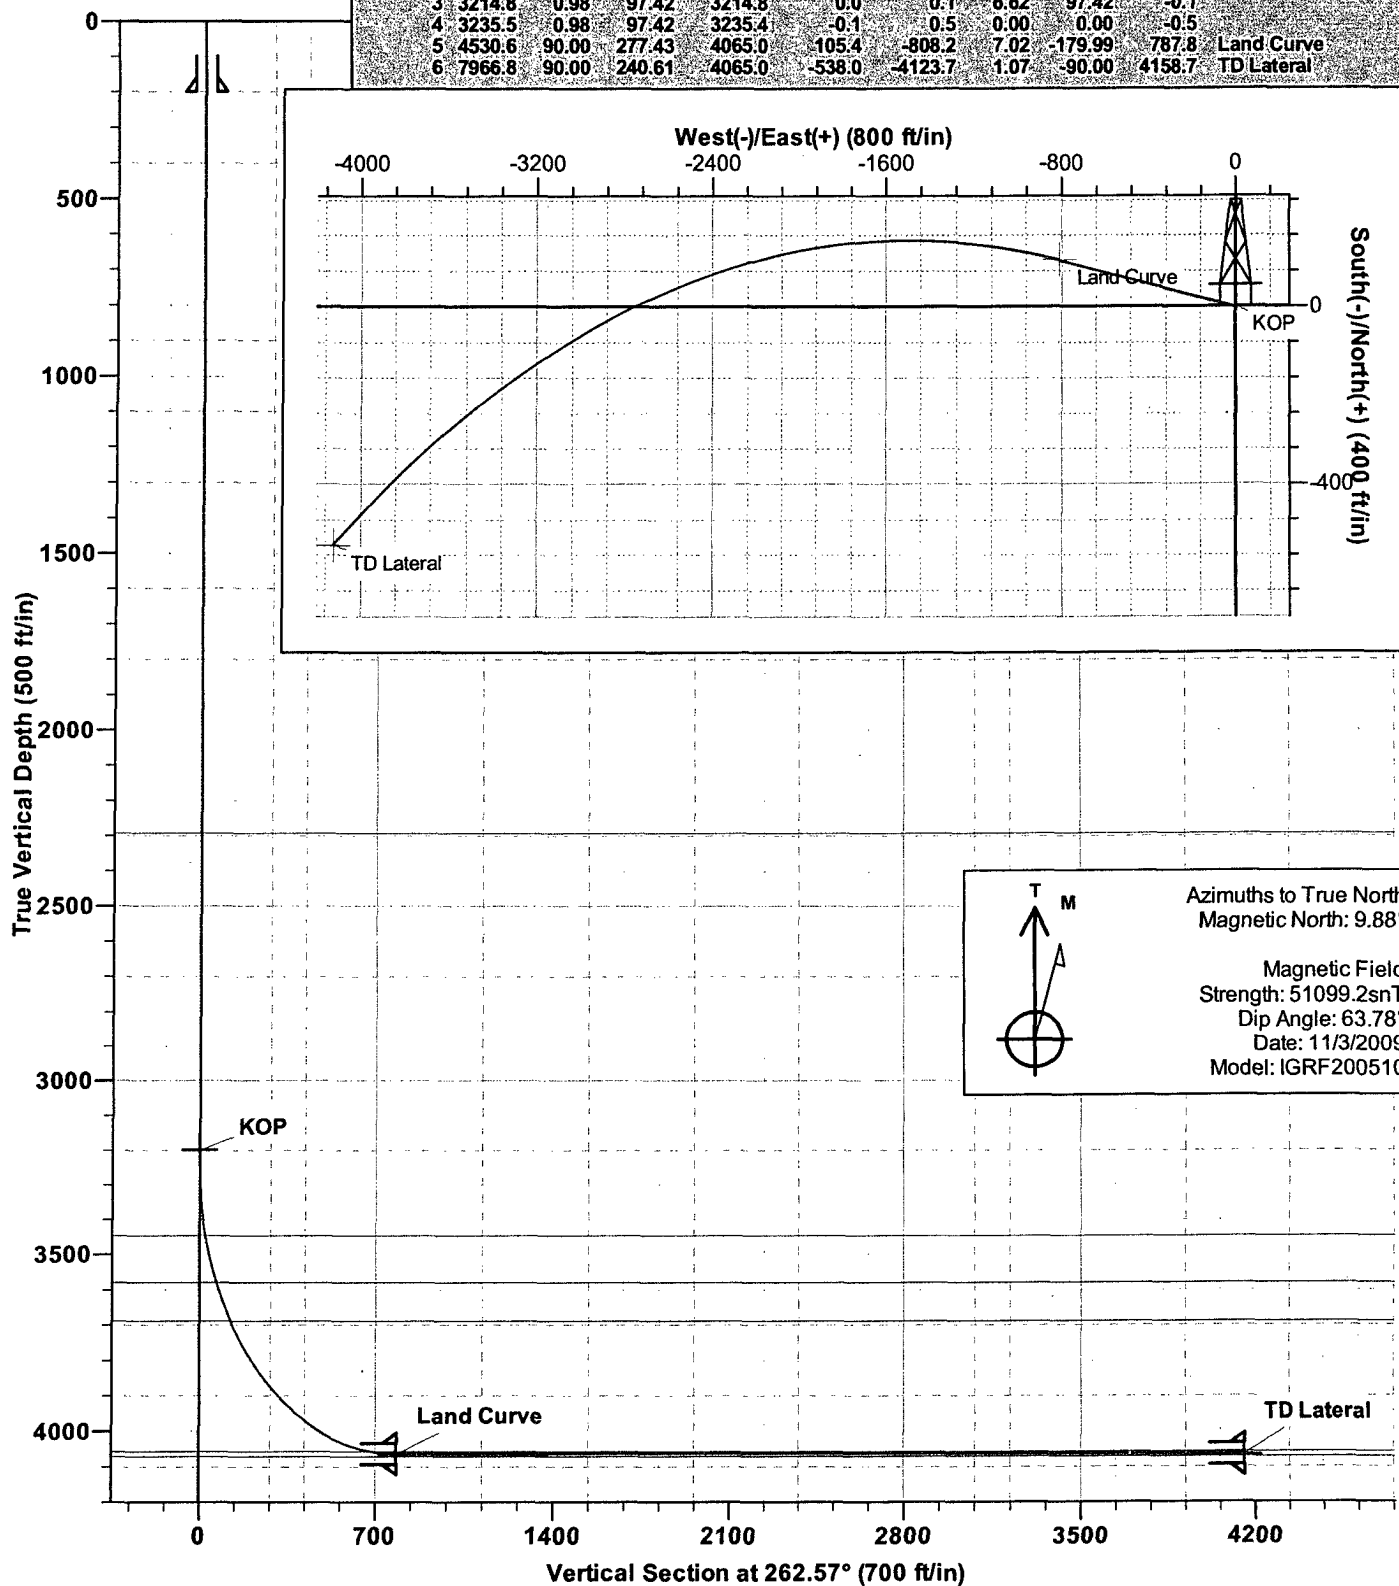

Energen DIRECTIONAL PLAN

Company:	Energen Resources	Local Co-ordinate Reference:	Well Carracas 33B #12
Project:	Carson National Forest Sec.33-T32N-R04W(33B	TVD Reference:	KB @ 7248.0ft (KB)
Site:	Carracas Mesa	MD Reference:	KB @ 7248.0ft (KB)
Well:	Carracas 33B #12	North Reference:	True
Wellbore:	Horizontal OPE FTC	Survey Calculation Method:	Minimum Curvature
Design:	Preliminary Plan #1	Database:	EDM 2003.16 Single User Db

Project Carson National Forest Sec.33-T32N-R04W(33B #12)

Map System:	US State Plane 1983	System Datum:	Mean Sea Level
Geo Datum:	North American Datum 1983		
Map Zone:	New Mexico Central Zone		

Site Carracas Mesa

Site Position:		Northing:	2,161,834.83 ft	Latitude:	36° 56' 12.552 N
From:	Lat/Long	Easting:	1,347,498.56 ft	Longitude:	107° 15' 8.244 W
Position Uncertainty:	0.0 ft	Slot Radius:	"	Grid Convergence:	-0.60 °

Well Carracas 33B #12

Well Position	+N/-S	0.0 ft	Northing:	2,161,834.83 ft	Latitude:	36° 56' 12.552 N
	+E/-W	0.0 ft	Easting:	1,347,498.56 ft	Longitude:	107° 15' 8.244 W
Position Uncertainty		0.0 ft	Wellhead Elevation:	7,233.0 ft	Ground Level:	7,233.0 ft

Wellbore Horizontal OPE FTC

Magnetics	Model Name	Sample Date	Declination (°)	Dip Angle (°)	Field Strength (nT)
	IGRF200510	11/3/2009	9.88	63.78	51,099

Design Preliminary Plan #1

Audit Notes:

Version:		Phase:	PROTOTYPE	Tie On Depth:	0.0
-----------------	--	---------------	-----------	----------------------	-----

Vertical Section:	Depth From (TVD) (ft)	+N/-S (ft)	+E/-W (ft)	Direction (°)
	0.0	0.0	0.0	262.57

Survey Tool Program Date 11/3/2009

From (ft)	To (ft)	Survey (Wellbore)	Tool Name	Description
0.0	7,966.8	Preliminary Plan #1 (Horizontal OPE FTC)	MWD	MWD - Standard

Planned Survey

MD (ft)	TVD (ft)	Inc (°)	Azi (°)	Build ("/100ft)	N/S (ft)	E/W (ft)	V. Sec (ft)
0.0	0.0	0.00	0.00	0.00	0.0	0.0	0.0
100.0	100.0	0.00	0.00	0.00	0.0	0.0	0.0
200.0	200.0	0.00	0.00	0.00	0.0	0.0	0.0
300.0	300.0	0.00	0.00	0.00	0.0	0.0	0.0
400.0	400.0	0.00	0.00	0.00	0.0	0.0	0.0
500.0	500.0	0.00	0.00	0.00	0.0	0.0	0.0
600.0	600.0	0.00	0.00	0.00	0.0	0.0	0.0
700.0	700.0	0.00	0.00	0.00	0.0	0.0	0.0
800.0	800.0	0.00	0.00	0.00	0.0	0.0	0.0
900.0	900.0	0.00	0.00	0.00	0.0	0.0	0.0
1,000.0	1,000.0	0.00	0.00	0.00	0.0	0.0	0.0
1,100.0	1,100.0	0.00	0.00	0.00	0.0	0.0	0.0

Energen DIRECTIONAL PLAN

Company: Energen Resources
Project: Carson National Forest Sec.33-T32N-R04W(33B)
Site: Carracas Mesa
Well: Carracas 33B #12
Wellbore: Horizontal OPE FTC
Design: Preliminary Plan #1

Local Co-ordinate Reference: Well Carracas 33B #12
TVD Reference: KB @ 7248.0ft (KB)
MD Reference: KB @ 7248.0ft (KB)
North Reference: True
Survey Calculation Method: Minimum Curvature
Database: EDM 2003.16 Single User Db

Planned Survey

MD (ft)	TVD (ft)	Inc (°)	Azi (°)	Build (°/100ft)	N/S (ft)	E/W (ft)	V. Sec (ft)
3,900.0	3,833.2	45.70	277.43	7.02	31.7	-243.4	237.2
3,950.0	3,867.0	49.22	277.43	7.02	36.5	-279.9	272.8
4,000.0	3,898.4	52.73	277.43	7.02	41.5	-318.4	310.4
4,050.0	3,927.5	56.24	277.43	7.02	46.8	-358.8	349.7
4,100.0	3,954.0	59.75	277.43	7.02	52.3	-400.8	390.7
4,150.0	3,977.8	63.27	277.43	7.02	58.0	-444.4	433.1
4,200.0	3,998.9	66.78	277.43	7.02	63.8	-489.3	476.9
4,250.0	4,017.2	70.29	277.43	7.02	69.8	-535.4	521.9
4,300.0	4,032.6	73.80	277.43	7.02	76.0	-582.6	567.9
4,350.0	4,045.1	77.32	277.43	7.02	82.2	-630.6	614.7
4,400.0	4,054.6	80.83	277.43	7.02	88.6	-679.3	662.1
4,423.6	4,058.0	82.49	277.43	7.02	91.6	-702.5	684.7
Top Target Coal							
4,450.0	4,061.0	84.34	277.43	7.02	95.0	-728.4	710.0
4,500.0	4,064.4	87.85	277.43	7.02	101.4	-777.9	758.2
4,530.6	4,065.0	90.00	277.43	7.02	105.4	-808.2	787.8
Land Curve							
4,600.0	4,065.0	90.00	276.69	0.00	113.9	-877.1	855.0
4,700.0	4,065.0	90.00	275.61	0.00	124.6	-976.5	952.2
4,800.0	4,065.0	90.00	274.54	0.00	133.5	-1,076.1	1,049.8
4,900.0	4,065.0	90.00	273.47	0.00	140.5	-1,175.9	1,147.8
5,000.0	4,065.0	90.00	272.40	0.00	145.6	-1,275.8	1,246.2
5,100.0	4,065.0	90.00	271.33	0.00	148.9	-1,375.7	1,344.9
5,200.0	4,065.0	90.00	270.26	0.00	150.2	-1,475.7	1,443.9
5,300.0	4,065.0	90.00	269.18	0.00	149.7	-1,575.7	1,543.1
5,400.0	4,065.0	90.00	268.11	0.00	147.4	-1,675.7	1,642.5
5,500.0	4,065.0	90.00	267.04	0.00	143.2	-1,775.6	1,742.1
5,600.0	4,065.0	90.00	265.97	0.00	137.1	-1,875.4	1,841.9
5,700.0	4,065.0	90.00	264.90	0.00	129.1	-1,975.1	1,941.8
5,800.0	4,065.0	90.00	263.83	0.00	119.3	-2,074.6	2,041.7
5,900.0	4,065.0	90.00	262.75	0.00	107.6	-2,173.9	2,141.7
6,000.0	4,065.0	90.00	261.68	0.00	94.1	-2,273.0	2,241.7
6,100.0	4,065.0	90.00	260.61	0.00	78.7	-2,371.8	2,341.7
6,200.0	4,065.0	90.00	259.54	0.00	61.4	-2,470.3	2,441.6
6,300.0	4,065.0	90.00	258.47	0.00	42.4	-2,568.4	2,541.4
6,400.0	4,065.0	90.00	257.40	0.00	21.5	-2,666.2	2,641.0
6,500.0	4,065.0	90.00	256.32	0.00	-1.3	-2,763.6	2,740.5
6,600.0	4,065.0	90.00	255.25	0.00	-25.8	-2,860.5	2,839.8
6,700.0	4,065.0	90.00	254.18	0.00	-52.2	-2,957.0	2,938.9
6,800.0	4,065.0	90.00	253.11	0.00	-80.3	-3,053.0	3,037.7
6,900.0	4,065.0	90.00	252.04	0.00	-110.3	-3,148.4	3,136.2
7,000.0	4,065.0	90.00	250.97	0.00	-142.0	-3,243.2	3,234.3
7,100.0	4,065.0	90.00	249.89	0.00	-175.5	-3,337.4	3,332.1
7,200.0	4,065.0	90.00	248.82	0.00	-210.8	-3,431.0	3,429.4
7,300.0	4,065.0	90.00	247.75	0.00	-247.8	-3,523.9	3,526.3

Energen DIRECTIONAL PLAN

Company:	Energen Resources	Local Co-ordinate Reference:	Well Carracas 33B #12
Project:	Carson National Forest Sec.33-T32N-R04W(33B)	TVD Reference:	KB @ 7248.0ft (KB)
Site:	Carracas Mesa	MD Reference:	KB @ 7248.0ft (KB)
Well:	Carracas 33B #12	North Reference:	True
Wellbore:	Horizontal OPE FTC	Survey Calculation Method:	Minimum Curvature
Design:	Preliminary Plan #1	Database:	EDM 2003.16 Single User Db

Planned Survey

MD (ft)	TVD (ft)	Inc (°)	Azi (°)	Build (°/100ft)	N/S (ft)	E/W (ft)	V. Sec (ft)
7,400.0	4,065.0	90.00	246.68	0.00	-286.5	-3,616.1	3,622.8
7,500.0	4,065.0	90.00	245.61	0.00	-326.9	-3,707.6	3,718.7
7,600.0	4,065.0	90.00	244.54	0.00	-369.1	-3,798.2	3,814.1
7,700.0	4,065.0	90.00	243.46	0.00	-412.9	-3,888.1	3,908.9
7,800.0	4,065.0	90.00	242.39	0.00	-458.4	-3,977.2	4,003.0
7,900.0	4,065.0	90.00	241.32	0.00	-505.6	-4,065.3	4,096.6
7,966.8	4,065.0	90.00	240.61	0.00	-538.0	-4,123.7	4,158.7

TD Lateral

Targets

Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (ft)	+N/-S (ft)	+E/-W (ft)	Northing (ft)	Easting (ft)	Latitude	Longitude
TD Lateral - plan hits target - Point	0.00	0.00	4,065.0	-538.0	-4,123.7	2,161,340.21	1,343,369.40	36° 56' 7.230 N	107° 15' 59.036 W
Land Curve - plan hits target - Point	0.00	0.00	4,065.0	105.4	-808.2	2,161,948.72	1,346,691.51	36° 56' 13.594 N	107° 15' 18.199 W
KOP - plan hits target - Point	0.00	0.00	3,200.0	0.0	0.0	2,161,834.83	1,347,498.56	36° 56' 12.552 N	107° 15' 8.244 W

Casing Points


Measured Depth (ft)	Vertical Depth (ft)	Name	Casing Diameter (")	Hole Diameter (")
200.0	200.0	Surface	9-5/8	12-1/4
4,530.0	4,065.0	Intermediate	7	8-3/4
7,966.0	4,065.0	Liner	4-1/2	6-1/4

Formations

Measured Depth (ft)	Vertical Depth (ft)	Name	Lithology	Dip (°)	Dip Direction (°)
2,292.0	2,292.0	Nacimiento		0.00	
3,588.7	3,579.0	Kirtland Sh		0.00	
3,712.5	3,688.0	Fruitland Fm		0.00	
3,449.0	3,447.0	Ojo Alamo SS		0.00	
	4,072.0	Base Target Coal		0.00	
4,423.6	4,058.0	Top Target Coal		0.00	

Checked By: _____	Approved By: _____	Date: _____
-------------------	--------------------	-------------

Energen Resources Corporation
Typical 2000 psi Choke Manifold Configuration

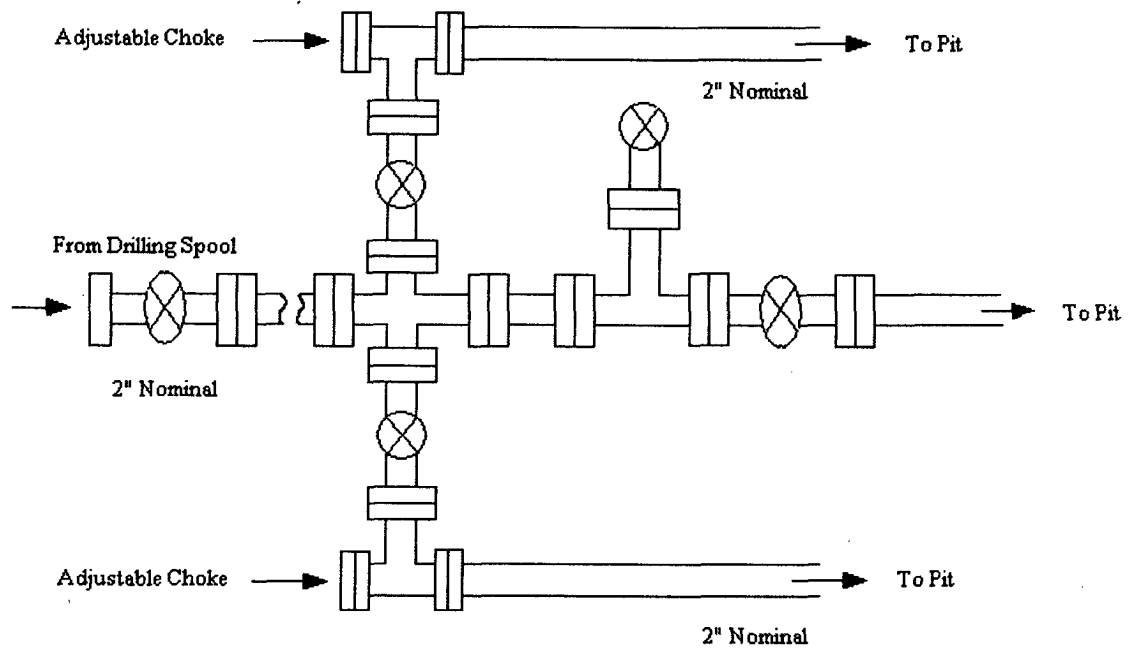

Choke manifold installed from surface to TD

Energen Resources Corporation

Typical BOP Configuration for Gas Drilling

