

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy Minerals and Natural Resources
Department
Oil Conservation Division
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-144
July 21, 2008

For temporary pits, closed-loop systems, and below-grade tanks, submit to the appropriate NMOCD District Office.
For permanent pits and exceptions submit to the Santa Fe Environmental Bureau office and provide a copy to the appropriate NMOCD District Office.

3153

Pit, Closed-Loop System, Below-Grade Tank, or
Proposed Alternative Method Permit or Closure Plan Application

- Type of action: ☒ Permit of a pit, closed-loop system, below-grade tank, or proposed alternative method
☐ Closure of a pit, closed-loop system, below-grade tank, or proposed alternative method
☐ Modification to an existing permit
☐ Closure plan only submitted for an existing permitted or non-permitted pit, closed-loop system, below-grade tank, or proposed alternative method

Instructions: Please submit one application (Form C-144) per individual pit, closed-loop system, below-grade tank or alternative request

Please be advised that approval of this request does not relieve the operator of liability should operations result in pollution of surface water, ground water or the environment. Nor does approval relieve the operator of its responsibility to comply with any other applicable governmental authority's rules, regulations or ordinances.


1.
Operator: SG Interests I Ltd. OGRID #: 020572
Address: PO Box 2677, Durango, CO 81302
Facility or well name: Navajo 21-6-27 #3
API Number: 30-043-21048 OCD Permit Number: _____
U/L or Qtr/Qtr K Section 27 Township 21N Range 6W County: Sandoval
Center of Proposed Design: Latitude 36.01883°N Longitude -107.46044°W NAD: ☒ 1927 ☐ 1983
Surface Owner: ☐ Federal ☐ State ☐ Private ☒ Tribal Trust or Indian Allotment

2.
☒ **Pit:** Subsection F or G of 19.15.17.11 NMAC
Temporary: ☒ Drilling ☐ Workover
☐ Permanent ☐ Emergency ☐ Cavitation ☐ P&A
☒ Lined ☐ Unlined Liner type: Thickness 20 mil ☒ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
☐ String-Reinforced
Liner Seams: ☐ Welded ☒ Factory ☐ Other _____ Volume: 2271 Bbls Dimensions: L 75' x W 10' x D 10'

3.
☐ **Closed-loop System:** Subsection H of 19.15.17.11 NMAC
Type of Operation: ☐ P&A ☐ Drilling a new well ☐ Workover or Drilling (Applies to activities which require prior approval of a permit or notice of intent)
☐ Drying Pad ☐ Above Ground Steel Tanks ☐ Haul-off Bins ☐ Other _____
☐ Lined ☐ Unlined Liner type: Thickness _____ mil ☐ LLDPE ☐ HDPE ☐ PVC ☐ Other _____
Liner Seams: ☐ Welded ☐ Factory ☐ Other _____

4.
☐ **Below-grade tank:** Subsection I of 19.15.17.11 NMAC
Volume: _____ bbl Type of fluid: _____
Tank Construction material: _____
☐ Secondary containment with leak detection ☐ Visible sidewalls, liner, 6-inch lift and automatic overflow shut-off
☐ Visible sidewalls and liner ☐ Visible sidewalls only ☐ Other _____
Liner type: Thickness _____ mil ☐ HDPE ☐ PVC ☐ Other _____

5.
☐ **Alternative Method:**
Submittal of an exception request is required. Exceptions must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.



6.

Fencing: Subsection D of 19.15.17.11 NMAC (*Applies to permanent pits, temporary pits, and below-grade tanks*)

- ☐ Chain link, six feet in height, two strands of barbed wire at top (*Required if located within 1000 feet of a permanent residence, school, hospital, institution or church*)
- ☐ Four foot height, four strands of barbed wire evenly spaced between one and four feet
- ☒ Alternate. Please specify 4' high hog wire with 1 strand of barbed wire on top

7.

Netting: Subsection E of 19.15.17.11 NMAC (*Applies to permanent pits and permanent open top tanks*)

- ☐ Screen ☐ Netting ☐ Other _____
- ☐ Monthly inspections (If netting or screening is not physically feasible)

8.

Signs: Subsection C of 19.15.17.11 NMAC

- ☐ 12"x 24", 2" lettering, providing Operator's name, site location, and emergency telephone numbers
- ☒ Signed in compliance with 19.15.3.103 NMAC

9.

Administrative Approvals and Exceptions:

Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17 NMAC for guidance.

Please check a box if one or more of the following is requested, if not leave blank:

- ☒ Administrative approval(s): Requests must be submitted to the appropriate division district or the Santa Fe Environmental Bureau office for consideration of approval.
- ☐ Exception(s): Requests must be submitted to the Santa Fe Environmental Bureau office for consideration of approval.

10.

Siting Criteria (regarding permitting): 19.15.17.10 NMAC

Instructions: The applicant must demonstrate compliance for each siting criteria below in the application. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Applicant must attach justification for request. Please refer to 19.15.17.10 NMAC for guidance. Siting criteria does not apply to drying pads or above-grade tanks associated with a closed-loop system.

Ground water is less than 50 feet below the bottom of the temporary pit, permanent pit, or below-grade tank. - NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark). - Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to temporary, emergency, or cavitation pits and below-grade tanks) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No <input type="checkbox"/> NA
Within 1000 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application. (Applies to permanent pits) - Visual inspection (certification) of the proposed site; Aerial photo; Satellite image	<input type="checkbox"/> Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> NA
Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application. - NM Office of the State Engineer - iWATERS database search; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended. - Written confirmation or verification from the municipality; Written approval obtained from the municipality	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within 500 feet of a wetland. - US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within the area overlying a subsurface mine. - Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within an unstable area. - Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Within a 100-year floodplain. - FEMA map	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

11.

Temporary Pits, Emergency Pits, and Below-grade Tanks Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☒ Hydrogeologic Report (Below-grade Tanks) - based upon the requirements of Paragraph (4) of Subsection B of 19.15.17.9 NMAC
- ☒ Hydrogeologic Data (Temporary and Emergency Pits) - based upon the requirements of Paragraph (2) of Subsection B of 19.15.17.9 NMAC
- ☒ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☒ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☒ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☒ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

☒ Previously Approved Design (attach copy of design) API Number: 30-043-21062 or Permit Number: _____

12.

Closed-loop Systems Permit Application Attachment Checklist: Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Geologic and Hydrogeologic Data (only for on-site closure) - based upon the requirements of Paragraph (3) of Subsection B of 19.15.17.9
- ☐ Siting Criteria Compliance Demonstrations (only for on-site closure) - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☐ Design Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☐ Closure Plan (Please complete Boxes 14 through 18, if applicable) - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

☐ Previously Approved Design (attach copy of design) API Number: _____

☐ Previously Approved Operating and Maintenance Plan API Number: _____ (Applies only to closed-loop system that use above ground steel tanks or haul-off bins and propose to implement waste removal for closure)

13.

Permanent Pits Permit Application Checklist: Subsection B of 19.15.17.9 NMAC**Instructions:** Each of the following items must be attached to the application. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Hydrogeologic Report - based upon the requirements of Paragraph (1) of Subsection B of 19.15.17.9 NMAC
- ☐ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC
- ☐ Climatological Factors Assessment
- ☐ Certified Engineering Design Plans - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Dike Protection and Structural Integrity Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Leak Detection Design - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Liner Specifications and Compatibility Assessment - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Quality Control/Quality Assurance Construction and Installation Plan
- ☐ Operating and Maintenance Plan - based upon the appropriate requirements of 19.15.17.12 NMAC
- ☐ Freeboard and Overtopping Prevention Plan - based upon the appropriate requirements of 19.15.17.11 NMAC
- ☐ Nuisance or Hazardous Odors, including H₂S, Prevention Plan
- ☐ Emergency Response Plan
- ☐ Oil Field Waste Stream Characterization
- ☐ Monitoring and Inspection Plan
- ☐ Erosion Control Plan
- ☐ Closure Plan - based upon the appropriate requirements of Subsection C of 19.15.17.9 NMAC and 19.15.17.13 NMAC

14.

Proposed Closure: 19.15.17.13 NMAC**Instructions:** Please complete the applicable boxes, Boxes 14 through 18, in regards to the proposed closure plan.

Type: ☒ Drilling ☐ Workover ☐ Emergency ☐ Cavitation ☐ P&A ☐ Permanent Pit ☐ Below-grade Tank ☐ Closed-loop System

☐ Alternative

Proposed Closure Method: ☐ Waste Excavation and Removal

☐ Waste Removal (Closed-loop systems only)

☒ On-site Closure Method (Only for temporary pits and closed-loop systems)

☐ In-place Burial ☐ On-site Trench Burial

☐ Alternative Closure Method (Exceptions must be submitted to the Santa Fe Environmental Bureau for consideration)

15.

Waste Excavation and Removal Closure Plan Checklist: (19.15.17.13 NMAC) **Instructions:** Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.

- ☐ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC
- ☐ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC
- ☐ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings)
- ☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC
- ☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC
- ☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

16.

Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only: (19.15.17.13.D NMAC)**Instructions: Please identify the facility or facilities for the disposal of liquids, drilling fluids and drill cuttings. Use attachment if more than two facilities are required.**

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Will any of the proposed closed-loop system operations and associated activities occur on or in areas that *will not* be used for future service and operations?☐ Yes (If yes, please provide the information below) ☐ No**Required for impacted areas which will not be used for future service and operations:**☐ Soil Backfill and Cover Design Specifications - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC☐ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC☐ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

17.

Siting Criteria (regarding on-site closure methods only): 19.15.17.10 NMAC**Instructions: Each siting criteria requires a demonstration of compliance in the closure plan. Recommendations of acceptable source material are provided below. Requests regarding changes to certain siting criteria may require administrative approval from the appropriate district office or may be considered an exception which must be submitted to the Santa Fe Environmental Bureau office for consideration of approval. Justifications and/or demonstrations of equivalency are required. Please refer to 19.15.17.10 NMAC for guidance.**

Ground water is less than 50 feet below the bottom of the buried waste.

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☒ No
☐ NA

Ground water is between 50 and 100 feet below the bottom of the buried waste

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☐ Yes ☒ No
☐ NA

Ground water is more than 100 feet below the bottom of the buried waste.

- NM Office of the State Engineer - iWATERS database search; USGS; Data obtained from nearby wells

☒ Yes ☐ No
☐ NA

Within 300 feet of a continuously flowing watercourse, or 200 feet of any other significant watercourse or lakebed, sinkhole, or playa lake (measured from the ordinary high-water mark).

- Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☒ No

Within 300 feet from a permanent residence, school, hospital, institution, or church in existence at the time of initial application.

- Visual inspection (certification) of the proposed site; Aerial photo; Satellite image

☐ Yes ☒ No

Within 500 horizontal feet of a private, domestic fresh water well or spring that less than five households use for domestic or stock watering purposes, or within 1000 horizontal feet of any other fresh water well or spring, in existence at the time of initial application.

- NM Office of the State Engineer - iWATERS database; Visual inspection (certification) of the proposed site

☐ Yes ☒ No

Within incorporated municipal boundaries or within a defined municipal fresh water well field covered under a municipal ordinance adopted pursuant to NMSA 1978, Section 3-27-3, as amended.

- Written confirmation or verification from the municipality; Written approval obtained from the municipality

☐ Yes ☒ No

Within 500 feet of a wetland.

- US Fish and Wildlife Wetland Identification map; Topographic map; Visual inspection (certification) of the proposed site

☐ Yes ☒ No

Within the area overlying a subsurface mine.

- Written confirmation or verification or map from the NM EMNRD-Mining and Mineral Division

☐ Yes ☒ No

Within an unstable area.

- Engineering measures incorporated into the design; NM Bureau of Geology & Mineral Resources; USGS; NM Geological Society; Topographic map

☐ Yes ☒ No

Within a 100-year floodplain.

- FEMA map

☐ Yes ☒ No

18.

On-Site Closure Plan Checklist: (19.15.17.13 NMAC) Instructions: Each of the following items must be attached to the closure plan. Please indicate, by a check mark in the box, that the documents are attached.☒ Siting Criteria Compliance Demonstrations - based upon the appropriate requirements of 19.15.17.10 NMAC☒ Proof of Surface Owner Notice - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC☐ Construction/Design Plan of Burial Trench (if applicable) based upon the appropriate requirements of 19.15.17.11 NMAC☒ Construction/Design Plan of Temporary Pit (for in-place burial of a drying pad) - based upon the appropriate requirements of 19.15.17.11 NMAC☒ Protocols and Procedures - based upon the appropriate requirements of 19.15.17.13 NMAC☒ Confirmation Sampling Plan (if applicable) - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC☐ Waste Material Sampling Plan - based upon the appropriate requirements of Subsection F of 19.15.17.13 NMAC☒ Disposal Facility Name and Permit Number (for liquids, drilling fluids and drill cuttings or in case on-site closure standards cannot be achieved)☒ Soil Cover Design - based upon the appropriate requirements of Subsection H of 19.15.17.13 NMAC☒ Re-vegetation Plan - based upon the appropriate requirements of Subsection I of 19.15.17.13 NMAC☒ Site Reclamation Plan - based upon the appropriate requirements of Subsection G of 19.15.17.13 NMAC

19.

Operator Application Certification:

I hereby certify that the information submitted with this application is true, accurate and complete to the best of my knowledge and belief.

Name (Print): William Schwab III Title: Registered Agent for SG Interests I, Ltd.

Signature: [Signature] Date: February 13, 2009

e-mail address: tripp@nikaenergy.com Telephone: 970-259-2701

20.

OCD Approval: ☒ Permit Application (including closure plan) ☐ Closure Plan (only) ☐ OCD Conditions (see attachment)

OCD Representative Signature: [Signature] Approval Date: 12-3-10

Title: Enviro Spec OCD Permit Number: _____

21.

Closure Report (required within 60 days of closure completion): Subsection K of 19.15.17.13 NMAC

Instructions: Operators are required to obtain an approved closure plan prior to implementing any closure activities and submitting the closure report. The closure report is required to be submitted to the division within 60 days of the completion of the closure activities. Please do not complete this section of the form until an approved closure plan has been obtained and the closure activities have been completed.

☒ Closure Completion Date: 10/31/2008

22.

Closure Method:

☐ Waste Excavation and Removal ☒ On-Site Closure Method ☐ Alternative Closure Method ☐ Waste Removal (Closed-loop systems only)
☐ If different from approved plan, please explain.

23.

Closure Report Regarding Waste Removal Closure For Closed-loop Systems That Utilize Above Ground Steel Tanks or Haul-off Bins Only:

Instructions: Please indentify the facility or facilities for where the liquids, drilling fluids and drill cuttings were disposed. Use attachment if more than two facilities were utilized.

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Disposal Facility Name: _____ Disposal Facility Permit Number: _____

Were the closed-loop system operations and associated activities performed on or in areas that *will not* be used for future service and operations?

☐ Yes (If yes, please demonstrate compliance to the items below) ☐ No

Required for impacted areas which will not be used for future service and operations:

- ☐ Site Reclamation (Photo Documentation)
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique

24.

Closure Report Attachment Checklist: *Instructions: Each of the following items must be attached to the closure report. Please indicate, by a check mark in the box, that the documents are attached.*

- ☐ Proof of Closure Notice (surface owner and division)
☐ Proof of Deed Notice (required for on-site closure)
☐ Plot Plan (for on-site closures and temporary pits)
☐ Confirmation Sampling Analytical Results (if applicable)
☐ Waste Material Sampling Analytical Results (required for on-site closure)
☐ Disposal Facility Name and Permit Number
☐ Soil Backfilling and Cover Installation
☐ Re-vegetation Application Rates and Seeding Technique
☐ Site Reclamation (Photo Documentation)

On-site Closure Location: Latitude _____ Longitude _____ NAD: ☐ 1927 ☐ 1983

25.

Operator Closure Certification:

I hereby certify that the information and attachments submitted with this closure report is true, accurate and complete to the best of my knowledge and belief. I also certify that the closure complies with all applicable closure requirements and conditions specified in the approved closure plan.

Name (Print): _____ Title: _____

Signature: _____ Date: _____

e-mail address: _____ Telephone: _____

ADMINISTRATIVE APPROVAL REQUEST

RE: Navajo 21-6-27 #3 Temporary Drilling Pit Design

SGI is requesting administrative approval for the current pit design as applied for and approved by BLM and NMOCD under the current Federal APD. This design and APD was applied for prior (August 2007) to the new pit rule effective date but was approved post effective date. Navajo Permits can take more time than other APD's.

The design submitted is the same design used to drill all previous wells in this area without incident negatively affecting the Environment, the Health and Welfare of the surrounding residents, and the employees and contractors of SGI.

The request is for a variance concerning the rise to run slope of the pit walls. The current pit was designed with a 2' rise to 1' run in order to reduce the footprint of the drilling pad as requested by the BLM. All other new temporary drilling pit design criteria will be followed.

A 10'W x 10'H x 75'L pit with 1'H:2'V walls has a 2,271 Bbl capacity full. Subtracting a 2' freeboard there is a 1,676 Bbl capacity. This is 678 Bbls or 68% additional capacity of the 1000 Bbls needed to drill this well.

To address the issue of egress from the pit in case of an accidental ingress, a rope ladder will be installed. The rope ladder will be anchored at the surface outside the pit liner anchor ditch and will extend to the bottom of the pit. This will allow any personnel to escape from the pit. Please note: In the several years we have worked in the industry (30+ years) we have never seen or heard of any accidental fatalities concerning drowning in reserve pits.

New Mexico Office of the State Engineer
POD Reports and Downloads

Township: 21N Range: 06W Sections: 21,22,23,28,27,26,33,34,35

NAD27 X: Y: Zone: Search Radius:

County: Basin: Number: Suffix:

Owner Name: (First) (Last) ☐ Non-Domestic ☐ Domestic ☒ All

POD / Surface Data Report

Avg Depth to Water Report

Water Column Report

Clear Form

iWATERS Menu

Help

WATER COLUMN REPORT 02/12/2009

(quarters are 1=NW 2=NE 3=SW 4=SE)
(quarters are biggest to smallest)

POD Number	Tw	Rng	Sec	q	q	Zone	X	Y	Depth Well	Depth Water	Water (in feet) Column
------------	----	-----	-----	---	---	------	---	---	---------------	----------------	---------------------------

No Records found, try again

New Mexico Office of the State Engineer
POD Reports and Downloads

Township: 21N Range: 06W Sections: 21,22,23,28,27,26,33,34,35

NAD27 X: Y: Zone: Search Radius:

County: Basin: Number: Suffix:

Owner Name: (First) (Last) ☐ Non-Domestic ☐ Domestic ☒ All

POD / Surface Data Report

Avg Depth to Water Report

Water Column Report

Clear Form


iWATERS Menu

Help

AVERAGE DEPTH OF WATER REPORT 02/12/2009

Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	(Depth Water in Feet)		
								Min	Max	Avg

No Records found, try again

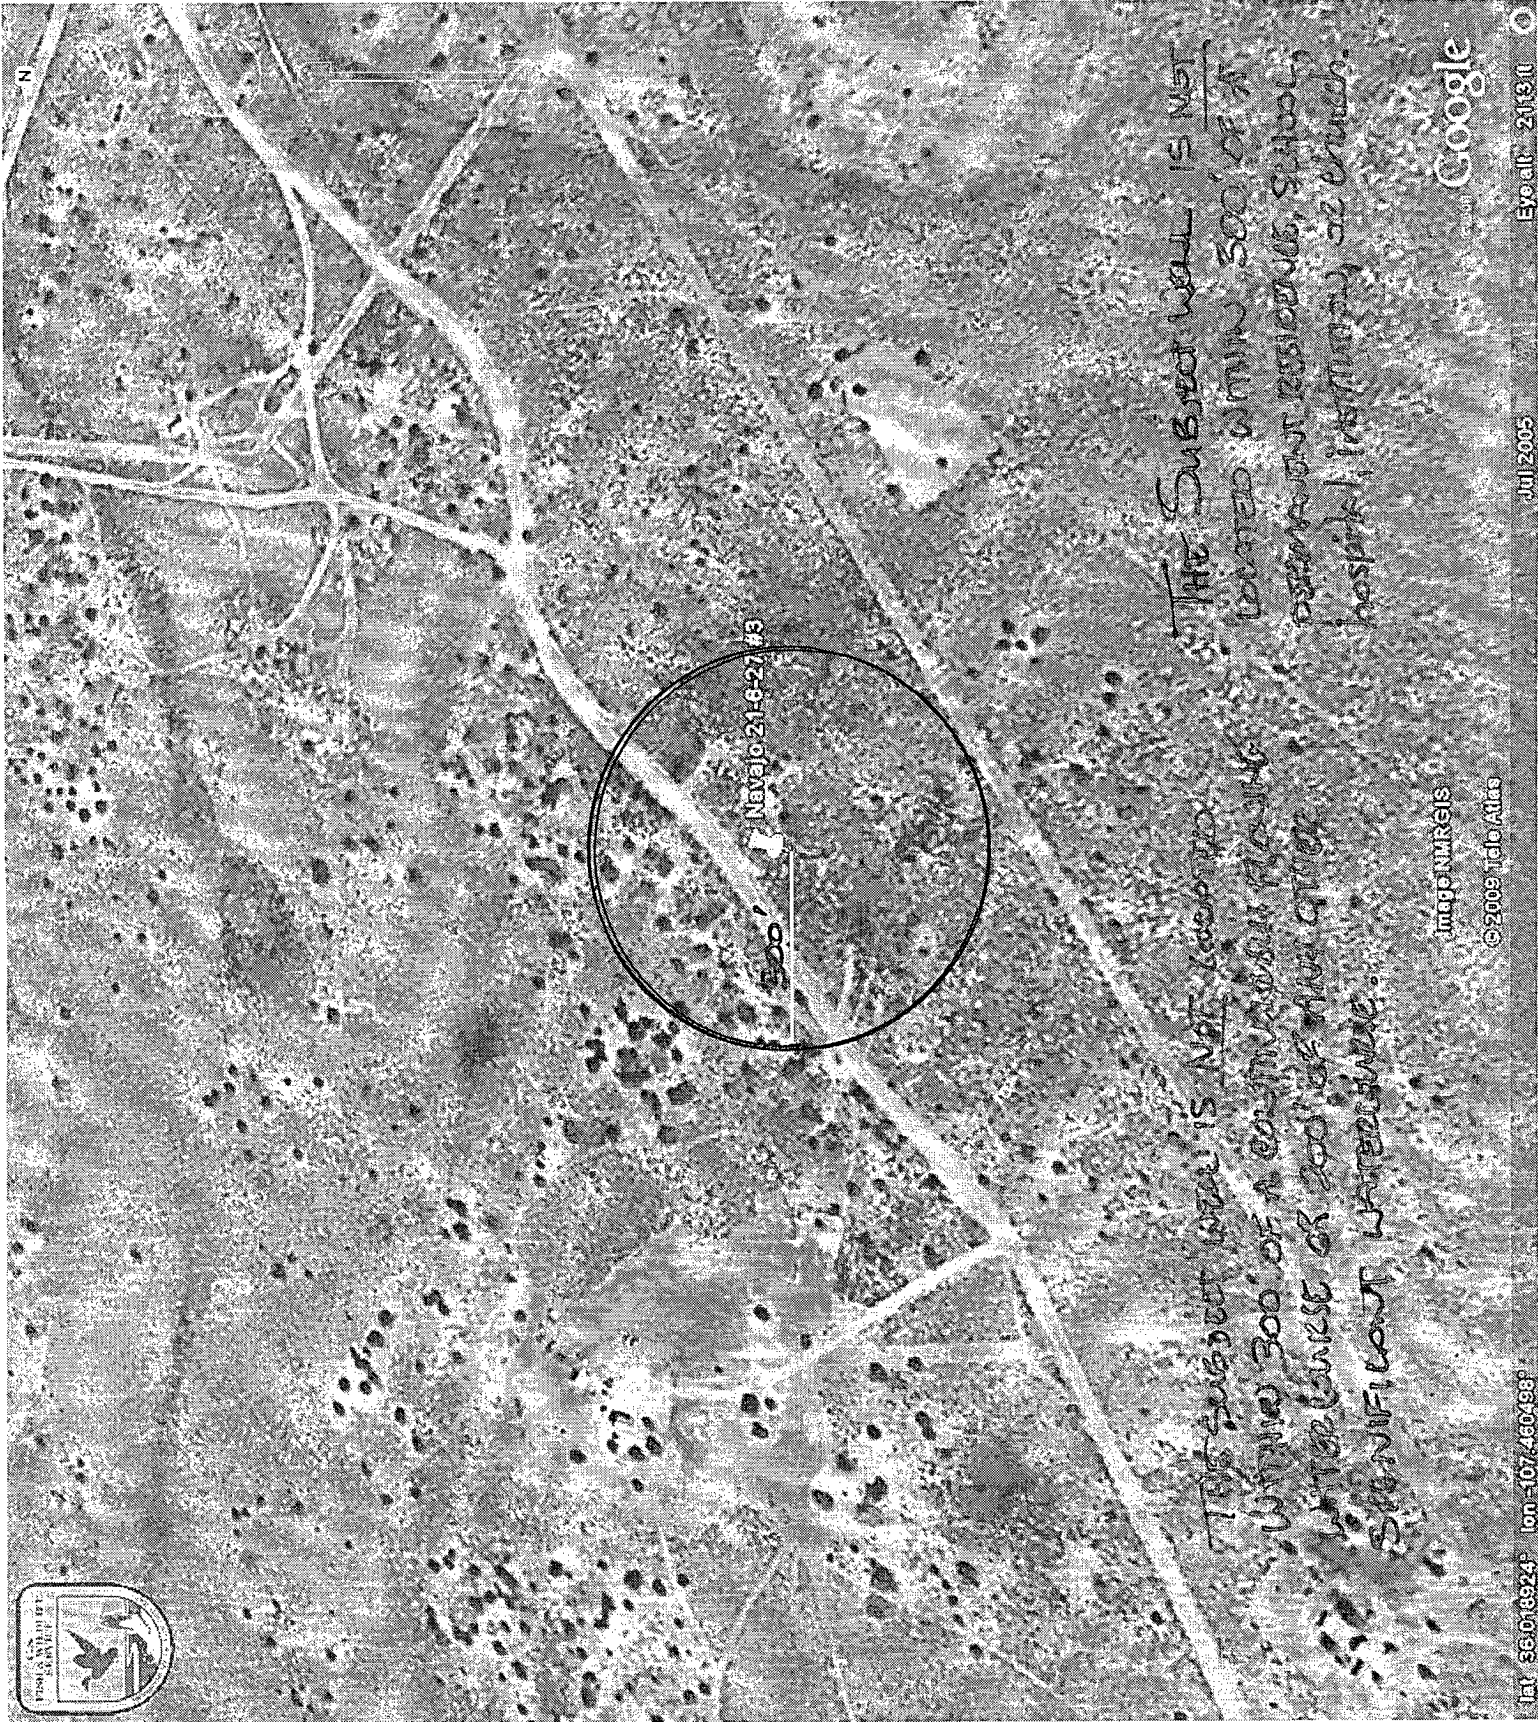

THE SUBJECT WELL IS NOT
LOCATED WITHIN 300' OF A
SIGNIFICANT RESIDENCE, SCHOOL,
HOSPITAL, INSTITUTION, OR CHURCH.

THE SUBJECT WELL IS NOT LOCATED
WITHIN 300' OF A COMMERCIAL PLANTING
OR OTHER SIGNIFICANT WATER-USE
ACTIVITY.

ImageMaps

© 2009 InfoAtlas

Google

Lat: 36.016924° Lon: -107.460498°

Jul 2005

Exif: 21311



Naval 0-21-6-27-13

5,500' 1'

THE SUBJECT WELL IS NOT
LOCATED WITHIN 500' OF A
WETLAND

Image NRREIS
© 2009 Info Atlas

Google

lat 36.013326° lon -107.480646°

Jul 2005

Eye alt 1491 ft



Navajo 21-6-27-03

Abuquerque

Status Map

Digital (vector data)
Scan (raster data)
Non-Digital (hardcopy only)
No Data

Image © 2009 DigitalGlobe
Image NREELS
Image U.S. Geological Survey
© 2009 Tele Atlas

Wetland Types

Estuarine and Marine Deepwater
Estuarine and Marine Wetland
Freshwater Emergent Wetland
Freshwater Forested/Shrub Wetland
Freshwater Pond
Lake
Other
Riverine

lat 35.834702° lon -107.89045°

Eyoan 145.89 mi

Unstable Area

RE: Navajo 21-6-27 #3

The well pad is not located near any surface mines or over any subsurface mines. The Soil consists of a clay sand mixture. The location has a 5' cut and a 4' fill. The temporary drilling pit will be located in the cut on the cut side of the location.



N

SAN JUAN

SAN JUAN

San Juan

El Pintado South COP

Navajo 21-6-27 #3

Image © 2009 DigitalGlobe
Image NIMA
© 2009 GeoAtlas

Google


Lat 36.073997° Lon -107.426801°


Jul 2005

Elev 28.03 m

MMQonline Public Version

SUBJECT AREA - NOV 20 21-6-27 13

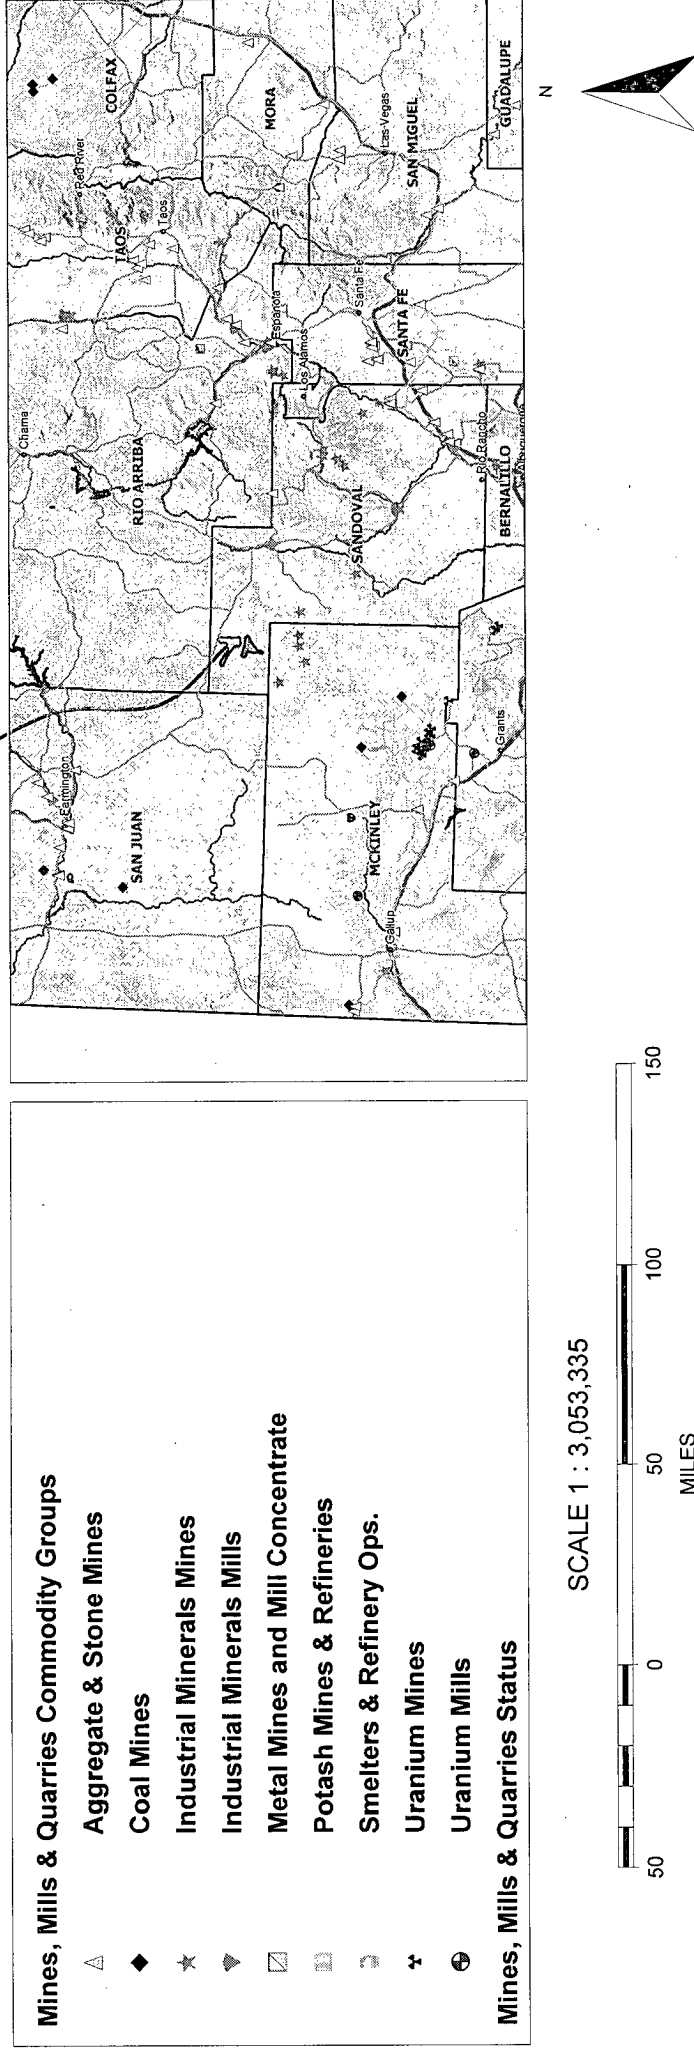

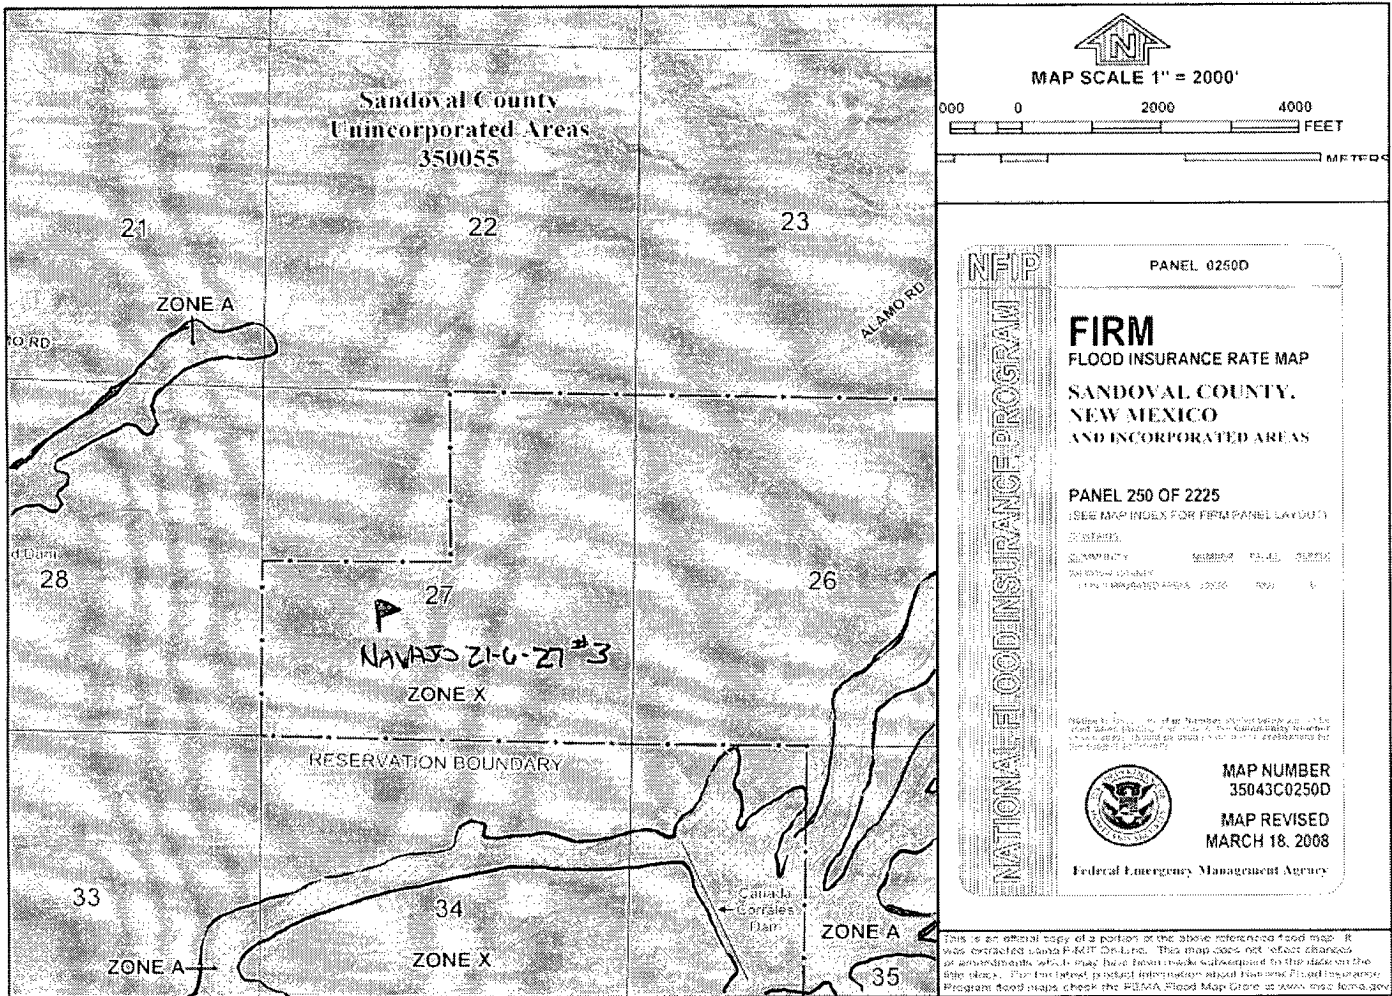

THE NAVAJO 21-6-27#3 IS NOT IN THE 100 YEAR FLOODPLAIN

Hydrogeology Report for the Navajo 21-6-27 #3

The Federal 21-6-29 #1 located in Sandoval County, is in the upper southeastern reaches of the San Juan River drainage basin. The surface is covered by Quaternary alluvium consisting of unconsolidated sand, gravel, silt, clay, terrace gravel and boulder deposits. The alluvium itself is not a source for ground water. The consolidated rock outcrops along the drainage are the Tertiary Age Paleocene Nacimiento Formation which underlies the alluvium. The Nacimiento Formation is a stratified fluvial sand and shale sequence less than 200 feet thick.

The aquifer in this area of the San Juan Basin primarily consists of the Ojo Alamo Sandstone. The top of the Ojo Alamo at this drill site is estimated to be approximately 425 feet below the surface. The Ojo Alamo is a permeable conglomerate and medium to very coarse sandstone interlayered with relatively impermeable shale. This aquifer contains fresh to moderately saline water. Dissolved-solids concentrations generally increase along the groundwater flow path from less than 1,000 milligrams per liter near recharge areas to about 4,000 as the formation is deeper into the basin.

The proposed well, Navajo 21-6-27 #3, is located in the NESW quarter-quarter of section 27 T21N- R6W. No groundwater wells were identified using the iWaters Database from the Office of the State Engineers.

Reference:

GROUND WATER ATLAS of the UNITED STATES Arizona, Colorado, New Mexico, Utah, HA 730-C, USGS, S.G. Robson and E.R. Banta, 1995


iWaters (Waters Database), New Mexico Office of the State Engineer, 2007

SG Interests I, Ltd.

Temporary Pit Design & Construction Plan

Re: Navajo 21-6-27#3

- 1 - SG Interests will design and construct a temporary pit to contain liquids, solids, prevent contamination of fresh water, and protect public health and environment.
- 2 - Prior to constructing the pit, topsoil will be stockpiled per APD for later use in reclamation.
- 3 - SGI will have sign on location in compliance with 19.15.3.103 NMAC.
- 4 - SGI shall construct all new fences utilizing 48" hog wire on bottom with a single strand of barbed wire on top. T-posts will be installed a minimum of every 12 feet and corners will be braced. Temporary pits will be fenced at all times except during drilling or workover operations when the rig side of the fence will be temporarily removed for operational purposes.
- 5 - SGI shall construct the temporary pit so the foundation and interior slopes are compact, free of rocks, debris, sharp edges and irregularities to prevent liner failure.
- 6 - SGI shall construct the pit so the slopes are no steeper than two horizontal feet to one vertical foot. Any other design will be submitted for administrative approval. *The Navajo 21-6-27 #3 has submitted for administrative approval a slope of one horizontal foot to two vertical feet.*
- 7 - All temporary pits will be lined with a 20 mil string reinforced, LLDPE liner, complying with EPA SW-846 method 9090A requirements.
- 8 - Geotextile will be installed beneath the liner if integrity will be compromised from sharp edges or irregularities.
- 9 - Liner will be anchored in the bottom of a compacted earth filled trench at least eighteen inches deep.
- 10 - Liner seams will be minimized and oriented up and down, not cross slope. Factory seams will be used wherever possible. Field seams will be overlapped four to six inches and welded by qualified personnel. Seams will be minimized in corners and irregularly shaped areas.
- 11 - The liner shall be protected from any fluid force through the use of mud pit slides or a manifold system.
- 12 - Diversion ditches and berms will be used to prevent natural runoff from entering pit.
- 13 - Pit volume will not exceed 10 acre feet, including freeboard.
- 14 - Temporary blow pits will be constructed to allow fluid discharged to unlined pit, as allowed by Rule 19.15.17.11.F.11, to gravity flow into lined pit.
- 15 - Freestanding liquids will not be allowed in unlined portion of a temporary blow pit.

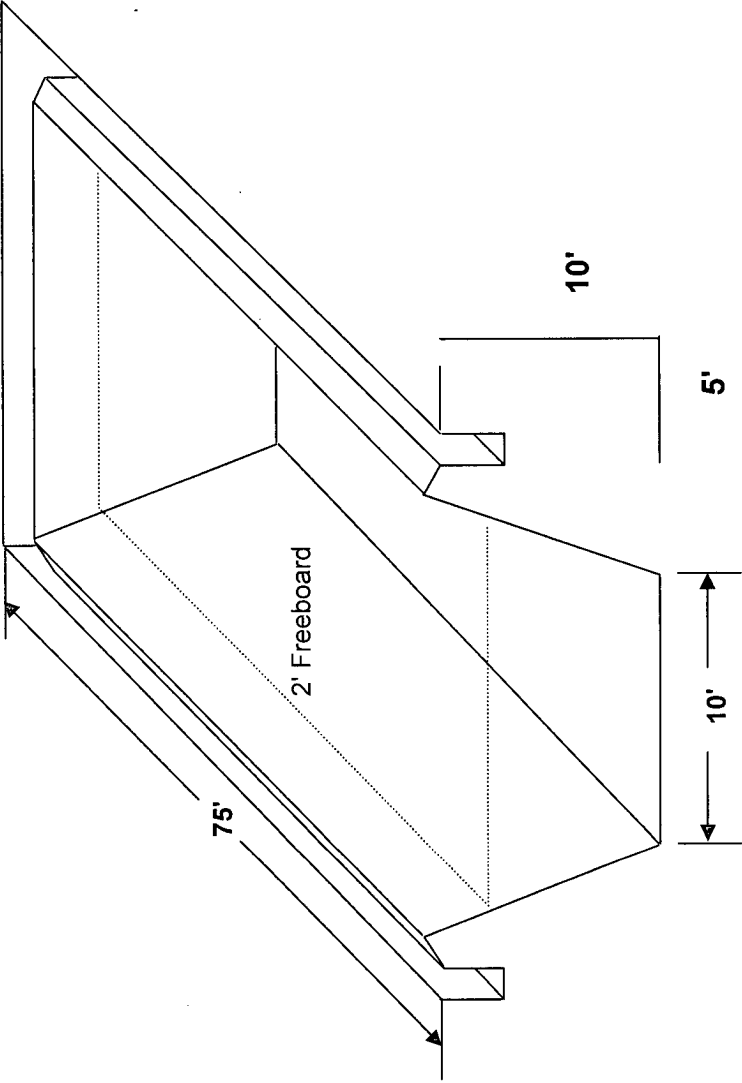

Pit to be lined with 20 mil LLDPE Material

Liner will be anchored in anchor ditch

SG Interests I, Ltd.

Temporary Pit - Maintenance & Operating Plan

Re: Navajo 21-6-27 #3

- 1 - SG Interests will design and construct a temporary pit to contain liquids, solids, prevent contamination of fresh water, and protect public health and environment.
- 2 - SGI will dispose of drilling fluids at Basin Disposal Inc., Permit # NM-01-005 or Agua Moss Permit # Pretty Lady 30-11-34 #1.
- 3 - SGI will not dispose of or store any hazardous waste in any temporary pit.
- 4 - If the pit liner's integrity is compromised, or if any penetration of the liner occurs above the liquid surface, the NMOCD Aztec Division office will be notified by phone or e-mail within forty eight hours.
- 5 - If a leak develops below the liquid level SGI shall remove all liquids above the damaged liner within forty eight hours and repair the damage to the liner. For leaks less than 25 Bbls SGI shall notify the NMOCD Aztec office within forty eight hours of the discovery. For leaks greater than 25 Bbls SGI shall notify the NMOCD Aztec office within twenty four hours of the discovery. In addition verbal notification shall be given to the divisions Environmental Bureau Chief.
- 6 - The liner shall be protected from any fluid force through the use of mud pit slides or a manifold system.
- 7 - Diversion ditches and berms will be used to prevent natural runoff from entering pit.
- 8 - SGI shall immediately remove any visible layer of oil from the surface of the temporary pit. An oil absorbent boom will be used to contain and remove oil from the pits surface. An oil absorbent boom will be kept on-site until closure of pit.
- 9 - Only fluids generated during the drilling or completion process will be discharged into a temporary pit.
- 10 - The pit will be kept free of miscellaneous solid waste and or debris.
- 11 - During drilling or completion operations, SGI will inspect the temporary pit at least once daily to insure compliance with this plan. Inspections will be logged in the IADC reports and SGI daily drilling reports. These reports will be filed with the NMOCD Aztec Division office upon closure of the pit.
- 12 - After drilling or completion operations, SGI will inspect the temporary pit at least once weekly so long as liquids are present in the pit. Inspections will be logged as a continuation of the SGI daily drilling report and will be filed with the NMOCD Aztec Division office upon closure of the pit.
- 13 - The temporary pit shall always maintain a minimum of two feet of freeboard.
- 14 - Freestanding liquids will be removed from a temporary pit within 30 days from the date the drilling rig is released and removed as needed thereafter until the pit is closed.
- 15 - SGI will remove all freestanding liquids from a cavitation pit within 48 hours after completing a cavitation. SGI may request additional time to remove liquids from the NMOCD Aztec Division office if SGI is not able to remove liquids in 48 hours.

SG Interests I, Ltd.

Temporary Pit - Closure Plan

Re: Navajo 21-6-27 #3

All closure activities will include proper documentation and be available for review upon request and will be submitted to the NMOCD Aztec Division office within 60 days of pit closure. Closure report will be filed on form C-144 and incorporate the following:

Details on capping and covering (where applicable)
Plot Plan (Pit Diagram)
Inspection Reports
Sampling Results
C-105

- 1 – All freestanding liquids will be removed at the start of the pit closure process from the pit and disposed of in a division approved facility or recycle, re-use or reclaim the liquids in a manner that the appropriate division district office approves. SGI plans to dispose of drilling fluids at Basin Disposal Inc., Permit # NM-01-005, or Agua Moss Permit # Pretty Lady 30-11-34 #1 unless otherwise noted.
- 2 - The method of closure for all temporary pits will be on-site burial as long as all the criteria listed in sub-section B of 19.15.17.13 NMAC are met.
- 3 - The surface owner shall be notified of SGI closure plan using a means that provides proof of notice i.e., certified mail, return receipt requested or electronic mail with read receipt.
- 4 - Temporary pits will be closed, re-contoured, and re-seeded 6 months after drilling rig is released.
- 5 - Pit contents shall be mixed with non waste containing earth material in order to achieve the solidification process. The solidification process will be accomplished using a combination of natural drying and mechanical mixing. Pit contents will be mixed with non waste, earth material to a consistency that is deemed safe and stable. The mixing ratio shall not exceed 3 parts clean soil to 1 part pit contents.

The sampling can be taken prior to mixing but if the contents exceed the parameters then contents must be sampled after mixing and meet the criteria before closure.

BTEX	EPA SW 846 8021B or 8260B	50
TPH	EPA SW 846 418.1	2500
GRO/DRO	EPA SW 846 8015M	500
Chlorides	EPA 300.1	1000

In the event the criteria are not met all contents and remediation will be handled per 19.15.17.13.B.1 NMAC. If ground water is 50'-100' below the bottom of the buried waste all limits are the same except the chloride limit is reduced to 500 mg/kg.

- 6 - Liner of temporary pit will be removed above "mud level" after stabilization. Liner will be cut and all excessive liner will be removed and taken to a licensed disposal facility.
- 7 - Upon completion of solidification and satisfactory test results the pit area will be backfilled and compacted with non-waste earth material. A minimum of four feet of cover with the top foot (or background thickness of topsoil whichever is greater) suitable to establish vegetation at the site.
- 8 - The pit cover will be re-contoured and re-vegetated complying with subsections G,H,&I of 19.15.17.13 NMAC.
- 9 - Notification will be sent to NMOCD Aztec Division office when reseeding is completed.
- 10 - SGI will seed the disturbed areas the first growing season after the operator closes the pit. Seeding will be accomplished by drilling on the contour whenever practical or by other division approved methods. APD stipulated seed mixes will be used on Federal and Tribal lands. Vegetative cover will equal 70% of the native perennial vegetative cover (unimpacted) consisting of at least three native plant species, including at least one grass, but not including noxious weeds. Seed cover will be maintained thru two consecutive growing seasons. Repeat seeding or planting will be continued until successive vegetative growth occurs.
- 11 - The closed temporary pit will have a steel marker no less than four inches in diameter, extending four feet above mean ground level, extending and cemented in a hole three feet deep, in the center of the onsite burial upon completion of the closing. The marker will be permanently welded, stamped or engraved to include the operator name, lease name, well name and number, unit number, section, township, range, and indicator that the marker is an onsite burial location. SGI reserves the right to install a temporary flat plate marker, one foot by two feet, with the same information if it is deemed necessary for safe operation on the wellsite during the productive life of the well. A full size marker will then be installed upon final abandonment.

Tripp Schwab

From: Tripp Schwab [tripp@nikaenergy.com]
Sent: Friday, February 13, 2009 11:11 AM
To: (Christina.Ashley@bia.gov)
Subject: landowner notification

Subject: Navajo 21-6-27 #3 API# 30-043-21048 Lease # NOG-0205-1607

Ms. Ashley,

The requirements of the new OCD pit rule 17 requires notification to the surface owner that we are planning to open, use and close a temporary drilling pit on the subject location.

SGL plans to construct and close the temporary pit per approved DOI-BLM APD and NMOCD rules.

This notice will be followed with a hard letter notification.

Please let me know if you have any questions.

Thank you for your time,

Tripp Schwab
Nika Energy Operating
Agent for SG Interests I, Ltd.
970-259-2701 off
970-385-1598 fax

Nika Energy Operating

February 13, 2009

Christina Ashley
Director
FIMO, DOI
Farmington Field Office
1235 La Plata Highway, Suite A
Farmington, NM 87401


RE: Navajo 21-6-27 #3, API # 30-043-21048, NOG-0205-1607

Ms. Ashley,

This is a follow up certified letter as per the requirements of the new OCD pit rule 17 requiring notification to the surface owner that we are planning to open, use and close a temporary drilling pit on the subject location. After drilling operations cease, SGI plans to close the temporary pit per the approved APD and the new NMOCD rules.


Please let me know if you have any questions.

Thank you for your time.


Tripp Schwab
President
Nika Energy Operating, LLC
Agent for SG Interests.

U.S. Postal Service™	
CERTIFIED MAIL™ RECEIPT	
(Domestic Mail Only; No Insurance Coverage Provided)	
For delivery information visit our website at www.usps.com	
FARMINGTON NM 87401	
OFFICIAL USE	
Postage	\$ 0.42
Certified Fee	\$ 2.70
Return Receipt Fee (Endorsement Required)	\$ 2.20
Restricted Delivery Fee (Endorsement Required)	\$ 0.00
Total Postage & Fees	\$ 5.32

9260 9221 1220 0001 0002



Sent To	
Christina Ashley	
Street, Apt. No. or PO Box No.	1235 La Plata Hwy #A
City, State, ZIP+4	Farmington NM 87401

PS Form 3800, August 2006 See Reverse for Instructions