


(SUBMIT IN TRIPLICATE)

Land Office Roswell, New Mex.  
Lease No. SF-076315  
Unit Torrcon

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY



SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	X	SUBSEQUENT REPORT OF WATER SHUT-OFF.....
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....		SUBSEQUENT REPORT OF ALTERING CASING.....
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR.....
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....
NOTICE OF INTENTION TO ABANDON WELL.....		

Y CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

**ILLEGIBLE**

August 23, 19 55

Well No. 1 is located 1980 ft. from 1/4 S line and 660 ft. from 1/4 W line of sec. 22  
1/4 Sec. and Sec. No.      T-18-N      Range      N78W      Meridian  
Wildcat      Sandoval County      New Mexico  
(Field)      (County or Subdivision)      (State or Territory)

The elevation of the derrick floor above sea level is 6378 ft.  
ground level 6378 feet, ungraded  
**DETAILS OF WORK**

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Reynolds Mining Corporation proposes to drill a 7900 foot test or to the base of the Pennsylvanian whichever is the lesser depth. Approximately four hundred feet of 10 3/4 inch casing will be set with a sufficient amount of cement to completely encase the casing from bottom to top. All prospective oil and gas zones will be adequately tested by coring and/or drill stem testing. Mud will be used from the surface of the ground to total depth in order to insure good samples. Also a mud logging unit will be placed on the well to analyze all cutting and mud from surface of the ground to total depth. Any oil or gas shows found by the mud logging unit will be adequately tested by either coring or drill stem testing or both. If oil or gas is found to be in commercial quantities 5 1/2 inch casing will be run and cemented with sufficient cement to protect all commercial oil and gas zones.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Reynolds Mining Corporation  
Address 152 1/2 East 9th Street  
Box 1326  
Durango, Colorado  
By C. C. McFarland  
C. C. McFarland  
Title District Engineer

COMPANY Reynolds Mining Corporation

Well Name & No. Torreón Number 1 Lease No. SF-078515

Location 1980' from the South line and 660' from the West line.


Being in NW<sup>1</sup>SW<sup>4</sup>

Sec. 22, T. 18 N., R. 4 W., N.M.P.M., Sandoval County, New Mexico.

Ground Elevation 6378, grd.

RECEIVED

AUG 30 1955  
U. S. GEOLOGICAL SURVEY  
FARMINGTON, NEW MEXICO

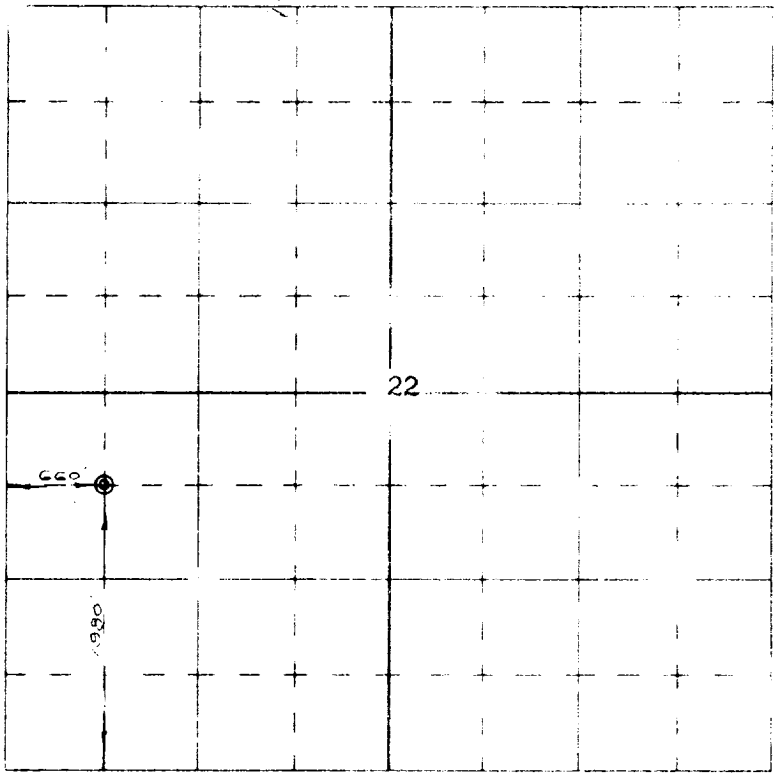

Scale -- 4 inches equal 1 mile

Surveyed August 18, 1955

This is to certify that the above plat was prepared from field notes of actual surveys made by me or under my supervision and that the same are true and correct to the best of my knowledge and belief.

*Ernest V. Echohawk*

Ernest V. Echohawk  
Registered Land Surveyor  
N. M. Reg. #1545

Seal:

Farmington, New Mexico