

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☐ gas well ☒ other ☐

2. NAME OF OPERATOR
Dome Petroleum Corp.

3. ADDRESS OF OPERATOR 501 Airport Drive,
Suite 114, Farmington, New Mexico 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1610' PSL, 1840' FWL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF	<input type="checkbox"/>	<input type="checkbox"/>
FRACTURE TREAT	<input type="checkbox"/>	<input type="checkbox"/>
SHOOT OR ACIDIZE	<input type="checkbox"/>	<input type="checkbox"/>
REPAIR WELL	<input type="checkbox"/>	<input type="checkbox"/>
PULL OR ALTER CASING	<input type="checkbox"/>	<input type="checkbox"/>
MULTIPLE COMPLETE	<input type="checkbox"/>	<input type="checkbox"/>
CHANGE ZONES	<input type="checkbox"/>	<input type="checkbox"/>
ABANDON*	<input type="checkbox"/>	<input type="checkbox"/>
(other) <u>Spud and set surface casing</u>		

5. LEASE
NM 6676

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Dome Federal 29-22-6

9. WELL NO.
2

10. FIELD OR WILDCAT NAME
Rusty Chacra Extension

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 29, T22N, R6W

12. COUNTY OR PARISH 13. STATE
Sandoval New Mexico

14. API NO.


15. ELEVATIONS (SHOW DF, KDB, AND WD)
6997' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)



17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded 11" hole at 11:00 a.m. 8/26/80. Drilled to 137'. Ran 3 jts. (135') 8 5/8", 23#, K55, ST&C Casing. Casing landed at 137' GL. Cemented with 100 sacks Class "B" Cement with 2% CaCl. Plug down at 6:30 p.m. 8/26/80. Circulated cement.

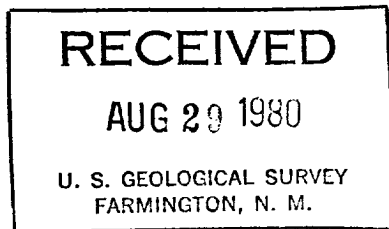

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED H. D. HOLMES TITLE Drill. & Prod. Foreman DATE August 27, 1980

(This space for Federal or State office use)

ACCEPTED FOR RECORD

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

DATE _____

SEP 04 1980

NMOCC

FARMINGTON DISTRICT

BY RH

*See Instructions on Reverse Side