

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Jack A. Cole

3. ADDRESS OF OPERATOR
P. O. Box 191, Farmington, N.M. 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1850/S & 790/W Sec. 9-T21N-R6W
AT TOP PROD. INTERVAL: Same
AT TOTAL DEPTH: Same

5. LEASE
NM21454

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Alamos Canyon

9. WELL NO.
5

10. FIELD OR WILDCAT NAME
Wildcat

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 9-T21N-R6W

12. COUNTY OR PARISH
Sandoval

13. STATE
New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6808 Gr.

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

PULL OR ALTER CASING



MULTIPLE COMPLETE

CHANGE ZONES

ABANDON*

(other) Running Casing

SUBSEQUENT REPORT OF:

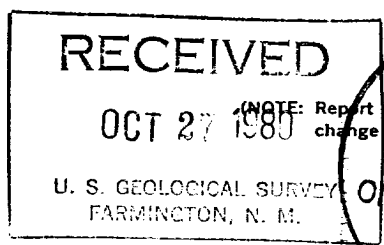

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded well 8-31-80. Run 3 joints 8 5/8", 24.0 lb casing to 135'. Cemented with 135 sacks. Cement circulated. WOC 19 hours. Reached TD 1525' 9-3-80. Ran Schlumberger ES-Ind and GR, density logs. Ran 40 joints 4 1/2" 10.50 lb. casing. Cemented at 1512' with 190 sacks 50-50 poz, 6 lbs. salt per sack. Cement circulated FC @ 472'. 10-8-80 Perforated casing 1326-62 with 32 holes. Sand and water frac treated with 30,000 gallons water, 20 tons CO2 and 40,000 lbs 20-40 sand. BDP 1650; TP 920; IR 31 BPM. 10-9-80 Ran 41 joints 4" tubing to 1334. Swabbed well in. Blowing well to clean up after frac.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct
SIGNED Jack A. Cole TITLE Operator DATE October 24, 1980

(This space for Federal or State office use)
APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

*See Instructions on Reverse Side

MOCC

BY L