

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐		7. UNIT AGREEMENT NAME Cañada Ojitos Unit
2. NAME OF OPERATOR BOLACK-GREER, INC.		8. FARM OR LEASE NAME
3. ADDRESS OF OPERATOR 158 Petroleum Center Building, Farmington, N.Mex.		9. WELL NO. 1-14
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 1125' FNL, 450' FEL, Sec. 14, T-25N, R-1W		10. FIELD AND POOL, OR WILDCAT Puerto Chiquito
14. PERMIT NO.		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 14, T-25N, R-1W
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 7135' RKB		12. COUNTY OR PARISH Rio Arriba
		13. STATE New Mexico

18. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
TEST WATER SHUT-OFF ☒	PULL OR ALTER CASING ☐	WATER SHUT-OFF ☒	REPAIRING WELL ☐
FRACTURE TREAT ☐	MULTIPLE COMPLETE ☐	FRACTURE TREATMENT ☐	ALTERING CASING ☐
SHOOT OR ACIDIZE ☐	ABANDON* ☐	SHOOTING OR ACIDIZING ☐	ABANDONMENT* ☐
REPAIR WELL ☐	CHANGE PLANS ☐	(Other) ☐	

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*


11-13-65 ⁶⁴ TD 6598'. Set whipstock with top at 5136' and bottom at 5152'.
11-24-65 ⁶⁴ Drilled to TD 6225'. 16-3/4" at 6198'.

11-25-65 ⁶⁴ Ran 188 joints 6213' of 5-1/2" OD 15.5# J-55 casing with left-hand backoff collar and nipple 1224' off bottom. Cemented with 175 sacks regular cement. Backed off at collar. Top of liner 5001', bottom 6225'.

11-26-65 ⁶⁴ Temperature survey showed top of cement at 5000'.

11-29-65 ⁶⁴ Drilled with air to 6413'. Plugged back to 6163' with cement.

11-30-65 ⁶⁴ Tested casing to 1875#. No decrease in one hour.
Drilled cement to PBDT 6270'

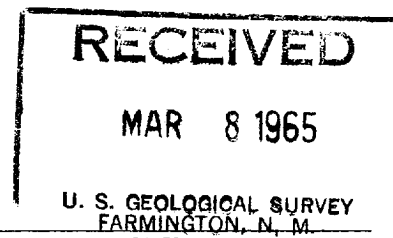

18. I hereby certify that the foregoing is true and correct

SIGNED Vergil H. Strab

TITLE Engineer

DATE 4-5-65

(This space for Federal or State office use)

APPROVED BY _____
CONDITIONS OF APPROVAL, IF ANY:

TITLE _____

DATE _____

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

U.S. GOVERNMENT PRINTING OFFICE: 1983-O-665229
867-851

