

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☐ well gas ☒ well other ☐

2. NAME OF OPERATOR
Amoco Production Company

3. ADDRESS OF OPERATOR
501 Airport Drive Farmington, NM 87401

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
1840' FNL X 1800' FEL
AT SURFACE: Section 26, T25N, R4W
AT TOP PROD. INTERVAL: same
AT TOTAL DEPTH: same

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
Jicarilla Contract 125

6. IF INDIAN, ALLOTTEE OR TRIBE NAME
Jicarilla Apache

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Jicarilla Apache Tribal 125

9. WELL NO.
8

10. FIELD OR WILDCAT NAME
Lindrith Gallup-Dakota West

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
SW/4, NE/4
Section 26, T25N, R4W

12. COUNTY OR PARISH
Rio Arriba

13. STATE
New Mexico

14. API NO.
30-039-22353

15. ELEVATIONS (SHOW DF, KDB, AND WD)
7041' GL

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:

TEST WATER SHUT-OFF ☐ ☐

FRACTURE TREAT ☐ ☐

SHOOT OR ACIDIZE ☐ ☐

REPAIR WELL ☐ ☐


PULL OR ALTER CASING ☐ ☐

MULTIPLE COMPLETE ☐ ☐

CHANGE ZONES ☐ ☐

ABANDON* ☐ ☐

(other) spud and set casing

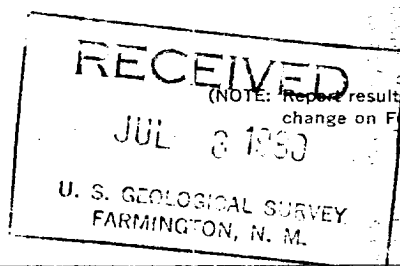

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded a 12-1/4" hole on 5-26-80 and drilled to 307'. Set 8-5/8" 24# surface casing at 307' on 5-27-80, and cemented with 315 sx of class "B" Neat cement containing 2% CaCl₂. Good cement was circulated to the surface. Drilled a 7-7/8" hole to a TD of 7966'. Set 5-1/2" 17# production casing at 7956', on 6-15-80, and cemented in two stages.

1) used 225 sx of class "B" Neat cement containing 50/50 Poz, 6% gel, 2# Medium tuf plug per sx, and .8% fluid loss additive. This was tailed in with 320 sx of class "B" Neat cement. Good circulation but no cement was circulated to the surface.

2) used 730 sx of class "B" Neat cement containing 65/35 Poz, 6% gel, 2# Medium tuf plug per sx, and .8% fluid loss additive. This was tailed in with 100 sx of class "B" Neat cement. Good circulation but no cement was circulated to the surface.

The DV tool was set at 5786'.

The rig was released on 6-15-80.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED _____ TITLE Dist. Adm. Supvr. DATE 6-30-80

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____

ACCEPTED FOR RECORD

NMOCC

ACCEPTED FOR RECORD

JUL 11 1980

*See Instructions on Reverse Side

FARMINGTON DISTRICT

JUL 11 1980