

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well ☒ gas well ☐ other ☐
2. NAME OF OPERATOR  
Northwest Pipeline Corporation
3. ADDRESS OF OPERATOR  
P.O. Box 90, Farmington, N.M. 87499
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1450 FSL & 1520 FWL NW/SW  
AT TOP PROD. INTERVAL: 1450 FSL & 1520 FWL  
AT TOTAL DEPTH: 1450 FSL & 1520 FWL
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐


CHANGE ZONES ☒

ABANDON\* ☐

(other) ☐

SUBSEQUENT REPORT OF:

- ☐
- ☐
- ☐
- ☐
- ☐
- ☐
- ☐
- ☐
- ☐
- ☐

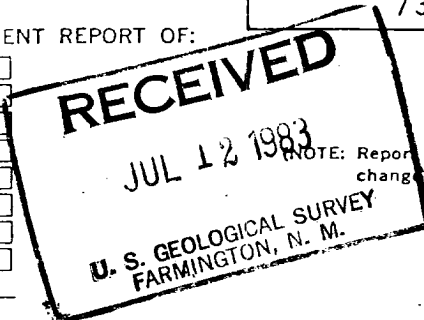

5. LEASE  
SF 079333
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME  
Rucker Lake
9. WELL NO.  
#2
10. FIELD OR WILDCAT NAME  
Wildcat Entrada
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec 24, T25N, R2W
12. COUNTY OR PARISH  
Rio Arriba
13. STATE  
N.M.
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
7396' KB

RECEIVED

NOTE: Report results of multiple completion or zone change on Form 9-330

JUL 22 1983

OIL CON. DIV.  
DIST. 3

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

This well will be drilled as a Wildcat Entrada to a depth of 9150'. 500' of 9-5/8" surface pipe will be set and cemented to surface instead of 350' as previously planned. An 8-3/4" hole will be drilled to TD and a 5-1/2" casing string will be run and cemented from TD if the Entrada appears to be productive. If the Entrada is not productive the hole will be plugged back and the Gallup will be completed. In either case the Ojo Alamo will be protected by cement.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Paul C. Thompson TITLE Sr. Drlg Engineer DATE 7-12-83  
Paul C. Thompson (This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY.

PCT/djb

1

ch 5

\*See Instructions on Reverse Side

NMOCC

