

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil well gas well other

2. NAME OF OPERATOR
Tenneco Oil Company

3. ADDRESS OF OPERATOR
P.O. Box 3249, Englewood, CO 80155

4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)
AT SURFACE: 1120' FSL, 790' FEL
AT TOP PROD. INTERVAL:
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

5. LEASE
USA SF-080658

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Romero Com

9. WELL NO.
1

10. FIELD OR WILDCAT NAME
Und. Mesaverde/Chacra

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 25, T26N, R6W



12. COUNTY OR PARISH | 13. STATE
Rio Arriba | New Mexico

14. API NO.

15. ELEVATIONS (SHOW DF, KDB, AND WD)
6568' GR

- REQUEST FOR APPROVAL TO:
- TEST WATER SHUT-OFF
 - FRACTURE TREAT
 - SHOOT OR ACIDIZE
 - REPAIR WELL
 - PULL OR ALTER CASING
 - MULTIPLE COMPLETE
 - CHANGE ZONES
 - ABANDON*
 - (other)

SUBSEQUENT REPORT OF:

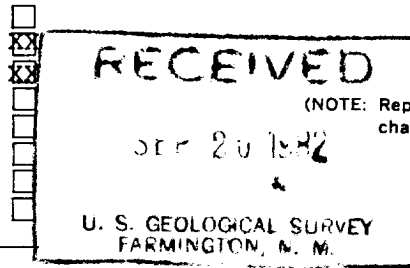

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled; give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

8/26/82 - Set pkr @ 3720'. Brk dn formation @ 1300 psi. Estab'd rate of 4.5 BPM @ 1800 psi. Acid & ball off w/750 gal of 15% wtd HCL & 42 l.l SG ball slrs. Ball action good. Ball off complete. Release pkr. RIH & knocked balls off. Blew well dry w/N₂. POOH w/tbg & pkr. Frac'd well dn csg w/60,000 gal 70% quality foam & 131,000# 20/40 sd. AIR= 20 BPM @ 1600 psi. SI for 2 hrs. Fld back to pit thru 1/2" tapped bull plug. Left flwg.

8/27/82 - RIH w/tbg, FN, seal assy & blast jts. Tagged sd fill @ 3700'. CO top of pkr w/foam. Knock expendable plug out. Land btm of tbg @ 5100' w/blast jsts across Chacra. RIH w/1-1/4" tbg., sn, perf'd sub & pump out plug. Land btm of 1-1/4" @ 3730'. NDBOP, NUWH. Kicked Chacra around w/N₂. Left both sides flwg.

8/28/82 - FTCU.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED Denise Wilson TITLE Production Analyst DATE 9/13/82

(This space for Federal or State office use)

APPROVED BY _____ TITLE _____ DATE _____
CONDITIONS OF APPROVAL, IF ANY:

ACCEPTED FOR RECORD

SEP 22 1982

*See Instructions on Reverse Side

NMOCC

FARMINGTON DISTRICT

BY [Signature]