of the earlier submittal.

# OIL CONSERVATION DIVISION

FORM C-108 Revised 7-1-81

POST OFFICE BOX 2016 STATE LAND OFFICE BUY CING SANTA FE NEW MEXILO 8/5UT

APPLICATION FOR	AUTHORIZATION	TO INJECT
-----------------	---------------	-----------

1.	Purpose: Secondary Recovery Application qualifies for administrative approval? Nes and a		
II.	Operator: Hixon Development Company		
	Address: P.O. Box 2810, Farmington, NM 87499		
	Contact party: Aldrich L. Kuchera Phone: 326-3325		
III.	Well data: Complete the data required on the reverse side of this form for each well proposed for injection. Additional sheets may be attached if necessary.		
IV.	Is this an expansion of an existing project? $X$ vesno If yes, give the Division order number authorizing the project		
٧.	Attach a map that identifies all wells and leases within two miles of any proposed injection well with a one-half mile radius circle drawn around each proposed injection well. This circle identifies the well's area of review.		
VI.	Attach a tabulation of data on all wells of public record within the area of review which penetrate the proposed injection zone. Such data shall include a description of each well's type, construction, date drilled, location, depth, record of completion, and a schematic of any plugged well illustrating all plugging detail.		
VII.	Attach data on the proposed operation, including:		
	<ol> <li>Proposed average and maximum daily rate and volume of fluids to be injected;</li> <li>Whether the system is open or closed;</li> <li>Proposed average and maximum injection pressure;</li> <li>Sources and an appropriate analysis of injection fluid and compatibility with the receiving formation if other than reinjected produced water; and</li> <li>If injection is for disposal purposes into a zone not productive of oil or gas at or within one mile of the proposed well, attach a chemical analysis of the disposal zone formation water (may be measured or inferred from existing literature, studies, nearby wells, etc.).</li> </ol>		
111.	Attach appropriate geological data on the injection zone including appropriate lithologi detail, geological name, thickness, and depth. Give the geologic name, and depth to bottom of all underground sources of drinking water (aquifers containing waters with total dissolved solids concentrations of 10,000 mg/l or less) overlying the proposed injection zone as well as any such source known to be immediately underlying the injection interval.		
IX.	Describe the proposed stimulation program, if any.		
х.	Attach appropriate logging and test data on the well. (If well logs have been filed with the Division they need not be resubmitted.)		
XI.	Attach a chemical analysis of fresh water from two or more fresh water wells (if available and producing) within one mile of any injection or disposal well showing location of wells and dates samples were taken.		
XII.	Applicants for disposal wells must make an affirmative statement that they have examined available geologic and engineering data and find no evidence of open faults or any other hydrologic connection between the disposal zone and any underground source of drinking water.		
III.	Applicants must complete the "Proof of Notice" section on the reverse side of this form.		
XIV.	Certification		
	I hereby certify that the information submitted with this application is true and correct to the best of my knowledge and belief.  Name: Aldrich L. Kuchera Title President  Signature: Date:		

\* If the information required under Sections VI, VIII, X, and XI above has been previously submitted, it need not be duplicated and resubmitted. Please show the date and circumstance

#### III. WELL DATA

- A. The following well data must be submitted for each injection well covered by this application. The data must be both in tabular and schematic form and shall include:
  - Lease name; Well No.; location by Section, Township, and Range; and footage location within the section.
  - (2) Each casing string used with its size, setting depth, sacks of cement used, hole size, top of cement, and how such top was determined.
  - (3) A description of the tubing to be used including its size, lining material, and setting depth.
  - (4) The name, model, and setting depth of the packer used or a description of any other seal system or assembly used.

Division District offices have supplies of Well Data Sheets which may be used or which may be used as models for this purpose. Applicants for several identical wells may submit a "typical data sheet" rather than submitting the data for each well.

- B. The following must be submitted for each injection well covered by this application. All items must be addressed for the initial well. Responses for additional wells need be shown only when different. Information shown on schematics need not be repeated.
  - (1) The name of the injection formation and, if applicable, the field or pool name.
  - (2) The injection interval and whether it is perforated or open-hole.
  - (3) State if the well was drilled for injection or, if not, the original purpose of the well.
  - (4) Give the depths of any other perforated intervals and detail on the sacks of cement or bridge plugs used to seal off such perforations.
  - (5) Give the depth to and name of the next higher and next lower oil or gas zone in the area of the well, if any.

#### XIV. PROOF OF NOTICE

All applicants must furnish proof that a copy of the application has been furnished, by certified or registered mail, to the owner of the surface of the land on which the well is to be located and to each leasehold operator within one-half mile of the well location.

Where an application is subject to administrative approval, a proof of publication must be submitted. Such proof shall consist of a copy of the legal advertisement which was published in the county in which the well is located. The contents of such advertisement must include:

- (1) The name, address, phone number, and contact party for the applicant;
- (2) the intended purpose of the injection well; with the exact location of single wells or the section, township, and range location of multiple wells:
- (3) the formation name and depth with expected maximum injection rates and pressures; and
- (4) a notation that interested parties must file objections or requests for hearing with the Oil Conservation Division, P. O. Box 2088, Santa Fe, New Mexico 87501 within 15 days.

NO ACTION WILL BE TAKEN ON THE APPLICATION UNTIL PROPER PROOF OF NOTICE HAS BEEN SUBMITTED.

NOTICE: Surface owners or offset operators must file any objections or requests for hearing of administrative applications within 15 days from the date this application was mailed to them.



OIL CON. DIV.

Hixon Development Company Application for Authorization to Inject Form C-108 Supplemental Information

Carson Unit Well No. 33-18 NW/4 SE/4, Section 18, T 25N, R 11W San Juan County, New Mexico

- I. Shown on Application.
- II. Shown on Application.
- III. Well data attached.
- IV. This well is located in a Federal and State approved waterflood project operational since 1959.
- V. Area of review is shown on attached map.
- VI. Information for well's located in area of review are attached as follows:

Carson Unit Well No. 13-18

Carson Unit Well No. 32-18

Carson Unit Well No. 42-18

Carson Unit Well No. 113-17

Carson Unit Well No. 31-18

Carson Unit Well No. 22-18

Carson Unit Well No. 23-18

Carson Unit Well No. 24-18

Carson Unit Well No. 34-18

Carson Unit Well No. 43-18

Carson Unit Well No. 44-18

Carson Unit Well No. 31-19

- VII. 1. Proposed average injection rate is 600 BWPD, expected maximum injection rate is 1200 BWPD.
  - 2. The injection system will be closed.
  - 3. Average injection pressures are expected to be in the 855-980 psi range. Maximum injection pressure will be 980 psi.
  - 4. Refer to the attached water analysis report. Since the formation water to be encountered is primarily previously injected water no problems are expected in mixing the two waters.
  - 5. This well is part of an extensive waterflood project active in the Carson Unit since 1959. All produced water is reinjected into the oil productive Lower Gallup sand to maintain pressure. Injection into the Lower Gallup sand is for waterflooding not disposal.

- VIII. The injection zone is the Lower Gallup sandstone. This zone is shown to be 70' in thickness with a top of 4798' KBE as shown on SP log previously submitted. No known sources of underground drinking water exist in this area. Water well drilling in the area has shown the Ojo Alamo to be dry.
  - IX. The well will be acidized if required to maintain injection rate and pressure.
  - X. Logs were previously submitted.
  - XI. No known sources of drinking water exist in this area.
  - XII. This well is part of the existing approved waterflood operation for the Carson Unit. It is not a disposal well.
- XIII. Proof of notification attached.
- XIV. Certification shown on application.

NOTICE

Hixon Development Company, P.O. Box 2810, Farmington, New Mexico

87499, (505) 326-3325 whose agent is Aldrich L. Kuchera hereby

notifies interested parties that the following well is to be

converted to a water injection well. Maximum rate will be 1200

BWPD at less than 980 psi. Any request for information or

objections should be filed with the Oil Conservation Division,


State Land Office Building, P.O. Box 2088, Santa Fe, New Mexico

87501 within 15 days

Carson Unit Well 33-18, NW/4 SE/4, Section 18, T 25N, R 11W

To be published: January 13, 1987

Legal No.: 19368

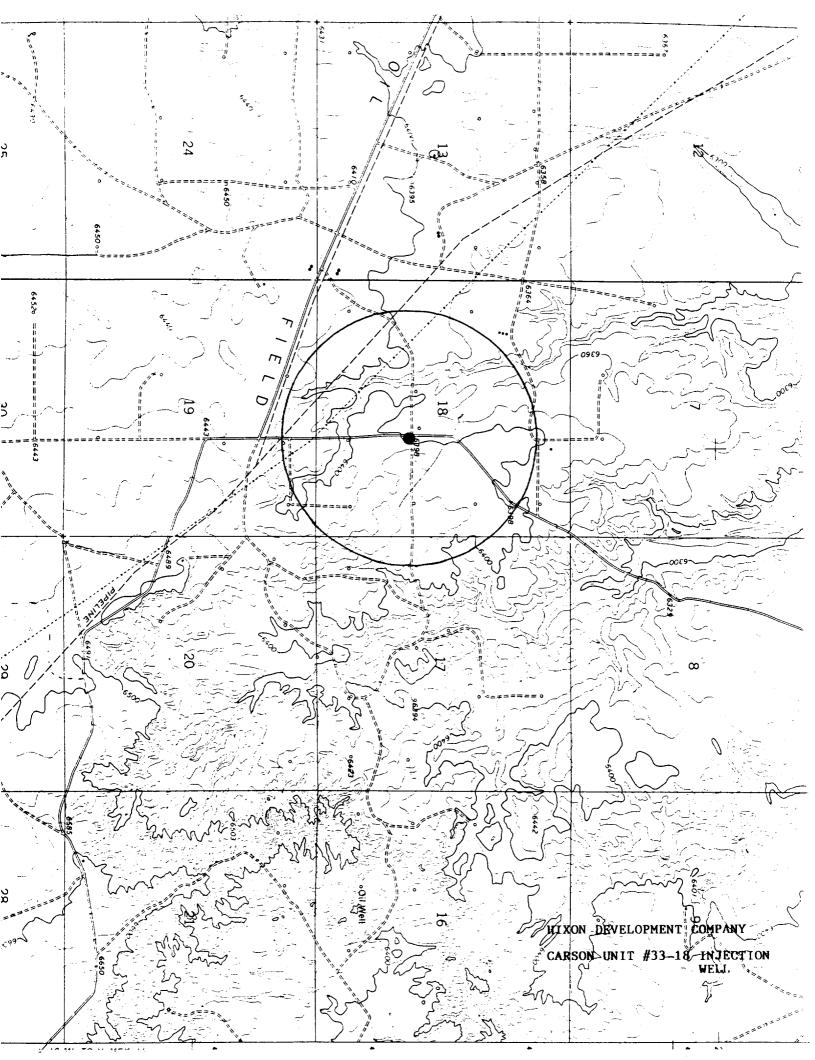

CENTRAL BISTI - CARSON UNIT AREA 

HIXON DEVELOPMENT COMPANY

· <u> </u>		z % ¬	z 26
	*		
	r	Section 1971 ONLY 1971	
	u	O WOARY	· · · · · · · · · · · · · · · · · · ·
	¥		* * * * * * * * * * * * * * * * * * * *
	*		
	a a		
	2 2	CANSON	
	•		
		OUN AAT	
	*		

æ = •

# san iuan testing labo itory, inc.

907 WEST APACHE

PO. BOX 2079

FARMINGTON, NEW MEXICO

27-4966

		Dateune_tv1977
leport to	Hixon Development Comp	any
equested by	A. Kuchera. Mgr.	Sampled by <u>Hixon Personnel</u>
	CBU #5	Location NW NW Sec. 6, T25N, R12W
	Lower Gallup Produced	
Lab No.		for Petroleum Engineering
	1 E3	REJURIU

### WATER ANALYSIS FOR PETROLEUM ENGINEERING

Constituents

onstituent otal Solids H lesistivity lonductivity	2263 ppm 7.25 2.94 ohms/meter @70°F 3,400 micromhos/cm @ 70°F	Cations Sodium Calcium Magnesium Iron Barium	Meg/L 29.3 2.3 0.5 neg. 0	ppm 674 45 6 3
comments  Issentially the solution of the solu	is is a 0.2% sodium on.	Anions Chloride Bicarbonate Carbonate Hydroxide Sulfate	4.1 4.0 0 0 24.0	145 244 0 0 1150

Copies to_	Hixon Development Co.	(3)
•	P.O. Box 2810	
_	Farmington, New Mexico	87401

TECT NO 22096

Certified by:



#### INJECTION WELL

#### DATA SHEET

#### III. WELL DATA

#### PART A

- Carson Unit Well No. 33-18 1930' FSL, 1980' FEL Section 18, T 25N, R 11W
- 2. <u>Surface</u> <u>Casing</u>

Hole Size: 12-1/4" Casing: 8-5/8", 24#

Setting Depth: 109' with 100 sacks

Production Casing

Hole Size: 7-7/8"

Casing: 4-1/2", 9.5#

Setting Depth: 5045' with 150 sacks

PBD: 5032'

3. Tubing: 2-3/8"

Setting Depth: 4757'

4. Packer: Baker Model AD-1 Packer

Set at 4757' K.B.

#### PART B

- Injection Formation: Bisti Lower Gallup Field or Pool Name: Bisti Lower Gallup
- 2. Perforated Injection Intervals: 4899'-4919', 4928'-4940', 4969'-4975', 4982'-4997',

5001'-5018'

- 3. Well was drilled as a producing well.
- 4. None
- 5. Next Higher Oil and Gas Zone: Pictured Cliffs @ 1236'
  Next Lower Oil and Gas Zone: Dakota @ Unknown Depth

# HIXON DEVELOPMENT COMPANY INJECTION WELL SCHEMATIC

Well Name: Carson Unit Well No. 33-18 Location: 1930' FSL, 1980' FEL Section 18, T 25N, R 11W - Surface Casing: 8-5/8". 24# casing set at 109' K.B. with 100 sacks cement - Tubing: 2-3/8" Packer: Baker Model AD-1 Packer set at 4757' K.B. Perforations: 4899'-4919' 4928'-4940', 4969'-4975' 4982'-4997', 5001'-5018' TD: 5050' PBD: 50321 Production Casing: .4-1/2". 9.5# casing set at 5045! with 150 sacks cement

Well Name: C	Carson Unit 13-18	10 sk. surface marker 2
S	980' FSL, 750' FWL Sec. 18, T25N-R11W San Juan County, N.M.	25 sk. plug at base of surface csg. (180' - 94')
Well Type:	2 & A	35 sk. plug at 380' (380' - 258')
Spud Date: 1	I/11/60	
Surface Casing Hole Size: 1	12-1/4"	50 sk. plug at csg. stub (1240' - 1066')
Surface Casing Size: 8	3-5/8"	
Surface Casing Depth: 1	109'	Shot off 4-1/2" casing
Cementing Record: 1	100 sx.	at 1240'
	7-7/8" <b>1</b> -1/2"	}   {
<del>-</del>	5038'	\      }
_ ·	150 sx.	7-7/8" hole —
Perforations: 4	1874' - 4890'	
	1892' - 4898'	{      }
	1904' - 4912'	(1)
4	1954' - 4968'	<i>{</i>     <i>{</i>
4	1974' - 4984'	)     {
		20 sk. plug across
•	5040'	perforated interval
Plug-Back Depth: 5	5038'	(5038' - 4768')

Well Name:	Carson Unit 32-18	10 sk. surface marker
Legal Location:	1980' FNL, 1980' FEL Sec. 18, T25N-R11W San Juan County, N.M.	20 sk. plug at base of surface csg. (195' - 109')
Well Type:	P & A	50 sk. plug at 450' 2 (450' - 276')
Spud Date:	11/17/57	};
Surface Casing Hole Size: Surface Casing Size:	12-1/4" 8-5/8"	50 sk. plug at csg. stub (1297' - 1123')
Surface Casing Depth: Cementing Record:	124' 100 sx.	Shot off 4-1/2" casing 2 at 1297'
Production Casing Hole Size: Production Casing Size: Production Casing Depth: Cementing Record:	7-7/8" 4-1/2" 5020' 150 sx.	7-7/8" hole
Perforations:	4924' - 4935' 4940' - 4957' 4984' - 4990' 4998' - 5010'	
Total Depth: Plug-Back Depth:	5030' 5016'	20 sk. plug across perforated interval (5020' - 4750')

Well Name: Carson Unit 42-18 10 sk. surface marker 2 Legal Location: 1980' FNL, 660' FEL 25 sk. plug at base Sec. 18, T25N-R11W of surface csq. San Juan County, N.M. (171' - 85')Well Type: P&A 35 sk. plug at 480' (480' - 358') Spud Date: 10/17/59 50 sk. plug at csg. stub Surface Casing Hole Size: 12-1/4" (1219' - 1045') Surface Casing Size: 8-5/8" Surface Casing Depth: 101' Shot off 4-1/2" casing -2 Cementing Record: 100 sx. at 1219' Production Casing Hole Size: 7-7/8" Production Casing Size: 4-1/2" Production Casing Depth: 5085' Cementing Record: 150 sx. 7-7/8" hole Perforations: 4934' - 4961' 4990' - 4996' 5006' - 5014' 5024' - 5032' 20 sk. plug across

5085'

5075'

perforated interval

(5075' - 4805')

Total Depth:

Plug-Back Depth:

Well Name:

Carson Unit 113-17

Legal Location:

1980' FSL, 660' FWL Sec. 17, T25N-R11W San Juan County, N.M.

Well Type:

Gas Well

Spud Date:

11/13/58

Surface Casing Hole Size:

13-3/4" 10-3/4"

Surface Casing Size: Surface Casing Depth:

1205'

Cementing Record:

400 sx. 50:50 Pozmix

200 sx. CI 'B'

Production Casing Hole Size:

9"

Production Casing Size:

5-1/2"

Production Casing Depth: Cementing Record:

6004' 350 sx. at shoe;

250 sx. through DV tool at 5150'

Perforations:

4918' - 4936'

4942' - 4950'

5807' - 5826'

Total Depth:

11430'

Plug-Back Depth:

Well Name:

Carson Unit 31-18

Legal Location:

660' FNL, 1980' FEL Sec. 18, T25N-R11W San Juan County, N.M.

Well Type:

Oil Well

Spud Date:

1/27/60

Surface Casing Hole Size: Surface Casing Size: 12-1/4" 8-5/8" 107'

Surface Casing Depth:
Cementing Record:

100 sx.

Production Casing Hole Size: Production Casing Size:

7-7/8" 4-1/2"

Production Casing Size:
Production Casing Depth:

5067'

Cementing Record:

150 sx.

Perforations:

4920' - 4965'

4988' - 4998' 5004' - 5014'

5020' - 5030'

Total Depth:

5070'

Plug-Back Depth:

Well Name: Carson Unit 22-18

Legal Location: 1980' FNL, 1980' FWL

Sec. 18, T25N-R11W San Juan County, N.M.

Well Type: Oil Well

Spud Date: 1/19/60

Surface Casing Hole Size: 12-1/4"
Surface Casing Size: 8-5/8"
Surface Casing Depth: 109'
Cementing Record: 100 sx.

Production Casing Hole Size: 7-7/8"
Production Casing Size: 4-1/2"
Production Casing Depth: 5024'
Cementing Record: 150 sx.

Perforations: 4881' - 4891'

4895' - 4913' 4940' - 4944' 4954' - 4966' 4972' - 4982'

Total Depth: 5025' Plug-Back Depth: 4917'

Well Name:

Carson Unit 23-18

Legal Location:

1980' FSL, 1888' FWL Sec. 18, T25N-R11W San Juan County, N.M.

Well Type:

Water Injection

Spud Date:

2/16/58

Surface Casing Hole Size:

12-1/4"

Surface Casing Size:

8-5/8"

Surface Casing Depth:

102'

Cementing Record:

100 sx.

Production Casing Hole Size:

7-7/8"

Production Casing Size:

4-1/2"

Production Casing Depth:

5006'

Cementing Record:

150 sx.

Perforations:

4875' - 4891'

4901' - 4913'

4944' - 4951'

4965' - 4970'

4974' - 4984'

Total Depth:

5010'

Plug-Back Depth:

Well Name:

Carson Unit 24-18

Legal Location:

660' FSL, 1930' FWL Sec. 18, T25N-R11W San Juan County, N.M.

Well Type:

Water Injection

Spud Date:

4/28/59

Surface Casing Hole Size:

12-1/4"

Surface Casing Size: Surface Casing Depth: 8-5/8" 106'

Cementing Record:

100 sx.

Production Casing Hole Size:
Production Casing Size:

7-7/8" 4-1/2"

Production Casing Depth: Cementing Record:

5007' 150 sx.

Perforations:

4861' - 4889'

4894' - 4902' 4934' - 4941' 4948' - 4960'

4963' - 4976'

Total Depth:

5010'

Plug-Back Depth:

Well Name:

Carson Unit 34-18

Legal Location:

660' FSL, 1976' FEL Sec. 18, T25N-R11W San Juan County, N.M.

Well Type:

Oil Well

Spud Date:

8/17/57

Surface Casing Hole Size: Surface Casing Size: Surface Casing Depth: 12-1/4" 8-5/8" 176'

Cementing Record:

100 sx.

Production Casing Hole Size: Production Casing Size: Production Casing Depth: 7-7/8" 4-1/2"

Production Casing Dep Cementing Record:

5010' 150 sx.

Perforations:

4869' - 4886'

4900' - 4908' 4952' - 4958' 4971' - 4978'

Total Depth:

5014'

Plug-Back Depth:

Well Name:	Carson Unit 43-18	10 sk. surface marker
Legal Location:	1980' FSL, 660' FEL Sec. 18, T25N-R11W San Juan County, N.M.	25 sk. plug at base of surface csg. (180' - 94')
Well Type:	P & A	35 sk. plug at 475'
Spud Date:	2/8/58	(475' - 353')
Surface Casing Hole Size: Surface Casing Size:	12-1/4" 8-5/8"	50 sk. plug at csg. stub (1218' - 1044')
Surface Casing Depth: Cementing Record:	111' 100 sx.	Shot off 4-1/2" casing 2 at 1218'
Production Casing Hole Size: Production Casing Size: Production Casing Depth:	7-7/8" 4-1/2" 5070'	
Cementing Record:	150 sx.	7-7/8" hole
Perforations:	4932' - 4946' 4953' - 4971' 4995' - 5003' 5010' - 5024' 5028' - 5040'	
Total Depth: Plug-Back Depth:	5070' 5065'	20 sk. plug across perforated interval (5065' - 4795')

Well Name:

Carson Unit 44-18

Legal Location:

660' FSL, 659' FEL Sec. 18, T25N-R11W San Juan County, N.M.

Well Type:

Oil Well

Spud Date:

2/16/60

Surface Casing Hole Size: Surface Casing Size: Surface Casing Depth: Cementing Record: 12-1/4" 8-5/8" 99' 100 sx.

Production Casing Hole Size: Production Casing Size:

7-7/8" 4-1/2"

Production Casing Depth: Cementing Record:

5059' 150 sx.

Perforations:

4887' - 4906' 4914' - 4923' 4958' - 4964'

4958' - 4964' 4972' - 4982' 4991' - 4999'

Total Depth:

5060'

Plug-Back Depth:

Well Name:	Carson Unit 31-19	10 sk. surface marker 2
Legal Location:	710' FNL, 1924' FEL Sec. 18, T25N-R11W San Juan County, N.M.	25 sk. plug at base of surface csg. (120' - 37')
Well Type:	P & A	35 sk. plug at 420' (420' - 298')
Spud Date:	12/8/59	·
Surface Casing Hole Size: Surface Casing Size:	12-1/4 <b>"</b> 8-5/8"	50 sk. plug at csg. stub (1386' - 1212')
Surface Casing Depth:	105'	Shot off 4-1/2" casing
Cementing Record:	100 sx.	at 1386'
Production Casing Hole Size: Production Casing Size: Production Casing Depth: Cementing Record:	7-7/8" 4-1/2" 5029' 150 sx.	7-7/8" hole
Perforations:	4867' - 4895' 4900' - 4910' 4922' - 4926' 4940' - 4944' 4952' - 4958' 4964' - 4970' 4976' - 4982'	30 sk. plug at 4919' (4919' - 4513')
Total Depth:	5030'	The state of the s
Plug-Back Depth:	5029'	

# AFFIDAVIT OF PUBLICATION

No. 19368

STATE	OF	NEW	MEXICO
County	of S	an Jua	n:

Margaret Billingsley being duly
sworn, says: That he is the Sec. to the Publishet
THE FARMINGTON DAILY TIMES, a daily newspaper of general circulation published in English at Farmington, said county and state, and that the hereto attached
was published in a regular and entire issue of the said FARMINGTON DAILY Times, a daily newspaper duly qualified for the purpose within the
meaning of Chapter 167 of the 1937 Session Laws of the State of New
Mexico for NONSCOUNT (days) (1989) on the same day as
follows:
First Publication Jan. 13, 1987
Second Publication
Third Publication
Fourth Publication
and that payment therefor in the amount of \$ 6.23
has been made.  Margaret Blungsley
Subscribed and sworn to before me this day of 19
Connie Lyson
My Commission expires: Notary Public, San Juan County, New MEXICO

# Copy of Publication

NOTICE

NOTICE
Hixon Development Company.
PO Box 2810. Farmington. New
Mexico 87499, (505) 326-3325
whose agent is Aldrich L. Kuchera
hereby notifies interested parties
that the following well is to be converted to a water injection well.
Maximum rate will be 1200 BWPD
at less that 980 psi. Any request
for information or objections
should be filed with the Oil Conservation Division, State Land Office Building. PO Box 2088, Santa
Fe. New Mexico 87501 within 15
days.
Carson Unit Well 33-18, NW/4
SE/4, Section 18, T25N, R11W
Legal No. 19368 published in
the Farmington Daily Times, Farmington, New Mexico on Tuesday,
January 13, 1987.

Magnetic Attendance of

All the control