


Form 9-330

U. S. LAND OFFICE Santa Fe  
SERIAL NUMBER 078622  
LEASE OR PERMIT TO PROSPECT \_\_\_\_\_

UNITED STATES 3 1/4 of Sec. 1 is  
DEPT. OF THE INTERIOR Desig. Orig. Unit  
GEOLOGICAL SURVEY

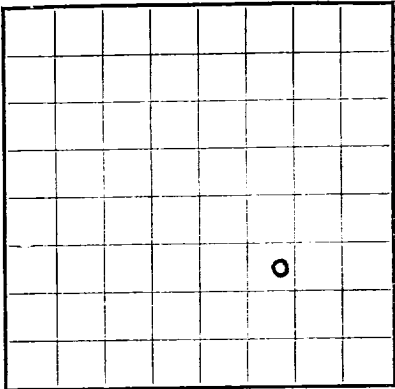

LOCATE WELL CORRECTLY

LOG OF OIL OR GAS WELL

Company J. R. Sharp Address P. O. Box 3307, Whittier Sta. Tulsa, Oklahoma  
Lessor or Tract Luthy Field S. Blanco (Ext) State N. Mex.  
Well No. 2 Sec. 1 T. 26N R. 8W Meridian N. M. P. M. County San Juan  
Location 1650 ft. N of S Line and 1490 ft. E of W Line of Section 1 Elevation 6157  
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed John A. Egan Title Agent  
Date July 17, 1952

The summary on this page is for the condition of the well at above date.

Commenced drilling June 11, 1952 Finished drilling July 2, 1952

OIL OR GAS SANDS OR ZONES  
(Denote gas by G)

No. 1, from 2176 G to 2260 No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

No. 1, from 450 to 550 No. 3, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from 850 to 950 No. 4, from \_\_\_\_\_ to \_\_\_\_\_

CASING RECORD

| Size casing                  | Weight per foot | Threads per inch | Make   | Amount | Kind of shoe | Cut and pulled from | Purpose    |
|------------------------------|-----------------|------------------|--------|--------|--------------|---------------------|------------|
| 10-3/4"                      | 40#             | 8 rd             | Net'l. | 97.31' | Baker        | --                  | Surface    |
| 7"                           | 20#             | 6 rd             | Net'l. | 2176'  | "            | --                  | Gas string |
| HIS LOGS ON OIL OR GAS WELLS |                 |                  |        |        |              |                     |            |

MUDDING AND CEMENTING RECORD

| Size casing | Where set | Number sacks of cement | Method used | Mud gravity | Amount of mud used |
|-------------|-----------|------------------------|-------------|-------------|--------------------|
| 10-3/4"     | 97.31'    | 10 sacks               | Pump-Plug   | 10          | Displaced          |
| 7"          | 2176'     | 100 Midgett            | " "         | 10          | -----              |

PLUGS AND ADAPTERS

Heaving plug—Material ----- Length ----- Depth set -----  
Adapters—Material ----- Size -----

SHOOTING RECORD

| Size   | Shell used | Explosive used | Quantity | Date    | Depth shot  | Depth cleaned out |
|--------|------------|----------------|----------|---------|-------------|-------------------|
| 5 1/2" | 5 1/2'     | Nitro-Gel.     | 300 qts. | 6-30-52 | 2184'-2252' | 2252'             |
|        |            |                |          |         |             |                   |
|        |            |                |          |         |             |                   |

TOOLS USED

Rotary tools were used from 0 feet to 2176 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet  
Cable tools were used from 2176 feet to 2260 feet, and from \_\_\_\_\_ feet to \_\_\_\_\_ feet

DATES

Nov. 26, 1952 Put to producing \_\_\_\_\_, 19\_\_\_\_

The production for the first 24 hours was ----- barrels of fluid of which -----% was oil; -----% emulsion; -----% water; and -----% sediment. Gravity, °Bé. -----

If gas well, cu. ft. per 24 hours 35000 (Est.) Gallons gasoline per 1,000 cu. ft. of gas -----

Rock pressure, lbs. per sq. in. 850 760

EMPLOYEES

Frank Marshall, Driller \_\_\_\_\_, Driller  
Robt. Grossman, Driller \_\_\_\_\_, Driller

FORMATION RECORD

| FROM— | TO—  | TOTAL FEET | FORMATION        |
|-------|------|------------|------------------|
| 0     | 250  | 250        | Sand & Shale     |
| 250   | 460  | 210        | shale            |
| 460   | 600  | 140        | sand             |
| 600   | 800  | 200        | Grey shale       |
| 800   | 950  | 100        | sand & shale     |
| 950   | 1450 | 500        | sand             |
| 1450  | 1550 | 100        | coarse hard sand |
| 1550  | 1950 | 400        | Dark grey sh     |
| 1950  | 2124 | 174        | Shale & coal     |
| 2124  | 2176 | 52         | Shale & coal     |
| 2176  | 2195 | 19         | Hard Sand        |
| 2195  | 2252 | 57         | Broken sd&sh     |
| 2252  | 2260 | 8          | Grey Shale PD    |

GEOLOGIC TOPS :

Base Ojo Alama 1520  
Fruitland 1850  
Pictured Cliffs 2176

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

LOCATE WITH COURTESY

[illegible]

STREET 10 30142 240 70 100

SECRET DOWNSIDE

## HISTORY OF OIL OR GAS WELL

U.S. GOVERNMENT PRINTING OFFICE: 1969-2-68081-2

REF ID: A66231

**PROBATION DEPARTMENT**

CLASS 2 FOOT

DATA:

325 143-13

FOR THE RECORD

2017.05.03

NOTES