

Form 9-331
(May 1963)UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPPLICATE*
(Other instructions on re-
verse side)Form approved.
Budget Bureau-No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

NOO-C-14-20-5339

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

Navajo Allotted

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Chaco Plant

9. WELL NO.

#19R

10. FIELD AND POOL, OR WILDCAT

NIPP PC Extension

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec 22 T26N R12W

12. COUNTY OR PARISH

San Juan

13. STATE

NM

1.

OIL WELL ☐ GAS WELL ☒ OTHER

2. NAME OF OPERATOR

Jerome P. McHugh

3. ADDRESS OF OPERATOR

Box 234, Farmington, NM 87401

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

790' FSL - 1500' FWL

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

6103' GR

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETS

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING


(Other) CSG

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

5-27-78

TD 1310'. Finished drlg 4-3/4" hole @ 10:30 a.m. Circulated and conditioned hole. Layed down drill pipe. Ran Welex IES log to TD. Prepared to run csg. Ran 44 jts 2-7/8" OD 6.4# CW-55 10R NUE Tbg for csg. TE 1306.59' set @ 1306' GR. Had good mud returns and reciprocated pipe while cementing. Preflushed hole w/100 gals mud sweep. Cemented by Fleet cementers w/75 sx 2% Lodense w/1/4# cello flake per sx followed by 50 sx neat w/1/4# cello flake per sx. Circulated 3-1/2 Bbls cement. Bumped plug w/1600 psi - released to 750 psi. Shut In. POR 6:50 p.m. 5-26-78.

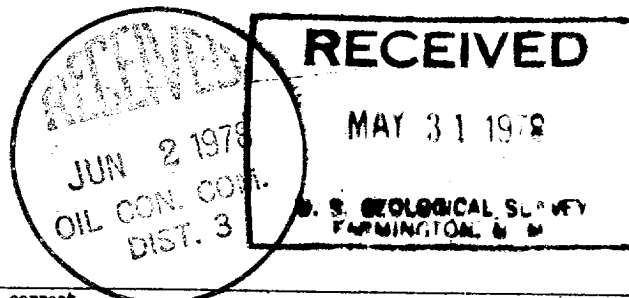

18. I hereby certify that the foregoing is true and correct

SIGNED

Thomas A. Dugan

TITLE

Agent

DATE

5-30-78

(This space for Federal or State office use)

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

*See Instructions on Reverse Side