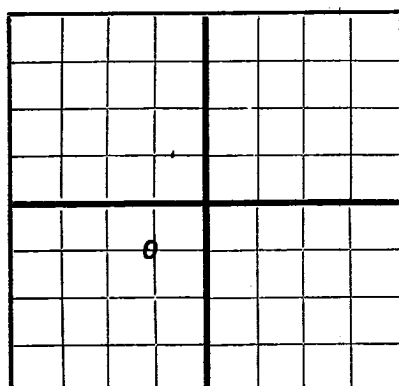


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Mac T. Anderson

P. O. Box 121, Mancos, Colorado

Company or Operator

Address

Allen M. Tomkin Fed Well No. I.-X in NE SW of Sec. 13, T. 27N. R. 12W

R. 12 W. N. M. P. M. Locat Field, San Juan County.

Well is 3300 feet south of the North line and 3308 feet west of the East line of Sec. 13, T. 27N. R. 12W

If State land the oil and gas lease is No. 222122 Assignment No.

If patented land the owner is Address

If Government land the permittee is Allen M. Tomkin Address Alamogordo, New Mexico

The Lessee is Address

Drilling commenced July 3, 1950 Drilling was completed August 31, 1950

Name of drilling contractor Charles Jenkins Address Santa Fe, N. M.

Elevation above sea level at top of casing 6064 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from G. 1660 to 1765 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 205 ft to 285 ft. feet Inexhaustible, to within 100 ft. of surface.

No. 2, from to feet

No. 3, from 305 to 305 feet Inexhaustible, to within

No. 4, from to feet 250 ft. of surface.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
15"				45		None	None		Surface
13"				300		All			Water
10"	40			695		All			Water
7"	20	10		1660		None			
1"				1740					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2"	15"	35	25	Hand		
	7"	1660	52	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
5 1/2"	48 ft.	Sol-100%	220 qts.	9/250	1680-1727	1770

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from feet to 1810 feet, and from feet to feet

PRODUCTION

Put to producing That in 9-7, 1950

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours 800000 cu. ft. Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

D. Thompson, Driller J. Sturgis, Driller

Richard Reilly, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 4th

day of September, 1950

Alma G. Norman Notary Public

My Commission expires July 8, 1951

Mancos, (Colorado) Co., N. M. 4-2-50

Name Mac T. Anderson

Position Owner

Representing Company or Operator

Address P. O. Box 121, Mancos, Colo.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	5	5	Soil
5	35	30	Mud
35	50	15	Sand
50	65	15	Shale
65	285	220	Sand
285	325	40	Shale
325	420	95	Sand
420	440	20	Shale
440	682	242	Sand
682	870	188	Shale
870	985	115	Sand
985	1005	20	Shale
1005	1050	45	Sand
1050	1090	40	Shale
1090	1110	20	Shale (Green)
1110	1120	10	Sand
1120	1240	120	Sandy Shale
1240	1345	105	Shale
1345	1350	5	Sand
1350	1435	85	Brown Shale
1435	1450	15	Sandy shale
1450	1480	30	Brown Shale
1480	1515	35	Grey Shale
1515	1620	105	Brown Shale & Coal
1620	1630	10	Coal (Coal Gas)
1630	1655	25	Shale and Coal
1655	1670	15	Grey Sand & Shale (T. P. C. 166)
1670	1680	10	Sand & Shale
1680	1695	15	Sand (Gas)
1695	1755	60	Sand, Shaley
1755	1800	45	Sandy shale
1800	1810	10	Shale - Total Depth