(Other instructions on reverse side)

Form approved. Budget Eureau No. 42-R1425.

UNITED STATES
DEPARTMENT OF THE INTERIOR

	30	04.	<u>;-</u>	2-4	1666	
5.	LEASE	DESIG	NACTO N	AND	SERIAL	No.
		~	~ ~ ~			

GEOLOGICAL SU	KAFA			SF-077329
APPLICATION FOR PERMIT TO DRIL	L, DEEPE	N, OR PLUG B	ACK_	6. IF INDIAN, ALAOTTEE OR TRIBE NAME
la. Type of work				7. UNIT AGREEMENT NAME
DRILL 🗵 DEEPE	IN L	PLUG BAC	.A Ц	
b. Type of Well  ord GAS Will Will Will A OTHER INFILL	313 20	NGLE X MULTIPL	.s	S. FARM OR LEASS NAME
WELL 1 WHILE WILL OTHER 114 122 2. NAME OF OPERATOR				Morris Gas Com "B" FPS
AMOCO PRODUCTION COMPANY 778				9. WELL NO.
3. ADDRESS OF OPERATOR	., .		-	10. FIZLD AND FOOL, OR WILDCAT
501 Airport Drive, Farmington, New 4. Lucation of well (Report location clearly and in accordan	Mexico ce with one S	8/401 tate requirements.*)	<u> </u>	Basin Dakota 7/599
At surface				11. SEC., T., R., M., OR ELK. AND SUNDEY OR ANEA
Mat proposed prod. zone	14775 (31	On	.3	SW/4, SW/4, Section 10
Same				T27N, RIOW 12. COUNTY OR PARISH   13. STATE
14. DISTANCE IN MILES AND DIRECTION FROM NEAREST TOWN O				
9 miles Southwest of Blanco, New Mex	(ICO   16, No	. OF ACRES IN LEASE	1 17. No.	1 - San Juan New Mexico
LOCATION TO NEAREST PROPERTY OR LEANS LINE, FT. 820		2560.00?1480	TO	320
(Also to nearest drig, unit line, if any) 18. DISTANCE FROM PROPOSED LOCATION*	19. PE	DEPTE GEROUG	20. кот	AEX OR CABLE TOOLS
TO NEAREST WELL, OFFILING, COMPLETED, OR APPLIED FOR, ON THIS LEASE, FT. 2970!		68121		Rotary
21. ELEVATIONS (Show whether DF, RT, GR, etc.)			3	22. APPROX. PATE WORK WILL START*
6307' GL			<u>`</u> :	As soon as permitted
	CASING AN	CEMENTING PROGRA	$r_{\mathcal{M}}$	
SIZE OF HOUS SIZE OF CASING WEIGHT	ILR FOOT	SETTING DEPTH		QUANTITY OF CEMENT
12-1/4" 8-5/8" (New) 24#	K-55	300 <b>'</b>	300 s	x Class B x 25 CaCl2-circ
7-7/8" 4-1/2" (New 10.	5≽ K <b>-</b> 55	6812'		Stage- 350 sx (CI B 50:50 FOZ Stage- 1147 sx (x 6% gel,2# med
			2nd 3	tuf plug/sx,.85
This application to drill an Infill	Pacin Sa	kota wall is		FLA $\times$ 100 sx CI
pursuant to Order No. R-1670-V appro	ved by t	he NMCCD on		g Rogert (Tail in)
May 22, 1979. This well will qualify	y under	Section 105	. :	and Adjunction Circumstance
of the Natural Gas Policy Act under	Order No	. R-1670-V.	DV To	ool set at 4890'.
The gas from this well is dedicated	tc El Pa:	so Natural	-	
Gas				A STANKE OF THE
0.57				NOW
H. C. V.				011 71900
Anna Anna Anna Anna Anna Anna Anna Anna				CON CO
				NOV 1 7 1980 OIL CON. COM. DIST. 3
IN ABOVE SPACE DESCRIBE PROPOSED PROGRAM: If proposal is	to deepen of	plug back, give data on 1	present pr	eductive none and brobosed for brouncity
zone. If proposal is to drill or deepen directionally, give po	ertitent data	on subsurface locations a	ind measu	red and true vertice, as. Give blowout
preventer pregram, R any.				
SIGNED W. F. Fetynony	Title	District Engl	neer_	bars October 3, 1980
(This space for Federal or State office use)				
PERMIT NO.		APPROVAL PAIS	•	
APPROVED BY Resident	_ Thus		<u></u>	DATE
CONDITIONS OF FORME CAMPANY				
1				

### OIL CONSERVATION DIVISION

STATE OF NEW MEXICO EHERGY AND MINERALS DEPARTMENT

### P. O. BOX 2088 SANTA FE, NEW MEXICO 87501

Form C-102 Revised 10-1-78

All distances must be from the outer houndaries of the Section.

			Lec	ISA			····	Well No.
Operator  NOGO PROD	UCTION COMPAN	ıv	Lec	MORRIS GAS	COM "	Bu		1E
AMOCO PROD	Section Corn Air	Township	<del></del>	Range		unty		
М	10	27N		10W		San Jua	ın	
Actual Footage Loc	cation of Well:			000		· ***	_4	
1110'	feet from the	South	line and	820 .	feet fro:	n the Wes		line Dedicated Acreage:
Ground Level Elev.			Poo	Basin Dako	<b>1</b>			320 Acres
6307	Dakota					• • • •		
<ol> <li>If more the interest a</li> <li>If more the interest a</li> </ol>	nd royalty).	s dedicated to	o the well, or	utline each an	d identif	y the owne	ership the	ereof (both as to working
dated by a  X Yes  If answer this form	No If a sis "no," list the if necessary.)	unitization, for	orce-pooling. s;' type of co	etc? onsolidation tions which ha	Commun	nitizati	on onsolidat	ted. (Use reverse side of nunitization, unitization,
No allowa forced-poo sion.	ble will be assig	e) or until a no	on-standard u	nit, eliminatio	ig such in	nterests, h	as been a	approved by the Commis-
3201	SF=079596	Sec.	10	SEC OC CAL FARMINGTON	curvilla N. 11-	Po Co D	tained here best of my  B.E. Frostion  DISTRIC  ompany  AMOCO  ate  MAY 21  I hereby shawn only notes of the control  under my is the of knowledge  May 1  Registered is mod or Land	ertify that the information concein is true and complete to the knowledge and belief.  ACKRELL  CT ENGINEER  PRODUCTION COMPANY  , 1980  certify that the well location field actual surveys made by me or supervision, and that the same and correct to the best of my e and belief.  ed SURVEYOR 1 SURV
394		-	The same				Certificate 1 3950	No. FRED D.

#### SUPPLEMENTAL INFORMATION TO FORM 9-331C

## MORRIS GAS COM "B" NO. IE 1110' FSL & 820' FWL, SECTION 10, T27N, RIOW SAN JUAN COUNTY, NEW MEXICO

The	geologic	name	of	the	surface	formation	is	the	Tertiary Nacimiento
	0000000								

Estimated tops of important geologic markers and potential water, oil, or gas bearing formations:

FORMATION	DEPTH	ELEVATION
Ojo Alamo	1138 <b>'</b>	+5138*
Kirtland	1356 <b>'</b>	+4964
Fruitland	1939 <b>'</b>	+43811
Pictured Cliffs	2219¹	+4101
Chacra (if present)	3522 <b>'</b>	+2798
Mesaverde Cliff House Point Lookout	3757' 4592 <b>'</b>	+2563 <b>+</b> 1728 <b>+</b>
Gallup	5738 <b>'</b>	+ 582*
Dakota	6612 <sup>†</sup>	- 292°
TD	6812 <sup>†</sup>	- 492

Estimated	KB	elevation:	6320	† 

Drilling fluid to TD will be a fresh water, low solids non-dispersed mud system. Open hole logging program will include logs from TD to below surface casing:

SP-Induction-GR FDC-CNL-GR


Completion design will be based on these logs. No cores or drill stem tests will be taken.

Operations will commence when permitted and last approximately 3 weeks.

Amoco's standard blowout prevention will be employed (see attached drawing).

In the past, drilling in this area has shown that no abnormal pressures, temperatures, nor hydrogen sulfide gas will be encountered.

- Blowout Preventers and Master Valve to be fluid operated, and all fittings must be in 1.. good condition.
- Equipment through which bit must pass shall be as large as the inside diameter of the 2. casing that is being drilled through.
- Nipple above Blowout Preventer shall be same size or larger than BOP being drilled through.
- All fittings to be flanged. 4.
- Cmsco or comparable safety valve must be available on rig floor at all times with 5. proper connection or sub. The I.D. of safety valve should be as great as I.D. of tool joints of drill pipe, or at least as great as I.D. of drill collars.

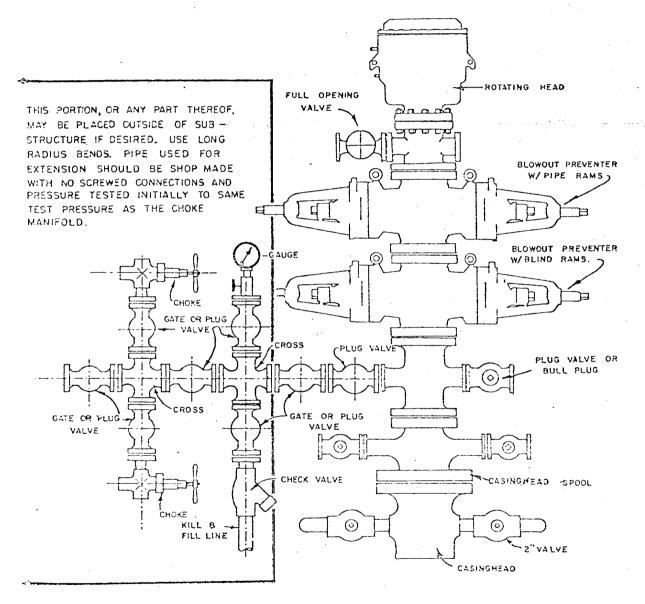

### BLOWOUT PREVENTER HOOKUP

API Series # 900

EXHIBIT D-4

Operation of BOP by closing both pipe and blind rams will be tested each trip or, on long bit runs, pipe rams will be closed once each 24 hours.

OCTOBER 16,1959

### MULTI-POINT SURFACE USE PLAN

# MORRIS GAS COM "B" NO. 1E 1110' FSL & 820' FWL, SECTION 10, T27N, RIOW SAN JUAN COUNTY, NEW MEXICO

- 1. The attached topographic map shows the proposed route to the location.
- 2. It will not be necessary to build any access road.
- Existing oil and gas wells within a one-mile radius of our proposed well have been spotted on the lease road map.
- 4. There is a 380-barrel tank and facilities located at Morris Gas Com "B" Well No. 1, approximately three-fourths mile north.
- 5. Water will be hauled from Kutz Wash water holes.
- 6. No construction materials will be hauled in for this location.
- 7. A 150' by 150' pit will be built on location to hold all drilling waste.

  Upon completion of the well, pit will be fenced and waste and liquids

  left to dry, then pit will be filled and leveled. If any liquids remain,

  they will be hauled away prior to back filling.
- 8. There are neither airstrips nor camps in the vicinity.
- 9. The well site layout, reserve, burn and trash pits are shown on the attached Drill Site Specification Sheet. It will not be necessary to make any cuts.
- 10. Restoration of the surface will be accomplished by cleaning up and leveling upon completion of the well. Reseeding of the site will be carried out according to Bureau of Land Management specifications.
- II. The general topography is a broken slope with rocky deposits, sloping to the north, with soil a sandy clayey loam; vegetation consists of pinon, juniper, rabbit brush and some grasses.

Representatives of the U. S. Geological Survey's Farmington Office and the Bureau of Land Management inspected the site with Amoco personnel. Cultural resources inspection was conducted by an archaeologist from San Juan College.

12. Operator's Representative: R. W. Schroeder

Phone: Office: 505-325-8341; Home: 505-325-6164 Address: 501 Airport Drive, Farmington, NM 87401

Certification: I hereby certify that I, or persons under my direct supervision, have inspected the proposed drillsite and access route, that I am familiar with the conditions which presently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and, that the work associated with the operations proposed herein will be performed by AMOCO PRODUCTION COMPANY and its contractors and sub-contractors in conformity with this plan and the terms and conditions under which it is approved.

Date September 29, 1980

R. W. Schroeder, District Superintendent