



Form 9-330

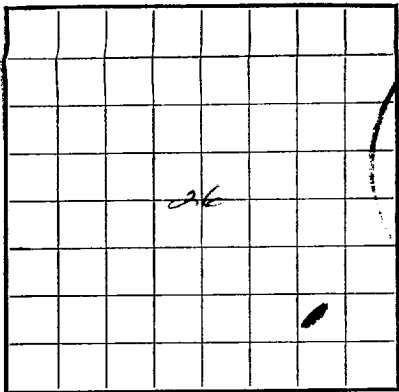

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company The Ohio Oil Company Address P. O. Box 120, Casper, Wyoming
Lessor or Tract Government Field Basin Dakota State New Mexico
Well No. 3-26 Sec. 26 T. 28N R. 11W Meridian County San Juan
Location 1090 ft. ^[N.]~~[S.]~~ of S Line and 990 ft. ^[E.]~~[W.]~~ of E Line of Section 26 Elevation 5605 KB
(Derrick floor relative to sea level)
The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.
Signed N. J. Brinster
Date November 25, 1960 Title Division Production Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling September 16, 1960 Finished drilling October 14, 1960

OIL OR GAS SANDS OR ZONES
(Denote gas by G)

No. 1, from 3910' to 6195' No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
10-3/4	32.75	8-11		30.64					Surface
10-3/4	40.00	10-11		197.28	Baker Guide Shoe				Surface
5-1/2	17.00	8-9		6222.28	Baker Guide Shoe		5990-6000		Production
							6016-20	6068-88	
							6095-119	6141-45	
							6158-74	6178-95	

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
10-3/4	239.72 KB	225	Halliburton		
5-1/2	6235.43 KB	725	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out

TOOLS USED

Rotary tools were used from _____ feet to 6236 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

November 14, 1960 Put to producing _____, 19____
The production for the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °Bé. _____
If gas well, cu. ft. per 24 hours 7662 MCF (CAP) Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. 2051

EMPLOYEES

_____, Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
Schlumberger	Log Tops - all measurements from KB.		
			Top of Fruitland 1315'
			Pictured Cliff 1528'
			Lewis Shale 1610'
			Cliff House 3043'
			Menefee 3208'
			Point Lookout 3888'
			Mancos 4200'
			Callup 5090'
			Sanastee 5531'
			Greenhorn 5892'
			Graneros 5943'
			Dakota 6062'

