




U. S. LAND OFFICE Santa Fe
SERIAL NUMBER NM 013365
LEASE OR PERMIT TO PROSPECT _____

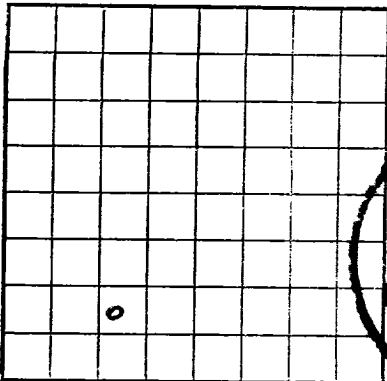

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY



LOG OF OIL OR GAS WELL

LOCATE WELL CORRECTLY

Company R & G DRILLING CO., INC. Address Box 1848, Farmington, N. M.
Lessor or Tract Phillips Field Undesignated State New Mexico
Well No. 27 Sec. 22 T. 28N R. 11W Meridian N. M. P. M. County San Juan
Location 1000 ft. N. of S Line and 1765 ft. E. of W Line of Sec. 22 Elevation 5600 ft. (Derrier floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Date December 20, 1956 Signed [Signature] Title President

The summary on this page is for the condition of the well at above date.

Commenced drilling November 6, 1956 Finished drilling November 20, 1956

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 710 to 718 G No. 4, from 1600 to 1624 G
No. 2, from 1348 to 1358 G No. 5, from _____ to _____
No. 3, from 1560 to 1566 G No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 5/8"	24	8	CFI	96	None		710	718	
5 1/2"	14	8	"	1678	HOMCO		1348	1358	
							1560	1566	
							1600	1624	
2"	4.6	8	"	718					

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 5/8"	96'	50	Halliburton	Water	
5 1/2"	1678'	200	HOMCO	Water	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
5/8"	Jets	Jets	40	12-6	710-718	
"	"	"	40	12-6	1348-1358	
"	"	"	24	12-6	1560-1566	
"	"	"	96	12-6	1600-1624	

TOOLS USED

Rotary tools were used from 0 feet to 1678 feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

December 20, 1956 Put to producing _____, 19____

The production for the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, °Bé. _____

If gas well, cu. ft. per 24 hours 2000 MCF Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. 360

EMPLOYEES

_____, Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION	
710	718	10	Farmington	Sand
1348	1358	10	Fruitland	Sand
1560	1566	6	Pictured Cliffs	Sand
1600	1624	24	Pictured Cliffs	Sand

(OVER)

